





使用温度范围 (Ambient temperature Range): -25° ~ +85°
 适用基板厚度 (Applicable PCboard thickness): 0.8mm ~ 1.6mm
 额定电压 (Voltage rating): 50V AC, DC
 额定电流 (Current rating): 1A
 接触电阻 (Contact Resistance): ≤ 0.01 Ω
 绝缘电阻 (Insulation Resistance): ≥ 500M Ω
 耐压 (Withstand Voltage): 500V/min
 材料 (Material)
 1. 基座: LCP 94V-0 or ul
 2. 插针: 黄铜

1.25直针	A-mm	B-mm
1.25-2P	1.25mm	4.50mm
1.25-3P	2.50mm	5.75mm
1.25-4P	3.75mm	7.00mm
1.25-5P	5.00mm	8.25mm
1.25-6P	6.25mm	9.50mm
1.25-7P	7.50mm	10.75mm
1.25-8P	8.75mm	12.00mm
1.25-9P	10.00mm	13.25mm
1.25-10P	11.25mm	14.50mm
1.25-11P	12.50mm	15.75mm
1.25-12P	13.75mm	17.00mm
1.25-13P	15.00mm	18.25mm
1.25-14P	16.25mm	19.50mm
1.25-15P	17.50mm	20.75mm
1.25-16P	18.75mm	22.00mm

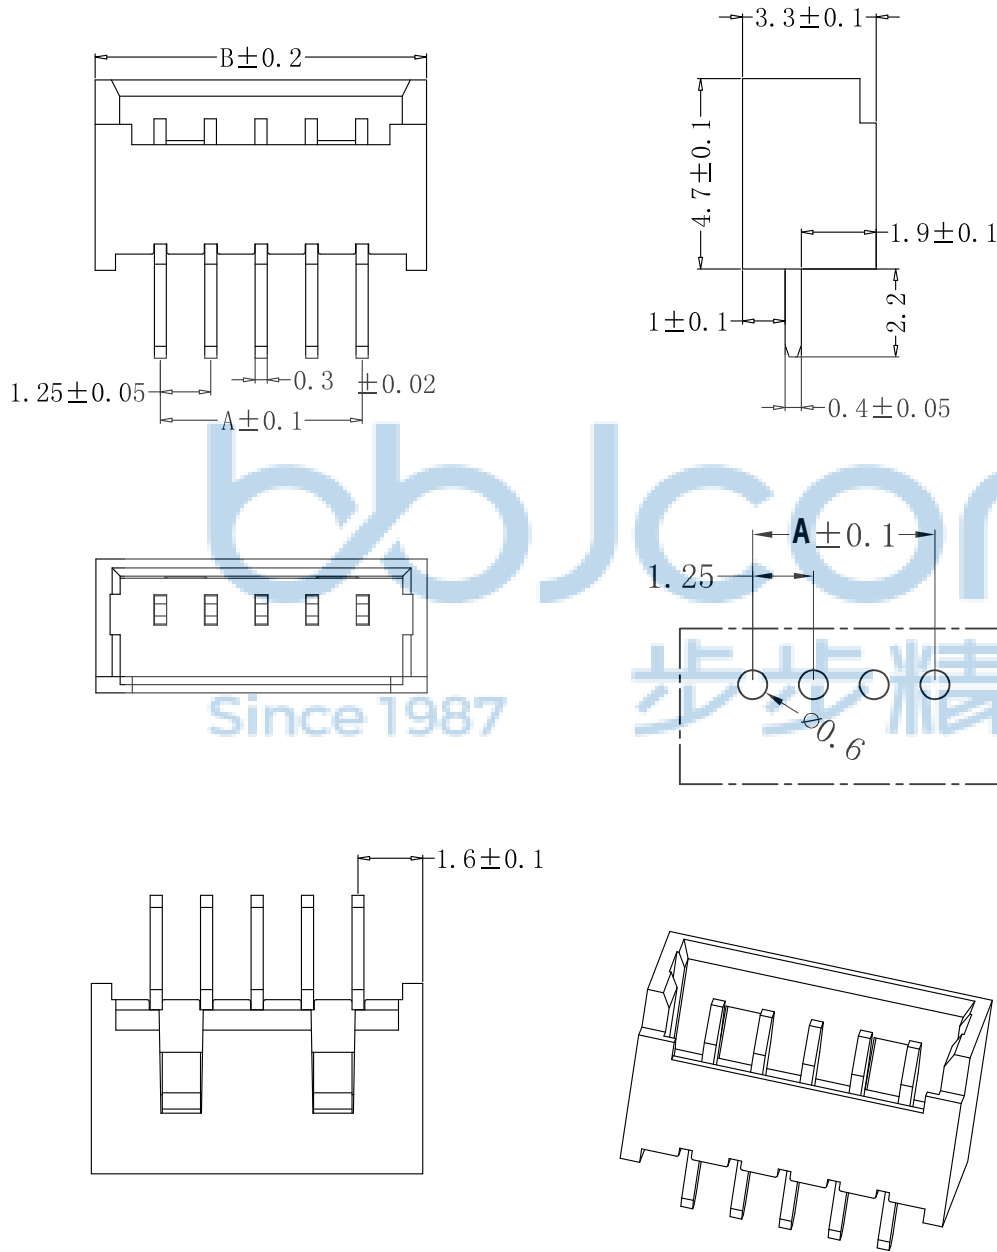


THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司		NAME: 1.25-8A 闭口直针 米黄色	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3" X*: ±2" .XX*: ±1"		APPD. JM_Zheng CHKD. LYX	
PDWG.NO: 0102-1		DR. SGF		PJ. NO.: WT.04.65-11-1002 SIZE: A4 DRW NO.: FINISH: SEE NOTES MAT'L.: SEE NOTES SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2	

PE袋规格:***X*** (以实际出货为准)

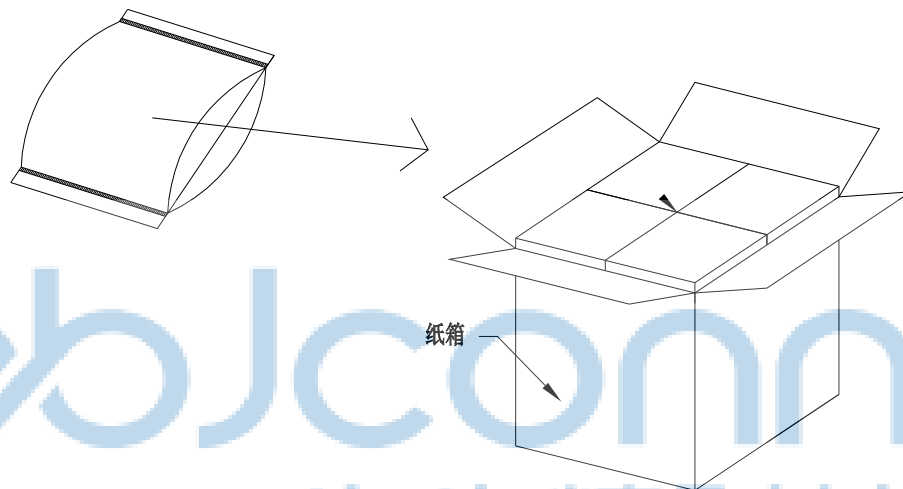

成品标签



1. 包装要求:

1.1 每PE袋包装 500 pcs;

1.2 每1袋放一小纸盒;

1.3 每20个小纸盒放一个纸箱, 共计**10000PCS**

1.4 纸箱外贴上标签



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
PDWG.NO: 0102-1		NAME: 1.25-8A 闭口直针 米黄色	
APPD.	JM_Zheng	PJ. NO.: WT.04.65-11-1002	
CHKD.	LYX	SIZE: A4 DRW NO.:	
DR.	SGF	FINISH: SEE NOTES	MAT'L.: SEE NOTES
		SCALE: N/A	REV.: A0 UNIT: mm PAGE: 2/2