


REV.	ECN NO	CONTENT	DATE	ENGINEER
A0				



使用温度范围 (Ambient temperature Range): $-25^{\circ} \sim +85^{\circ}$
适用基板厚度 Applicable PCboard thickness): 0.8mm~1.6mm
额定电压 (Voltage rating): 50V AC, DC
额定电流 (Current rating): 1A
接触电阻 Contact Resistance): $\leq 0.01 \Omega$
绝缘电阻 (Insulation Resistance): $\geq 500M \Omega$
耐压 (Withstand Voltange): 500V/min
材料 (Material)
1. 基座: PA66 UL94V-2(0)
2. 插针: 黄铜

孔位	A-mm	B-mm
2P	1.5	4.5
3P	3.0	6.0
4P	4.5	7.5
5P	6.0	9.0
6P	7.5	10.5
7P	9.0	12.0
8P	10.5	13.5
9P	12.0	15.0
10P	13.5	16.5
11P	15.0	18.0
12P	16.5	19.5
13P	18.0	21.0
14P	19.5	22.5
15P	21.0	24.0
16P	22.5	25.5

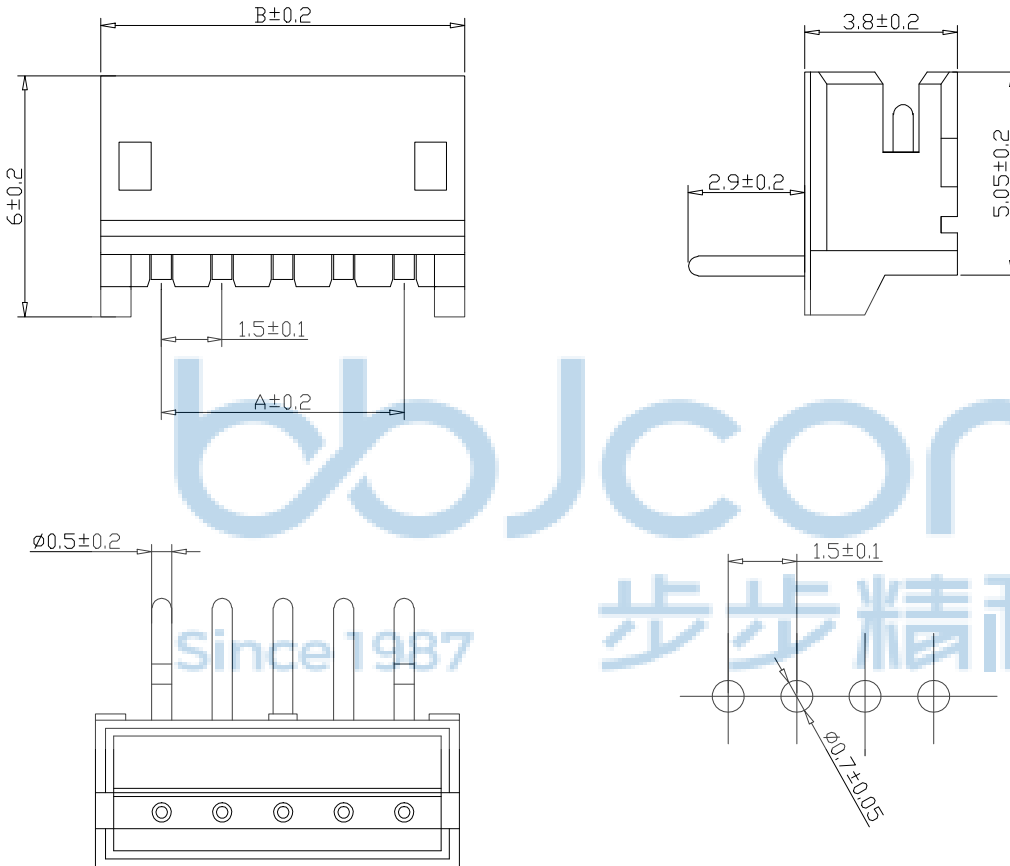

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
PDWG.NO: 0102-1	DR. SGF	NAME: ZH-3AWD (1.5-3P) 闭口弯针 带定位 米黄色	
APPD. JM_Zheng	CHKD. LYX	PJ. NO.: WT.05.65-21-1002	
		SIZE: A4	DRW NO.:
		FINISH: SEE NOTES	MAT'L.: SEE NOTES
		SCALE: N/A	REV.: A0
		UNIT: mm	PAGE: 1/2

PE袋规格:***X*** (以实际出货为准)

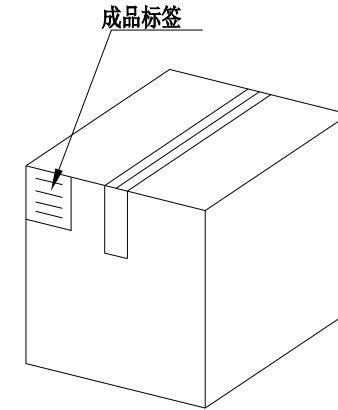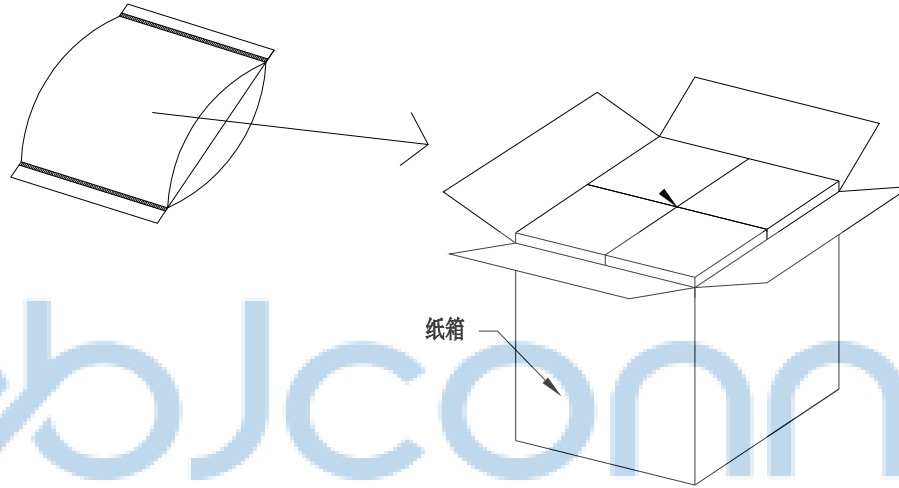

1. 包装要求:

1.1 每PE袋包装 2000pcs;

1.2 每1袋放一小纸盒;

1.3 每20个小纸盒放一个纸箱, 共计40000PCS

1.4 纸箱外贴上标签



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG,NO: 0102-1		深圳市步步精科技有限公司				
		.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X": ±3" .X": ±2" .XX": ±1"		
	NAME: ZH-3AWD (1.5-3P) 闭口弯针 带定位 米黄色					
	APPD.	JM_Zheng		PJ. NO.: WT.05.65-21-1002		
	CHKD.	LYX		SIZE: A4 DRW NO.:		
			FINISH: SEE NOTES		MAT'L.: SEE NOTES	
			SCALE: N/A REV.: A0		UNIT: mm PAGE: 2/2	