


| REV. | ECN NO | CONTENT | DATE | ENGINEER |
|------|--------|---------|------|----------|
| A0   |        |         |      |          |

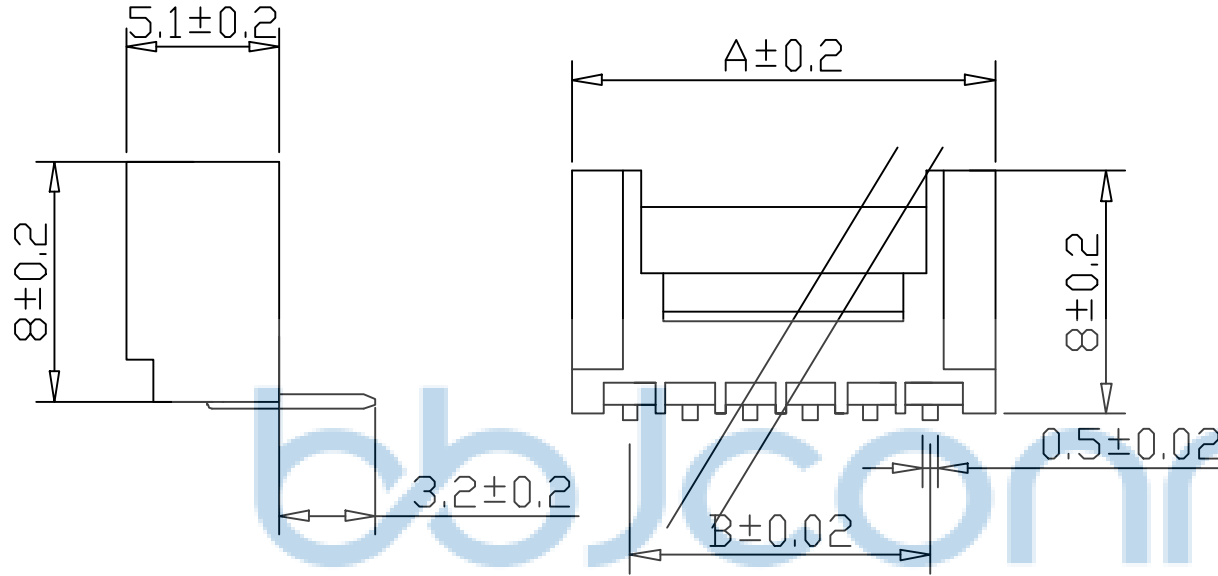

使用温度范围 (Ambient temperature Range):  $-25^{\circ} \sim +85^{\circ}$   
 适用基板厚度 (Applicable PCboard thickness): 0.8mm ~ 1.6mm  
 额定电压 (Voltage rating): 250V AC, DC  
 额定电流 (Current rating): 2A  
 接触电阻 (Contact Resistance):  $\leq 0.01\Omega$   
 绝缘电阻 (Insulation Resistance):  $\geq 1000M\Omega$   
 耐压 (Withstand Voltage): 800V/min  
 材料 (Material)  
 1. 基座: PA66 FV2  
 2. 插针: 黄铜

| 孔位 | A    | B    |
|----|------|------|
| 2  | 6.0  | 2.0  |
| 3  | 8.0  | 4.0  |
| 4  | 10.0 | 6.0  |
| 5  | 12.0 | 8.0  |
| 6  | 14.0 | 10.0 |
| 7  | 16.0 | 12.0 |
| 8  | 18.0 | 14.0 |
| 9  | 20.0 | 16.0 |
| 10 | 22.0 | 18.0 |
| 11 | 24.0 | 20.0 |
| 12 | 26.0 | 22.0 |
| 13 | 28.0 | 24.0 |
| 14 | 30.0 | 26.0 |
| 15 | 32.0 | 28.0 |



| 范围 | >0-3       | >3-18     | >18-50    | >50-100   |
|----|------------|-----------|-----------|-----------|
| 公差 | $\pm 0.15$ | $\pm 0.2$ | $\pm 0.3$ | $\pm 0.5$ |



|                                                                                                                                                             |          |              |                           |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|--------------|---------------------------|
| THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. |          | 深圳市步步精科技有限公司 |                           |
| APPD.                                                                                                                                                       | JM_Zheng | NAME:        | HY-6AW (2.0-6P) 弯针 带扣 米黄色 |
| CHKD.                                                                                                                                                       | LYX      | PJ. NO.:     | WT.01.63-21-1002          |
| DR.                                                                                                                                                         | SGF      | SIZE:        | A4                        |
| PDWG.NO:                                                                                                                                                    | 0102-1   | FINISH:      | SEE NOTES                 |
|                                                                                                                                                             |          | SCALE:       | N/A                       |
|                                                                                                                                                             |          | REV.:        | A0                        |
|                                                                                                                                                             |          | UNIT:        | mm                        |
|                                                                                                                                                             |          | PAGE:        | 1/2                       |

| REV. | ECN NO | CONTENT | DATE | ENGINEER |
|------|--------|---------|------|----------|
| A0   |        |         |      |          |

PE袋规格:\*\*\*X\*\*\* (以实际出货为准)

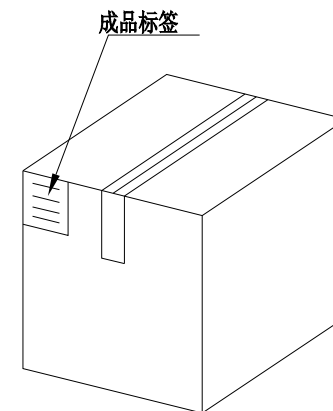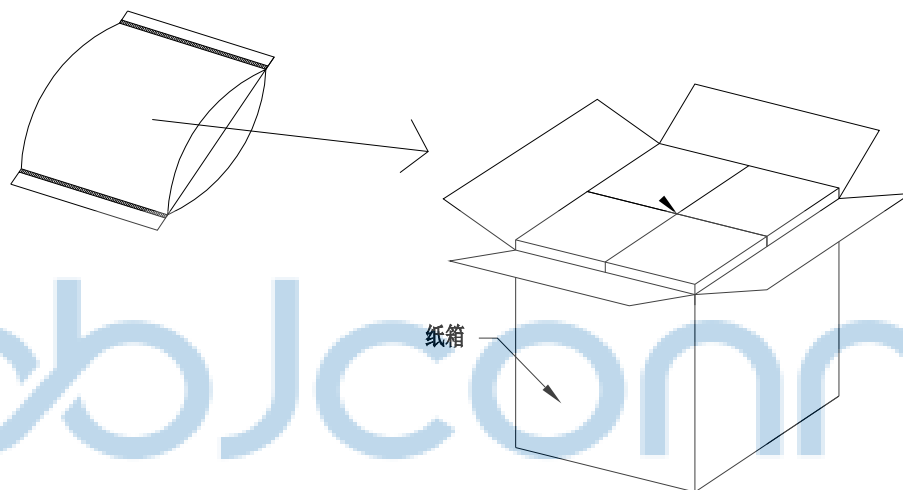

## 1. 包装要求:

- 1.1 每PE袋包装 2000pcs;
- 1.2 每1袋放一小纸盒;
- 1.3 每20个小纸盒放一个纸箱, 共计40000PCS
- 1.4 纸箱外贴上标签



|                                                                                                                                                             |  |                                  |  |                                 |  |  |  |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------|--|----------------------------------|--|---------------------------------|--|--|--|
| THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. |  |                                  |  | 深圳市步步精科技有限公司                    |  |  |  |
| .X: ±0.38<br>.XX: ±0.25<br>.XXX: ±0.13                                                                                                                      |  | X": ±3"<br>.X": ±2"<br>.XX": ±1" |  | NAME: HY-6AW (2.0-6P) 弯针 带扣 米黄色 |  |  |  |
| APPD. JM_Zheng                                                                                                                                              |  | CHKD. LYX                        |  | PJ. NO.: WT.01.63-21-1002       |  |  |  |
| DR. SGF                                                                                                                                                     |  | SCALE: N/A                       |  | FINISH: SEE NOTES               |  |  |  |
| PDWG.NO: 0102-1                                                                                                                                             |  | REV.: A0                         |  | MAT'L.: SEE NOTES               |  |  |  |
|                                                                                                                                                             |  | UNIT: mm                         |  | PAGE: 2/2                       |  |  |  |