


REV.	ECN NO	CONTENT	DATE	ENGINEER
A0				

使用温度范围 (Ambient temperature Range): $-25^{\circ} \sim +85^{\circ}$
适用线规 (Applicable Wires): AWG 28#~22#
适用基板厚度 (Applicable PCboard thickness): 0.8mm~1.6mm
额定电压 (Voltage rating): 500V AC, DC
额定电流 (Current rating): 2A
接触电阻 (Contact Resistance): $\leq 0.03 \Omega$
绝缘电阻 (Insulation Resistance): $\geq 500M \Omega$
耐压 (Withstand Voltage): 500V/min
材料 (Material)


1. 基座: PA66
2. 插针: 黄铜

孔位	A	B
2	6.0	2.0
3	8.0	4.0
4	10.0	6.0
5	12.0	8.0
6	14.0	10.0
7	16.0	12.0
8	18.0	14.0
9	20.0	16.0
10	22.0	18.0
11	24.0	20.0
12	26.0	22.0
13	28.0	24.0
14	30.0	26.0
15	32.0	28.0

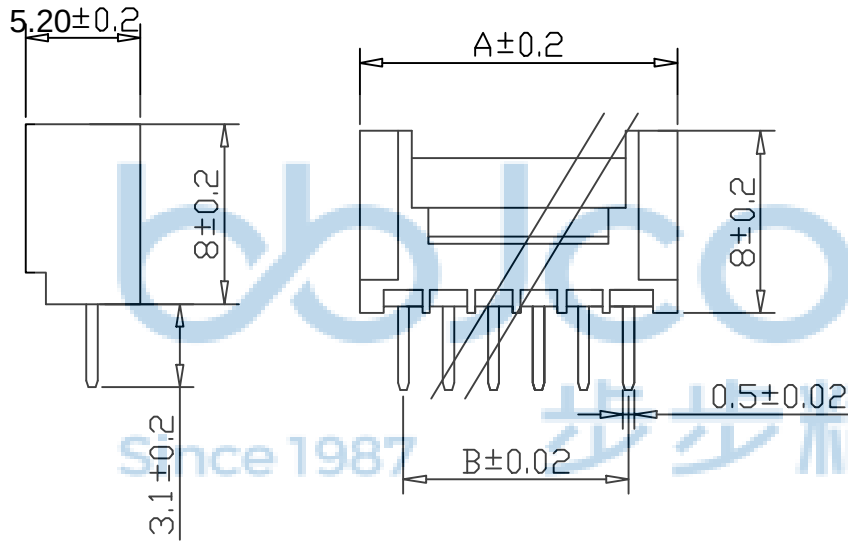


THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
PJ. NO.:	WT.01.33-11-1001	NAME: HY-4A (2.0-4P) 直针 带扣 黑色	
SIZE: A4	DRW NO.:	APPD. JM_Zheng	
FINISH: SEE NOTES	MAT'L.: SEE NOTES	CHKD. LYX	
SCALE: N/A	REV.: A0	DR. SGF	
UNIT: mm	PAGE: 1/2	PDWG.NO: 0102-1	

PE袋规格:***X*** (以实际出货为准)

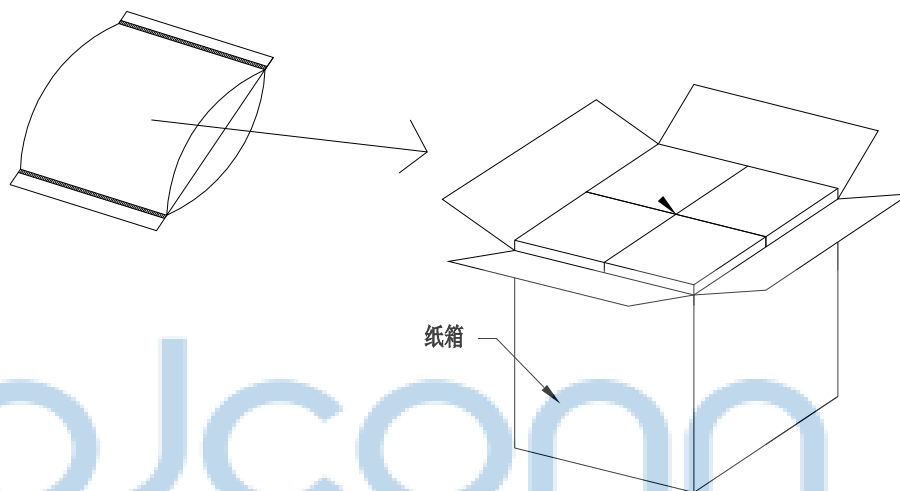

成品标签



1. 包装要求:

- 1.1 每PE袋包装2000 pcs;
- 1.2 每1袋放一小纸盒;
- 1.3 每20个小纸盒放一个纸箱, 共计40000PCS
- 1.4 纸箱外贴上标签



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWGW.NO: 0102-1		JB 深圳市步步精科技有限公司 .X: ±0.38 .XX: ±0.25 .XXX: ±0.13 X': ±3' .X': ±2' .XX': ±1' NAME: HY-4A (2.0-4P) 直针 带扣 黑色 PJ. NO.: WT.01.33-11-1001 SIZE: A4 DRW NO.: FINISH: SEE NOTES MAT'L.: SEE NOTES SCALE: N/A REV: A0 UNIT: mm PAGE: 2/2	
APPD. JM_Zheng			
CHKD. LYX			
DR. SGF			