
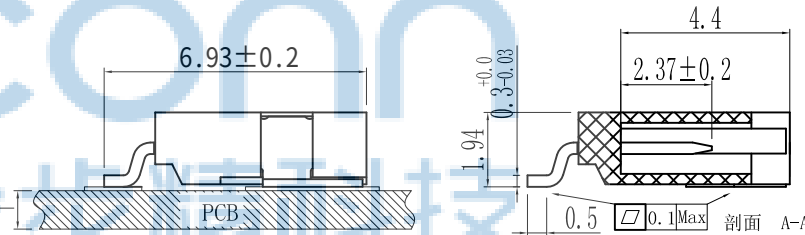
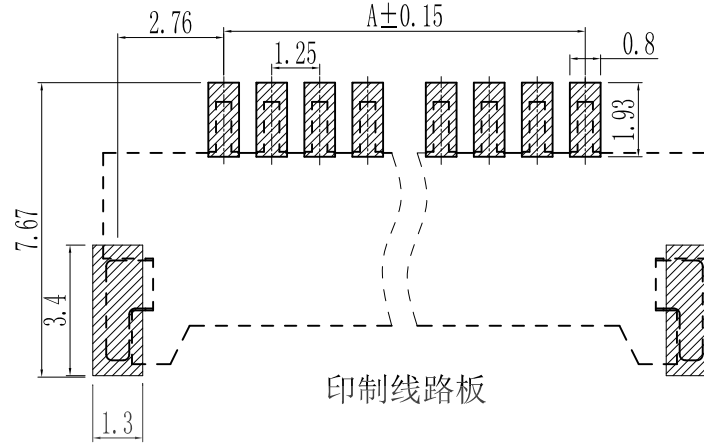
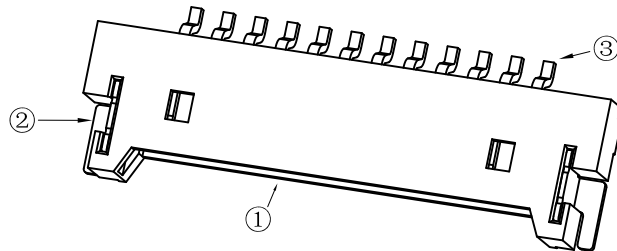
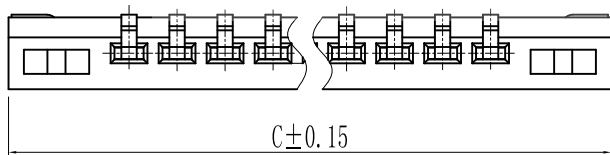
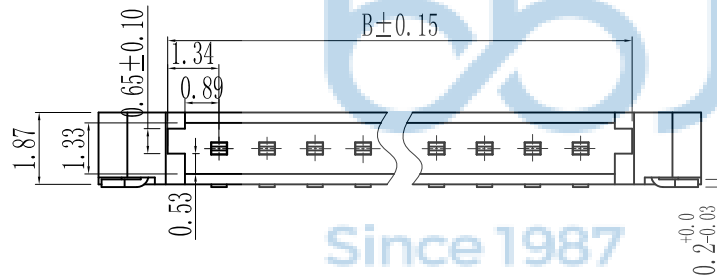


REV.	ECN NO	CONTENT	DATE	ENGINEER
A0				

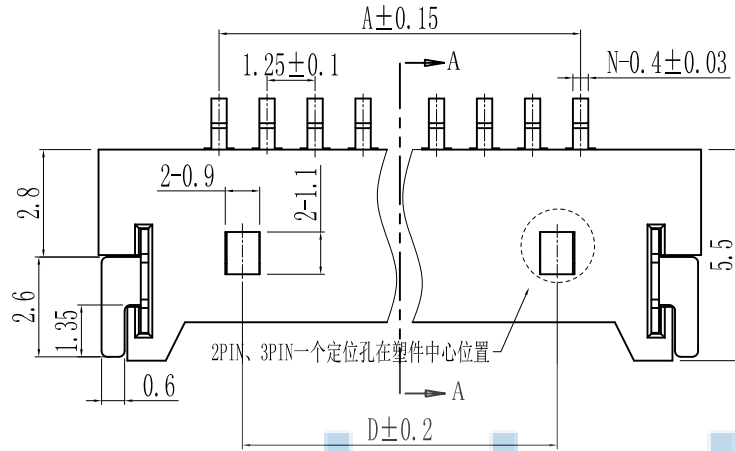

1. 技术参数:
- 1.1 额定电流: 1.0A AC/DC
 - 1.2 额定电压: 125V AC/DC
 - 1.3 耐电压: 500V AC/minute
 - 1.4 接触电阻: 20mΩ MAX
 - 1.5 绝缘电阻: 100MΩ MIN
 - 2. 工作温度: -25℃~+85℃


Circuits	Dimensions (mm)			
	A	B	C	D
2PIN	1.25	3.90	7.50	/
3PIN	2.50	5.15	8.75	/
4PIN	3.75	6.40	10.00	2.50
5PIN	5.00	7.65	11.25	3.75
6PIN	6.25	8.90	12.50	5.00
7PIN	7.50	10.15	13.75	6.25
8PIN	8.75	11.40	15.00	7.50
9PIN	10.0	12.65	16.25	8.75
10PIN	11.25	13.90	17.50	10.0
11IN	12.50	15.15	18.75	11.25
12PIN	13.75	16.40	20.00	12.50
13PIN	15.00	17.65	21.25	13.75
14PIN	16.25	18.90	22.50	15.00
15PIN	17.50	20.15	23.75	16.25
16PIN	18.75	21.40	25.00	17.50

NO	物料名称	数量 (PCS)	材质	镀涂
①	塑胶件	1 PCS	LCPR835	本色
②	焊片	2 PCS	磷铜	锡
③	PIN针	2~16 PCS	磷铜	镀金



THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co., Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0013-1

深圳市步步精科技有限公司			
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X*: ±3* .X*: ±2* .XX*: ±1*	NAME: 针座 1.25-2P 超薄卧贴 镀金 米黄色	
APPD. JM_Zheng		PJ. NO.: WT.04.66-73-H005	
CHKD. LYX		SIZE: A4 DRW NO.:	
DR. SGF		FINISH: SEE NOTES	MAT'L.: SEE NOTES
		SCALE: N/A	REV.: A0 UNIT: mm PAGE: 1/2

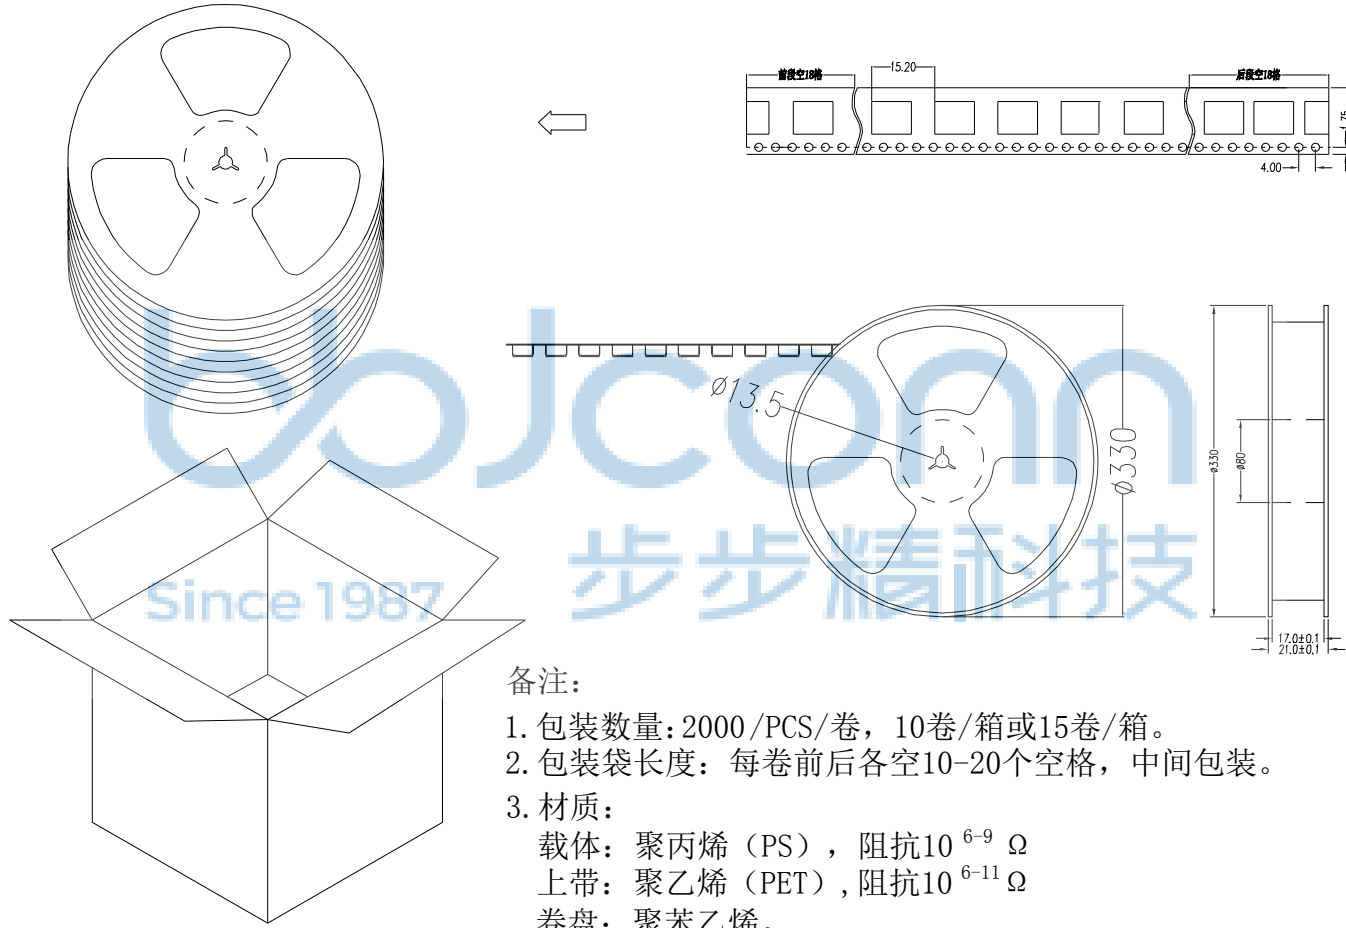

备注:

1. 包装数量: 2000 /PCS/ 卷, 10卷/箱或15卷/箱。
2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
3. 材质:
载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
卷盘: 聚苯乙烯。

纸箱规格: 345*345*23MM
纸箱规格: 345*345*35MM



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13		NAME: 针座 1.25-2P 超薄卧贴 镀金 米黄色	
APPD. JM_Zheng		PJ. NO.: WT.04.66-73-H005	
CHKD. LYX		SIZE: A4 DRW NO.:	
PDWG.NO: 0013-1		FINISH: SEE NOTES MAT'L.: SEE NOTES	
DR. SGF		SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	