

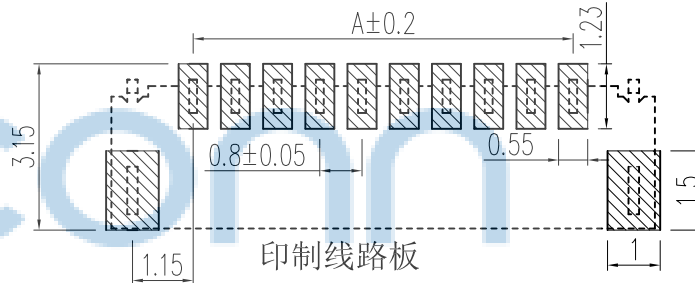
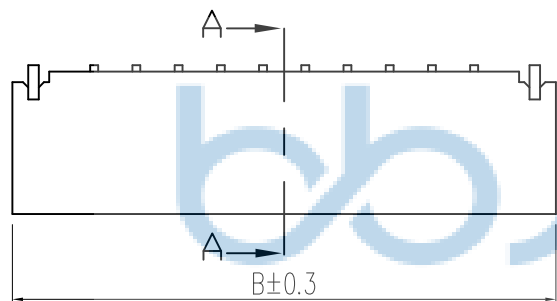
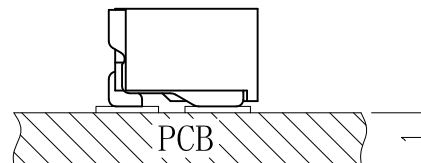




REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0				

1. 技术参数:
 1.1 额定电流: 0.5A AC/DC
 1.2 额定电压: 50V
 1.3 耐电压: 500V ACminute
 1.4 接触电阻: 20mΩ MAX
 1.5 绝缘电阻: 100MΩ MIN
 2. 工作温度: -25°C ~ +85°C

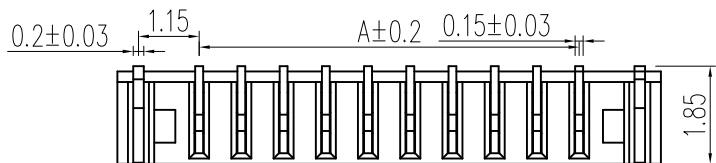

Since 1987

步步精科技

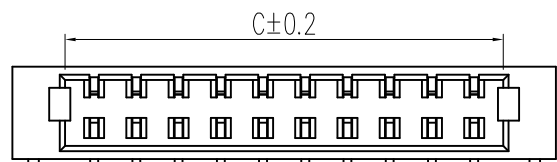

Circuits	Dimensions (mm)			Circuits	Dimensions (mm)		
	A	B	C		A	B	C
0.8WT-2P	0.8	3.90	1.90	0.8WT-12P	8.80	11.90	9.90
0.8WT-3P	1.6	4.70	2.70	0.8WT-13P	9.60	12.70	10.70
0.8WT-4P	2.4	5.50	3.50	0.8WT-14P	10.40	13.50	11.50
0.8WT-5P	3.2	6.30	4.30	0.8WT-15P	11.20	14.30	12.30
0.8WT-6P	4.0	7.10	5.10	0.8WT-16P	12.00	15.10	13.10
0.8WT-7P	4.8	7.90	5.90				
0.8WT-8P	5.6	8.70	6.70				
0.8WT-9P	6.4	9.50	7.50				
0.8WT-10P	7.2	10.30	8.30				
0.8WT-11P	8.0	11.10	9.10				




THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.
 PDWG.NO: 0013-1

深圳市步步精科技有限公司

NAME: 针座 0.8-6P 卧贴 米黄色
 PJ. NO.: WT.17.61-73-H001
 APPD.: JM_Zheng
 CHKD.: LYX
 DR.: SGF
 FINISH: SEE NOTES
 SCALE: N/A
 REV.: A0
 MAT'L.: SEE NOTES
 UNIT: mm
 PAGE: 1/2

NO	物料名称	规格型号	数量 (PCS)	材质	镀涂
①	底座	0.8	1	LCPE130i	本色
②	焊片	0.8	2	磷铜	锡
③	插针	0.8	2~20	磷铜	锡

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0				

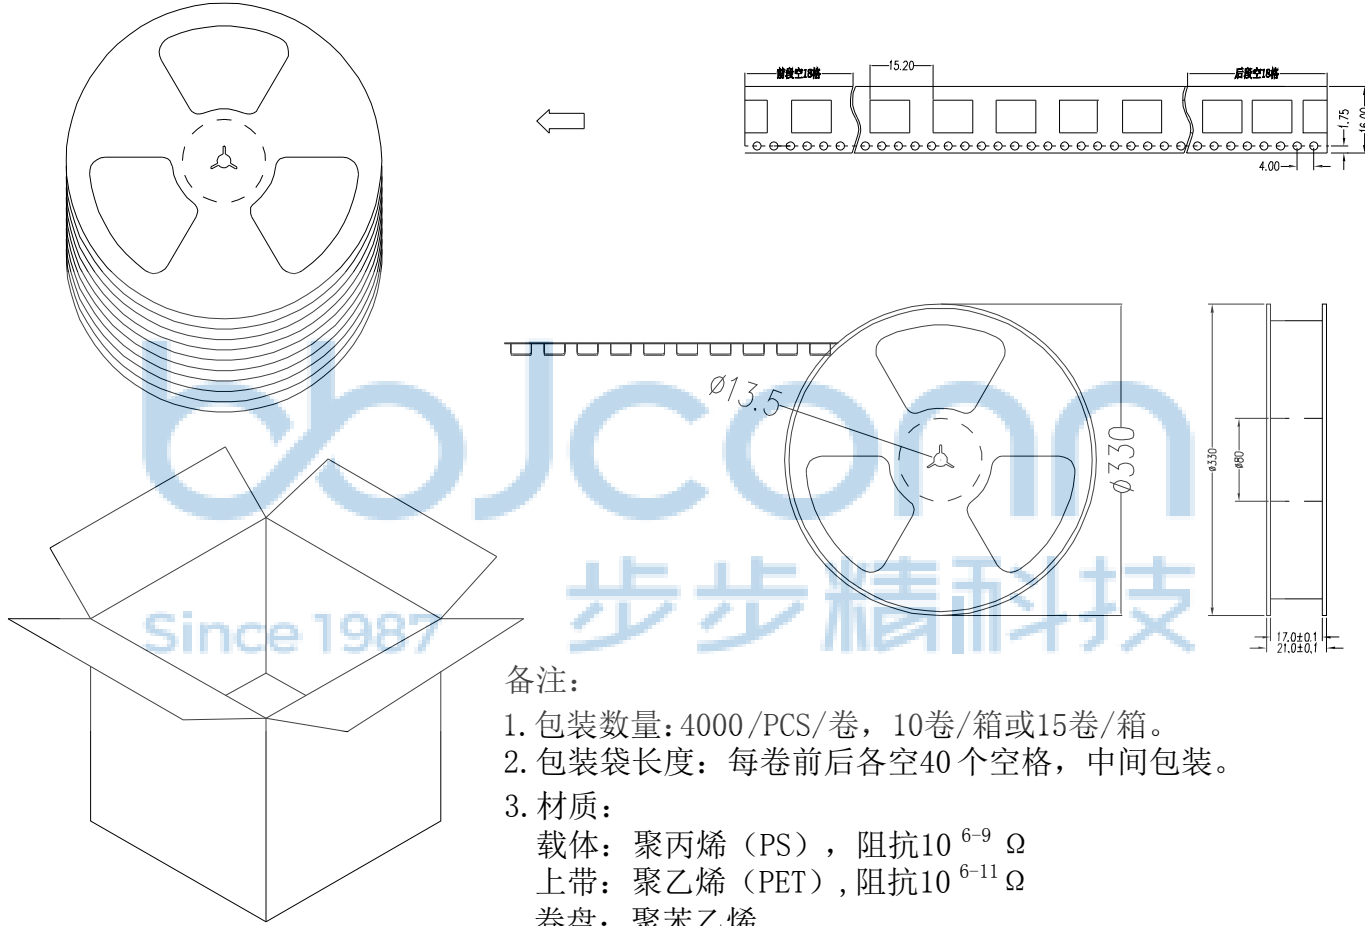

备注:

1. 包装数量: 4000 /PCS/卷, 10卷/箱或15卷/箱。
2. 包装袋长度: 每卷前后各空40个空格, 中间包装。
3. 材质:
载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
卷盘: 聚苯乙烯。

纸箱规格: 345*345*23MM

纸箱规格: 345*345*35MM

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 .X: ±0.38 .X': ±3" .XX: ±0.25 .X': ±2" .XXX: ±0.13 .XX': ±1"		NAME: 针座 0.8-6P 卧贴 米黄色	
APPD.	JM_Zheng	PJ. NO.: WT.17.61-73-H001 SIZE: A4 DRW NO.:		FINISH: SEE NOTES MAT'L.: SEE NOTES	
CHKD.	LYX	SCALE: N/A		REV.: A0	UNIT: mm
PDWG.NO:	0013-1	DR.	SGF	PAGE: 2/2	