

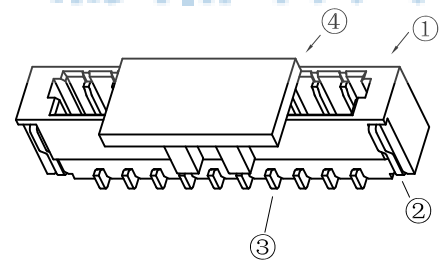
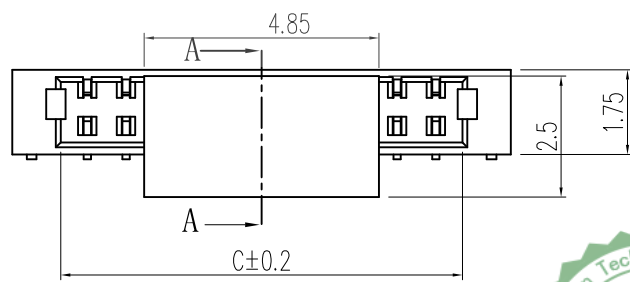
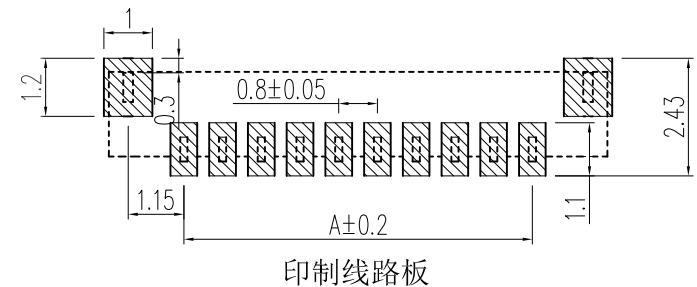

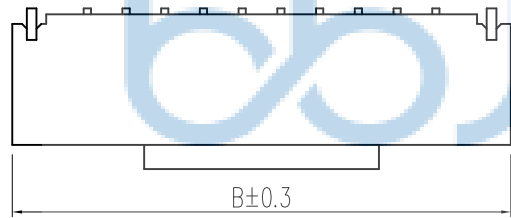


REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0				

1. 技术参数:
- 1.1 额定电流: 0.5A AC/DC
 - 1.2 额定电压: 50V
 - 1.3 耐电压: 500V ACminute
 - 1.4 接触电阻: 20mΩ MAX
 - 1.5 绝缘电阻: 100MΩ MIN
 - 2. 工作温度: -25℃~+85℃



Circuits	Dimensions (mm)			Circuits	Dimensions (mm)		
	A	B	C		A	B	C
0.8LT-2P	0.8	3.90	1.90	0.8LT-12P	8.80	11.90	9.90
0.8LT-3P	1.6	4.70	2.70	0.8LT-13P	9.60	12.70	10.70
0.8LT-4P	2.4	5.50	3.50	0.8LT-14P	10.40	13.50	11.50
0.8LT-5P	3.2	6.30	4.30	0.8LT-15P	11.20	14.30	12.30
0.8LT-6P	4.0	7.10	5.10	0.8LT-16P	12.00	15.10	13.10
0.8LT-7P	4.8	7.90	5.90				
0.8LT-8P	5.6	8.70	6.70				
0.8LT-9P	6.4	9.50	7.50				
0.8LT-10P	7.2	10.30	8.30				
0.8LT-11P	8.0	11.10	9.10				

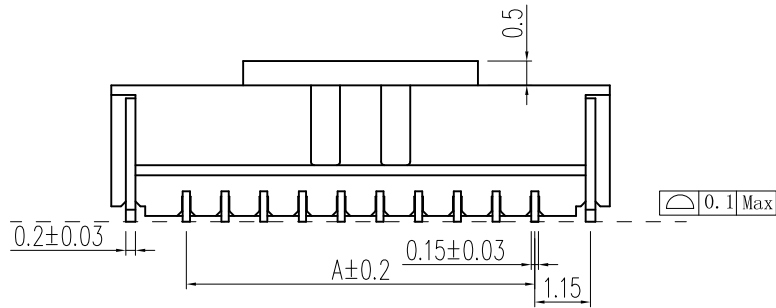

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co., Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.

深圳市步步精科技有限公司

NAME: 针座 0.8-11P 立贴 加盖 米黄色

PJ. NO.: WT.17.61-85-H002

SIZE: A4 DRW NO.:

FINISH: SEE NOTES MAT'L.: SEE NOTES

SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2


APPD. JM_Zheng

CHKD. LYX

DR. SGF

PDWG.NO: 0013-1

NO	物料名称	规格型号	数量(PCS)	材质	镀涂	物料编码
①	底座	0.8	1	LCPE130i	本色	
②	焊片	0.8	2	磷铜	锡	
③	插针	0.8	2~20	磷铜	锡	
④	盖板	0.8	1	LCPE130i	本色	

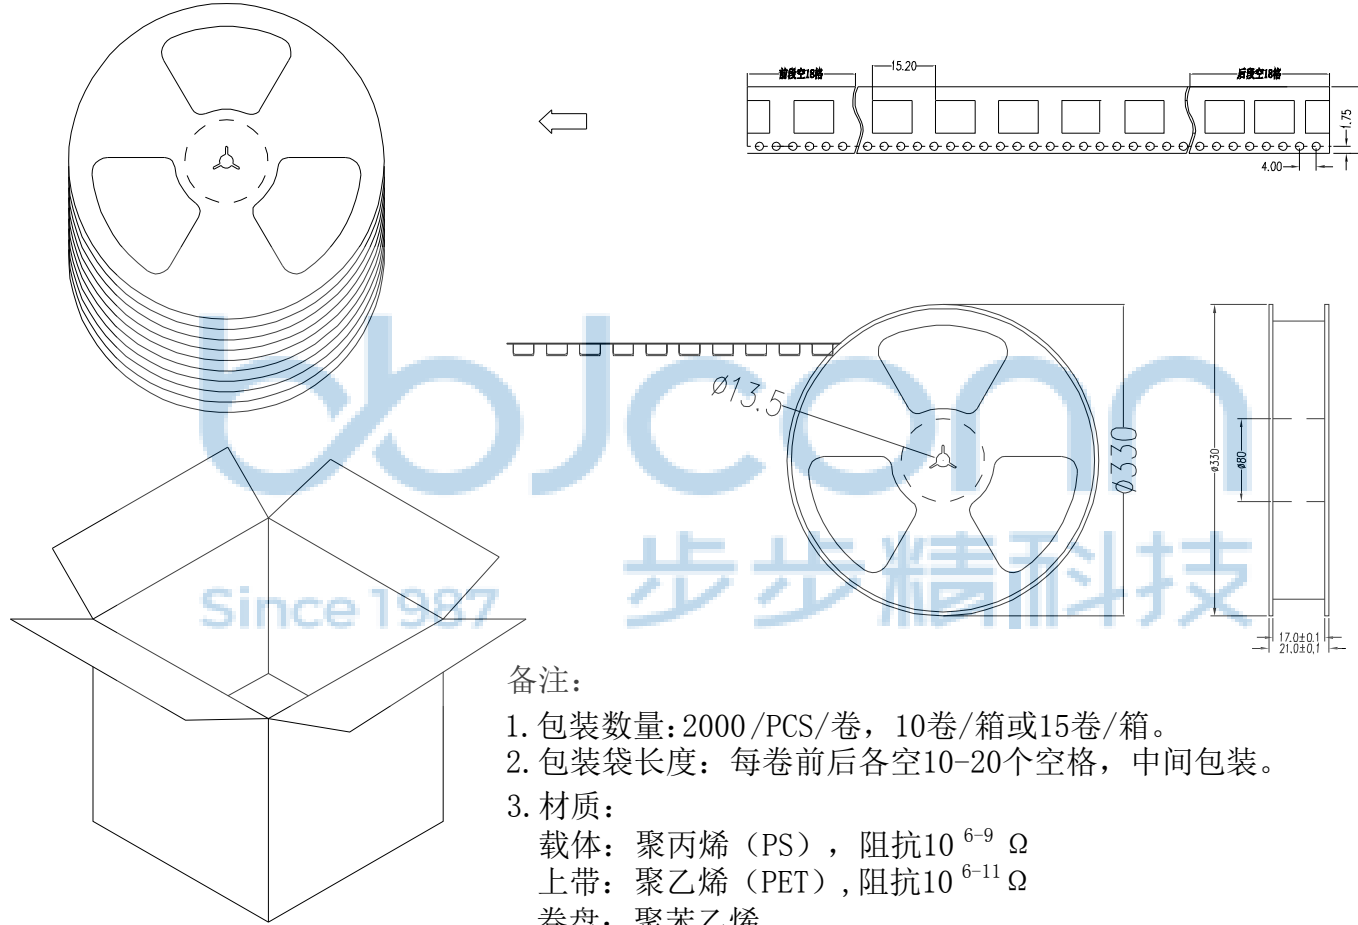

备注:

1. 包装数量: 2000 /PCS/ 卷, 10卷/箱或15卷/箱。
2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
3. 材质:
载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
卷盘: 聚苯乙烯。

纸箱规格: 345*345*23MM
纸箱规格: 345*345*35MM



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
PDWG.NO: 0013-1		DR. SGF	NAME: 针座 0.8-11P 立贴 加盖 米黄色
.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13		.X*: $\pm 3^*$.X*: $\pm 2^*$.XX*: $\pm 1^*$	PJ. NO.: WT.17.61-85-H002
APPD. JM_Zheng		CHKD. LYX	SIZE: A4 DRW NO.:
FINISH: SEE NOTES		MAT'L.: SEE NOTES	
SCALE: N/A		REV.: A0	UNIT: mm
PAGE: 2/2			