

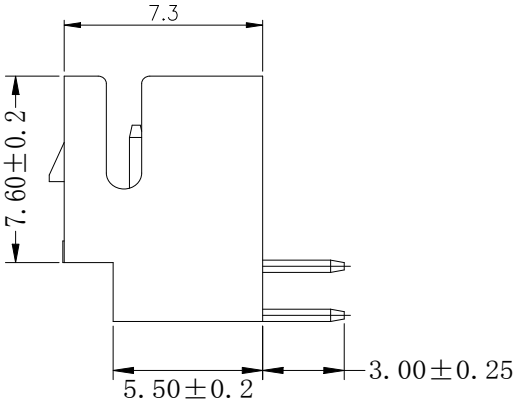
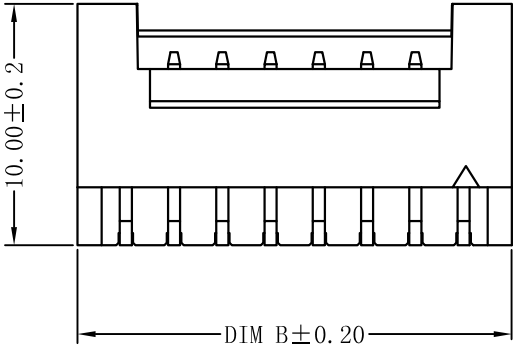
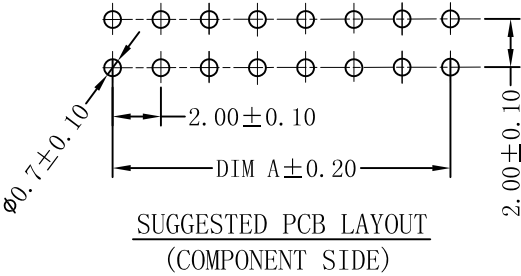


| REV. | ECN NO | CONTENT | DATE | ENGINEER |
|------|--------|---------|------|----------|
| A0   |        |         |      |          |


- 技术要求:
- 1、塑件材料: CM3004 (UL-94V-0)
  - 2、接触件: 黄铜镀锡
  - 3、接触电阻:  $\leq 30\text{m}\Omega$
  - 4、绝缘电阻:  $\geq 1000\text{M}\Omega$
  - 5、额定电压: 250V AC DC
  - 6、额定电流: 3.0A AC DC
  - 7、耐压: 能承受1000V AC/Minute
  - 8、工作温度:  $-25^{\circ}\sim +85^{\circ}$
  - 9、可焊性试验: 浸锡面积 $\geq 95\%$ 温度 $250^{+5}_{-0}$ , 时间  $2.5\pm 0.5$ 秒
  - 10、铅和镉等六大有害物质含量要符合环保要求

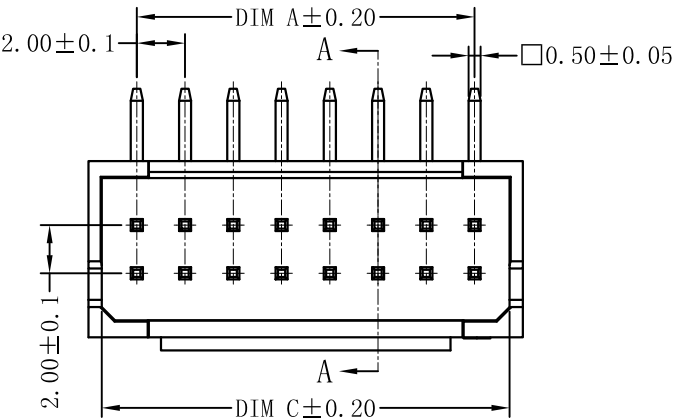

SECTION A-A



| Circuits | Dimensions (mm) |       |       |
|----------|-----------------|-------|-------|
|          | A               | B     | C     |
| 203      | 4.00            | 8.00  | 6.90  |
| 204      | 6.00            | 10.00 | 8.90  |
| 205      | 8.00            | 12.00 | 10.90 |
| 206      | 10.00           | 14.00 | 12.90 |
| 207      | 12.00           | 16.00 | 14.90 |
| 208      | 14.00           | 18.00 | 16.90 |
| 209      | 16.00           | 20.00 | 18.90 |
| 210      | 18.00           | 22.00 | 20.90 |
| 211      | 20.00           | 24.00 | 22.90 |
| 212      | 22.00           | 26.00 | 24.90 |
| 213      | 24.00           | 28.00 | 26.90 |
| 214      | 26.00           | 30.00 | 28.90 |
| 215      | 28.00           | 32.00 | 30.90 |

|    |            |               |     |                                     |
|----|------------|---------------|-----|-------------------------------------|
| 2  | 端子 Contact | 黄铜            | n*2 | 电镀(锡): 整个表面镀底锡30u"MIN, 再镀锡 80u"MIN. |
| 1  | 基座 Wafer   | LCP (UL94V-0) | 1   | 米色                                  |
| 序号 | 名称         | 材料            | 数量  | 附注                                  |

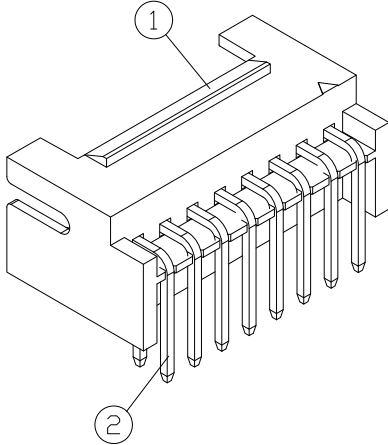

|                                                                                                                                                                              |          |                                                                                           |     |                                                         |                             |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|-------------------------------------------------------------------------------------------|-----|---------------------------------------------------------|-----------------------------|
| THIS DOCUMENT IS THE<br>SOLE PROPERTY OF<br>BBJconn Technology Co.,Ltd.<br>Corporation AND SHOULD<br>NOT BE USED IN WHOLE<br>OR IN PART WITHOUT<br>PRIOR WRITTEN PERMISSION. |          | .X: $\pm 0.38$ .XX: $\pm 0.25$ .XXX: $\pm 0.13$ X*: $\pm 3'$ .X*: $\pm 2'$ .XX*: $\pm 1'$ |     | NAME:<br>Öëxù PHB-2x4AW (2.0-2x4P) È«ÅÄäÖë 'ø¿Û Äx»/ÆÉ« |                             |
| APPD.                                                                                                                                                                        | JM_Zheng | PJ. NO.: WT.15.63-21-M001                                                                 |     | SIZE: A4 DRW NO.:                                       |                             |
| CHKD.                                                                                                                                                                        | LYX      | FINISH: SEE NOTES                                                                         |     | MAT'L.: SEE NOTES                                       |                             |
| PDWG.NO:                                                                                                                                                                     | 0510-1   | DR.                                                                                       | SGF | SCALE: N/A                                              | REV.: A0 UNIT: mm PAGE: 1/2 |

PE袋规格:\*\*\*X\*\*\* (以实际出货为准)

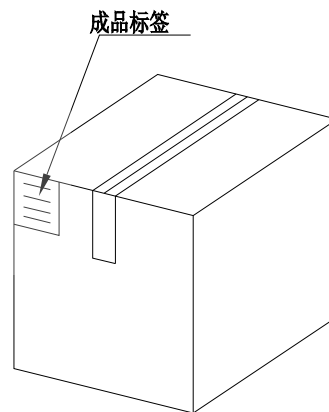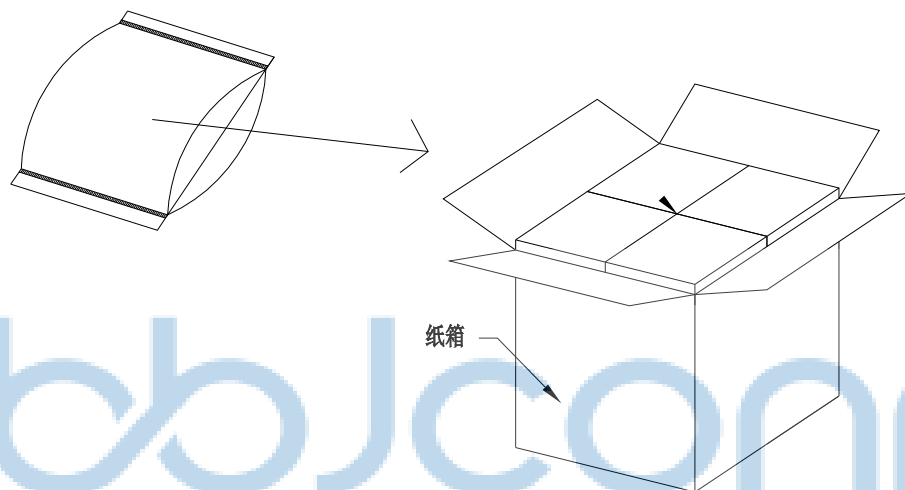

## 1. 包装要求:

- 1.1 每PE袋包装1000 pcs;
- 1.2 每1袋放一小纸盒;
- 1.3 每20个小纸盒放一个纸箱, 共计20000PCS
- 1.4 纸箱外贴上标签



|                                                                                                                                                            |          |                                           |  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|-------------------------------------------|--|
| THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. |          | 深圳市步步精科技有限公司                              |  |
| .X: ±0.38<br>.XX: ±0.25<br>.XXX: ±0.13                                                                                                                     |          | X*: ±3"<br>.X*: ±2"<br>.XX*: ±1"          |  |
| APPD.                                                                                                                                                      | JM_Zheng | NAME: 针座 PHB-2x4AW (2.0-2x4P) 双排弯针 带扣 米黄色 |  |
| CHKD.                                                                                                                                                      | LYX      | PJ. NO.: WT.15.63-21-M001                 |  |
| DR.                                                                                                                                                        | SGF      | SIZE: A4 DRW NO.:                         |  |
| PDWG.NO: 0510-1                                                                                                                                            |          | FINISH: SEE NOTES MAT'L.: SEE NOTES       |  |
|                                                                                                                                                            |          | SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2    |  |