
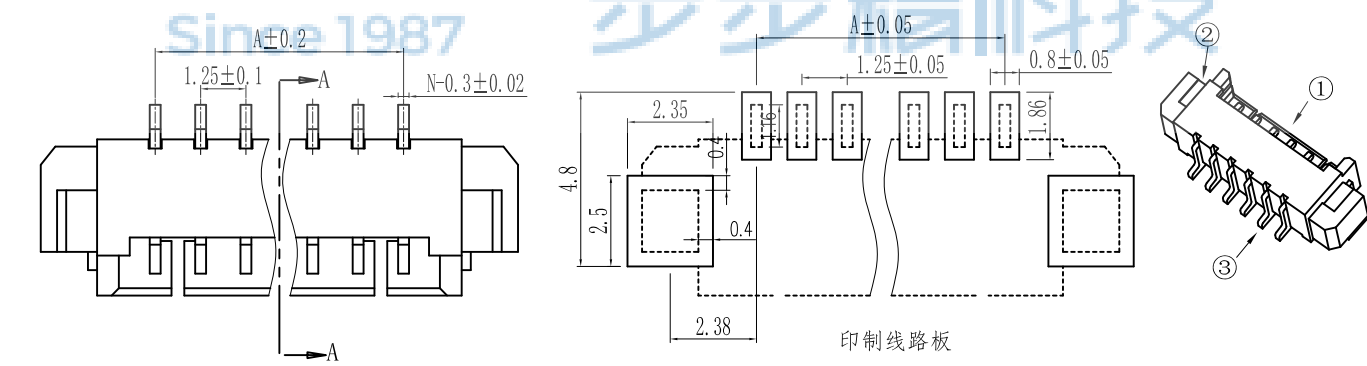
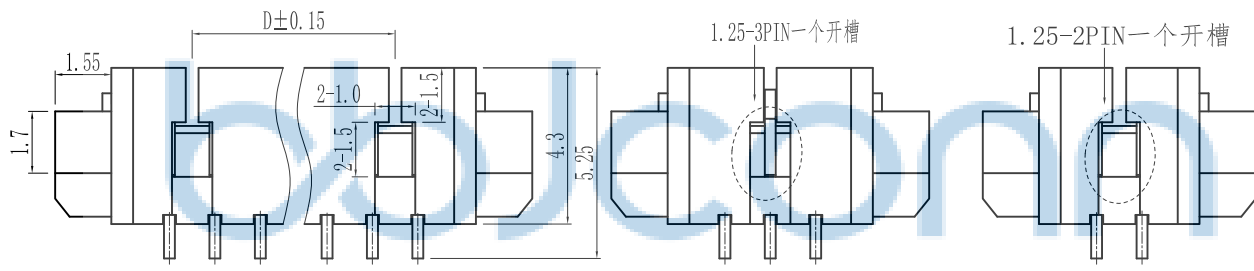


REV.	ECN NO	CONTENT	DATE	ENGINEER
A0				

1. 技术参数:  
 1.1 额定电流: 1.0A AC/DC  
 1.2 额定电压: 125V  
 1.3 耐电压: 500V ACminute  
 1.4 接触电阻: 20mΩ MAX  
 1.5 绝缘电阻: 500MΩ MIN  
 2. 工作温度: -25°C ~ +85°C

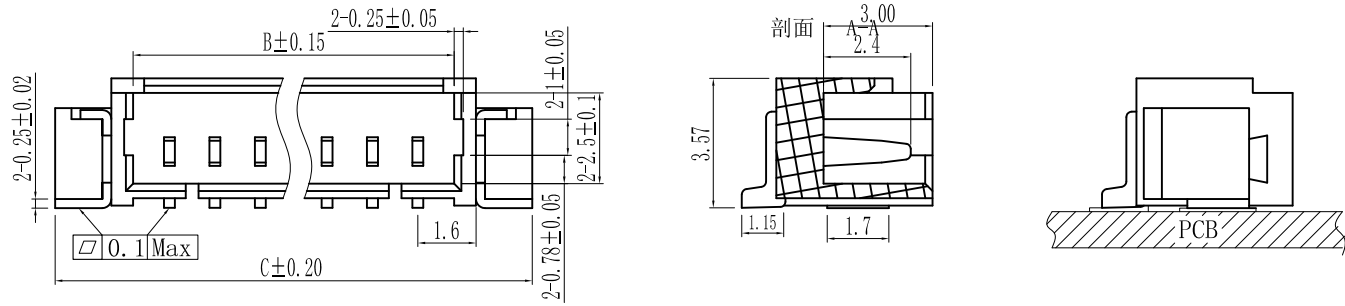

Circuits	Dimensions (mm)			
	A	B	C	D
2PIN	1.25	3.10	7.50	/
3PIN	2.50	4.35	8.80	/
4PIN	3.75	5.60	10.00	2.50
5PIN	5.00	6.85	11.30	3.75
6PIN	6.25	8.10	12.60	5.00
7PIN	7.50	9.35	13.80	6.25
8PIN	8.75	10.60	15.00	7.50
9PIN	10.00	11.85	16.30	8.75
10PIN	11.25	13.10	17.60	10.00
11IN	12.50	14.35	18.80	11.25
12PIN	13.75	15.60	20.10	12.50
13PIN	15.00	16.85	21.30	13.75
14PIN	16.25	18.10	22.55	15.00
15PIN	17.50	19.35	23.80	16.25
16PIN	18.75	20.60	25.05	17.50

NO	物料名称	数量 (PCS)	材质	镀涂
①	塑胶件	1 PCS	LCP	本色
②	焊片	2 PCS	黄铜	亮锡
③	PIN针	2~16 PCS	黄铜	亮锡



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.

PDWG.NO: 0050-2

APPD. JM\_Zheng  
CHKD. LYX  
DR. SGF

**深圳市步步精科技有限公司**  
NAME: 针座 1.25-8P 卧贴 米黄色  
PJ. NO.: WT.04.61-73-M007  
SIZE: A4 DRW NO.:  
FINISH: SEE NOTES MAT'L.: SEE NOTES  
SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2

