

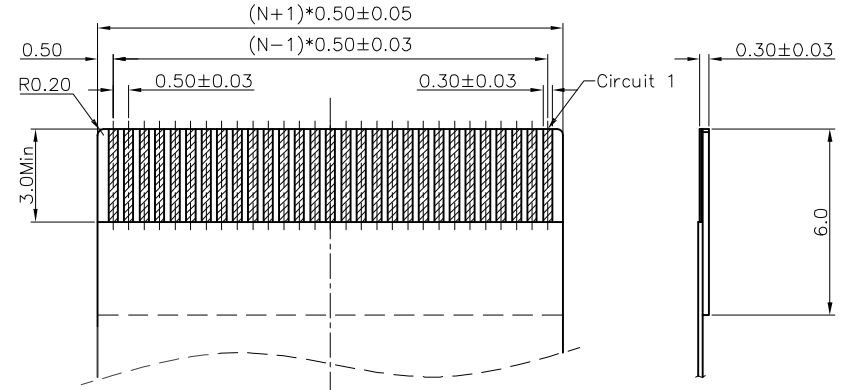

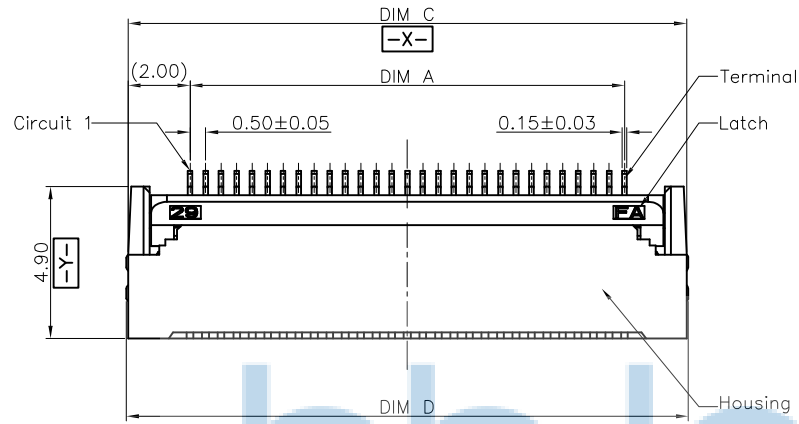




RECOMMENDED FPC/FFC DIMENSION

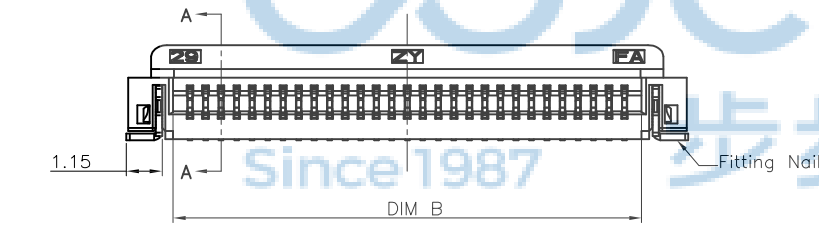

Note:





- Material:
 - Housing: thermoplastic high temp.UL94V-0; Color: natural.
 - Latch: thermoplastic high temp.UL94V-0; Color: black.
 - Terminal: copper alloy.
 - Fitting Nail: copper alloy.
- Finish:
 - Terminal:
 - Underplating: Au/matt Tin overall.
 - Fitting Nail:
 - Underplating: matt Tin overall.
- Product must comply HF RoHS specification.

CKTS	DIM A	DIM B	DIM C	DIM D
4	1.50	2.60	3.50	3.60
5	2.00	3.10	4.00	4.10
6	2.50	3.60	4.50	4.60
7	3.00	4.10	5.00	5.10
8	3.50	4.60	5.50	5.60
9	4.00	5.10	6.00	6.10
10	4.50	5.60	6.50	6.60
11	5.00	6.10	7.00	7.10
12	5.50	6.60	7.50	7.60
13	6.00	7.10	8.00	8.10
14	6.50	7.60	8.50	8.60
15	7.00	8.10	9.00	9.10
16	7.50	8.60	9.50	9.60
17	8.00	9.10	10.00	10.10
18	8.50	9.60	10.50	10.60
19	9.00	10.10	11.00	11.10
20	9.50	10.60	11.50	11.60
21	10.00	11.10	12.00	12.10
22	10.50	11.60	12.50	12.60
23	11.00	12.10	13.00	13.10
24	11.50	12.60	13.50	13.60
25	12.00	13.10	14.00	14.10
26	12.50	13.60	14.50	14.60
27	13.00	14.10	15.00	15.10
28	13.50	14.60	15.50	15.60
29	14.00	15.10	16.00	16.10
30	14.50	15.60	16.50	16.60
31	15.00	16.10	17.00	17.10
32	15.50	16.60	17.50	17.60
33	16.00	17.10	18.00	18.10
34	16.50	17.60	18.50	18.60
35	17.00	18.10	19.00	19.10
36	17.50	18.60	19.50	19.60
37	18.00	19.10	20.00	20.10
38	18.50	19.60	20.50	20.60
39	19.00	20.10	21.00	21.10
40	19.50	20.60	21.50	21.60
41	20.00	21.10	22.00	22.10
42	20.50	21.60	22.50	22.60
43	21.00	22.10	23.00	23.10
44	21.50	22.60	23.50	23.60
45	22.00	23.10	24.00	24.10
46	22.50	23.60	24.50	24.60
47	23.00	24.10	25.00	25.10
48	23.50	24.60	25.50	25.60
49	24.00	25.10	26.00	26.10
50	24.50	25.60	26.50	26.60
51	25.00	26.10	27.00	27.10
52	25.50	26.60	27.50	27.60
53	26.00	27.10	28.00	28.10
54	26.50	27.60	28.50	28.60
55	27.00	28.10	29.00	29.10
56	27.50	28.60	29.50	29.60
57	28.00	29.10	30.00	30.10
58	28.50	29.60	30.50	30.60
59	29.00	30.10	31.00	31.10
60	29.50	30.60	31.50	31.60



THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0407-1

深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X*: ±3° X*: ±2° XX*: ±1°
NAME:	FPC 0.5-40P 后翻式H2.0
APPD. JM_Zheng	PJ. NO.: PC.02.05-32-C002
CHKD. LYX	SIZE: A4 DRW NO.:
DR. SGF	FINISH: SEE NOTES MAT'L: SEE NOTES
SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2	

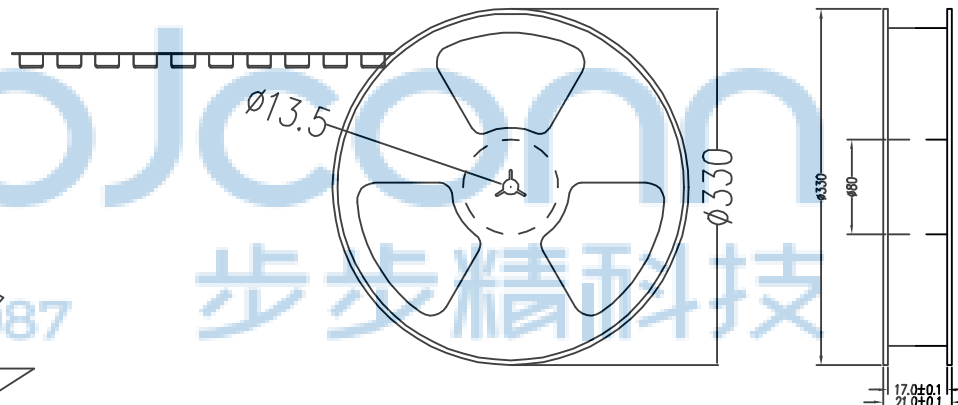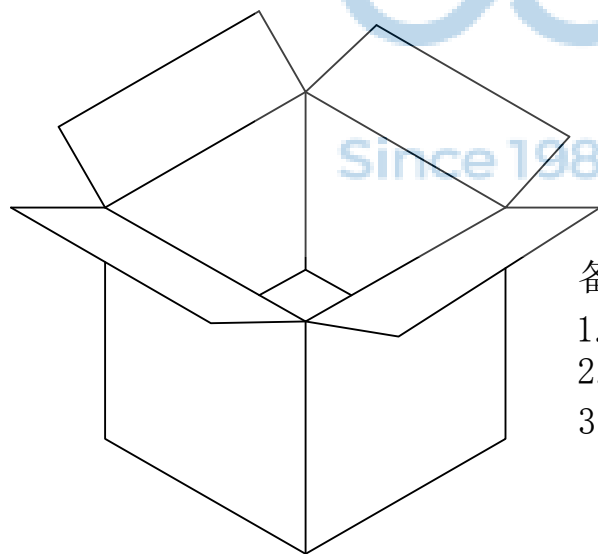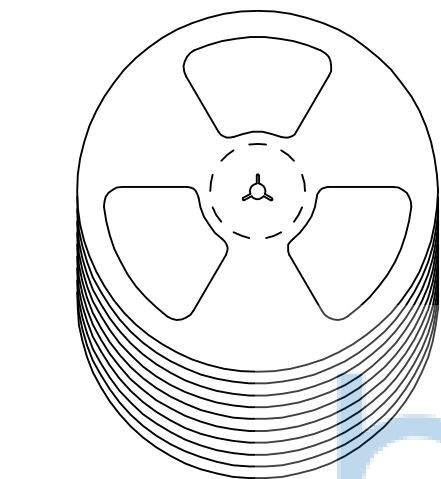

备注:

1. 包装数量: 1500/PCS/卷, 10卷/箱。
2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
3. 材质:
载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
卷盘: 聚苯乙烯。

纸箱规格: 345*345*23MM

纸箱规格: 345*345*35MM

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13		NAME: FPC 0.5-40P 后翻式H2.0	
APPD. JM_Zheng		PJ. NO.: PC.02.05-32-C002	
CHKD. LYX		SIZE: A4 DRW NO.:	
PDWG.NO: 0407-1		FINISH: SEE NOTES MAT'L.: SEE NOTES	
DR. SGF		SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	