











REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0				

技术指标 (Technical Index):


1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象。
(The surface of the plastic parts should be smooth, no rough edges, no obvious shrinkage, defects, cracks and other phenomena.)
2. 温度范围 (Temperature range): $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$.
3. 额定电压 (Rated voltage): 50V, AC/DC (=等效).
4. 接触电阻 (Contact resistance): $\leq 0.03\Omega$.
5. 绝缘电阻 (Insulation resistance): $\geq 500M\Omega$.

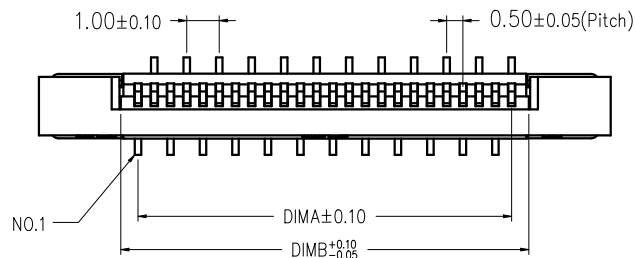

With cover (6--34Pin)

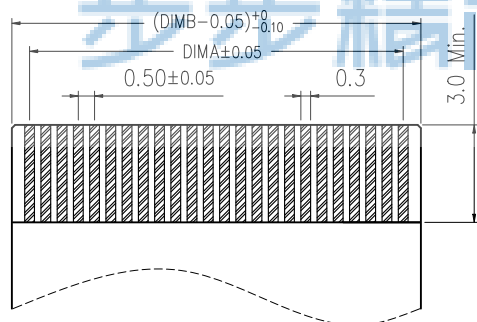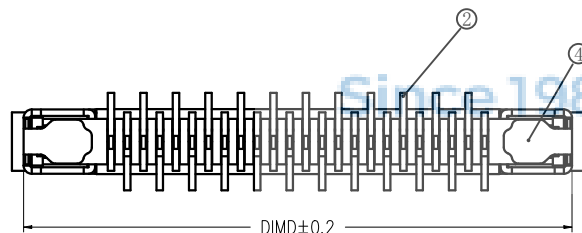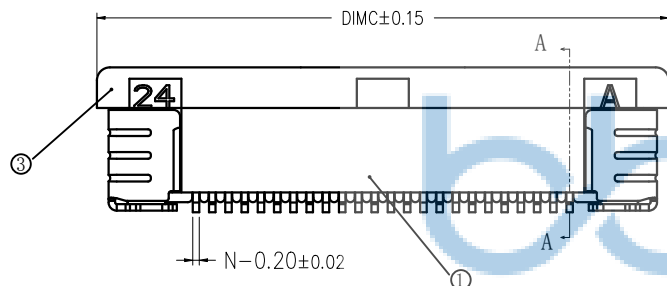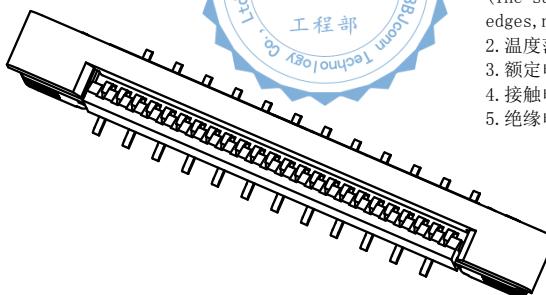

适用扁平线 (Applicable Flat Cable)

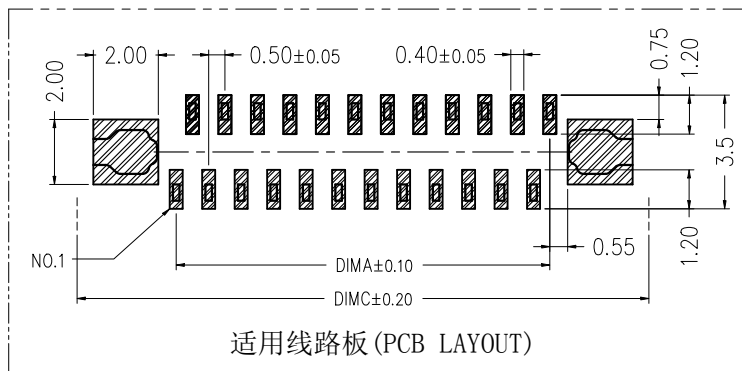

适用线路板 (PCB LAYOUT)




CKT	DIM A	DIM B	DIM C	DIM D	DIM E
4	1.50	2.56	7.60	6.88	
5	2.00	3.06	8.10	7.38	
6	2.50	3.56	8.60	7.88	
7	3.00	4.06	9.10	8.38	
8	3.50	4.56	9.60	8.88	
9	4.00	5.06	10.10	9.38	
10	4.50	5.56	10.60	9.88	
11	5.00	6.06	11.10	10.38	
12	5.50	6.56	11.60	10.88	
13	6.00	7.06	12.10	11.38	
14	6.50	7.56	12.60	11.88	
15	7.00	8.06	13.10	12.38	
16	7.50	8.56	13.60	12.88	
17	8.00	9.06	14.10	13.38	
18	8.50	9.56	14.60	13.88	
19	9.00	10.06	15.10	14.38	4.45
20	9.50	10.56	15.60	14.88	
21	10.00	11.06	16.10	15.38	
22	10.50	11.56	16.60	15.88	
23	11.00	12.06	17.10	16.38	
24	11.50	12.56	17.60	16.88	
25	12.00	13.06	18.10	17.38	
26	12.50	13.56	18.60	17.88	
27	13.00	14.06	19.10	18.38	
28	13.50	14.56	19.60	18.88	
29	14.00	15.06	20.10	19.38	
30	14.50	15.56	20.60	19.88	
31	15.00	16.06	21.10	20.38	
32	15.50	16.56	21.60	20.88	
33	16.00	17.06	22.10	21.38	
34	16.50	17.56	22.60	21.88	

序号	品名	材质
①	0.5 拉拔3代散芯 0.5 Pitch ZIF Type 3 Housing	LCP UL94V-0 本色 Natural
②	0.5 拉拔立式3代端子 0.5 Pitch ZIF S/T Type 3 terminal	铜合金/表面镀锡 Copper Alloy/ Tin Plating
③	0.5 拉拔3代后盖 0.5 Pitch ZIF Type 3 Actuator	LCP UL94V-0 黑色 Black
④	0.5 拉拔3代焊片 0.5 Pitch ZIF Type 3 Fitting Nail	铜合金/表面镀锡 Copper Alloy/ Tin Plating



深圳市步步精科技有限公司

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		NAME: FPC 0.5-4P 正位立贴 H=4.45 贴膜编带	
APPD.	JM_Zheng	P.J. NO.: PC.02.03-32-F008	
CHKD.	LYX	SIZE: A4 DRW NO.:	
DR.	TSP	FINISH: SEE NOTES MAT'L.: SEE NOTES	
PDWG. NO: 0456-1		SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2	

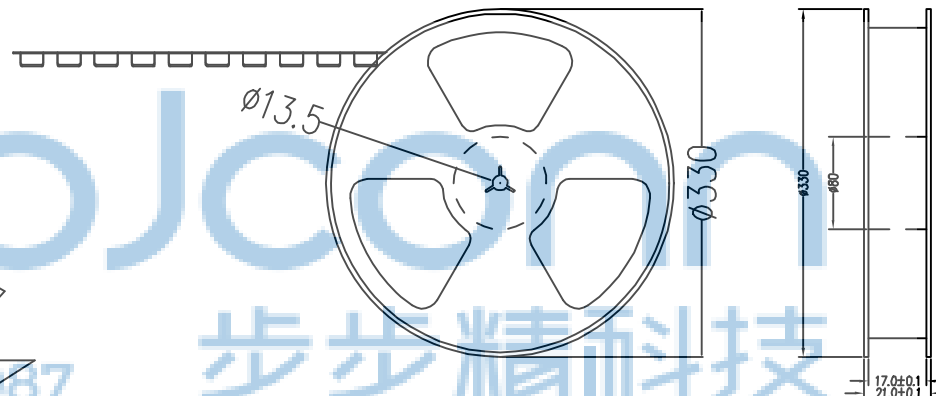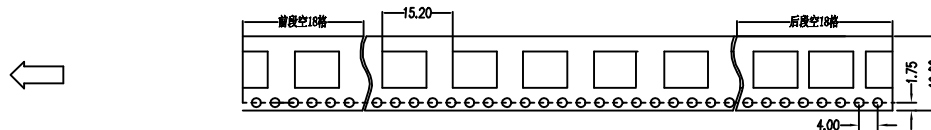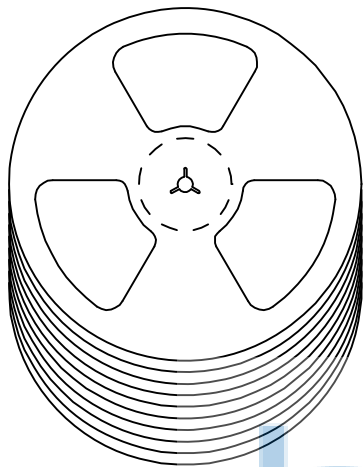

备注:

- 包装数量: 1500/PCS/卷, 10卷/箱。
- 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
- 材质:
 - 载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
 - 上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
 - 卷盘: 聚苯乙烯。

纸箱规格: 345*345*23MM

纸箱规格: 345*345*35MM

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13		NAME: FPC 0.5-4P 正位立贴 H=4.45 贴膜编带	
.X': $\pm 3'$.X': $\pm 2'$.XX': $\pm 1'$		P.J. NO.: PC.02.03-32-F008	
APPD. JM_Zheng		SIZE: A4 DRW NO.:	
CHKD. TSP		FINISH: SEE NOTES MAT'L.: SEE NOTES	
PDWG.NO: 0456-1		SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	