

说明:

1. 材质:

胶芯: LCP, UL94V-0; COLOR: BLACK

端子: C2680

外壳: SPCC

2. 电镀说明:

端子: 接触区域镀金

焊锡区域镀雾锡 100 u" Min

全部区域镍底 50 u" Min

外壳: 表面镀镍 100 u" Min








3. 电气性能:

绝缘阻抗 (EIA-364-21): 100 MΩ MIN.

AT 500V/DC FOR 1 MINUTE.

接触阻抗 (EIA-364-06) 30 mΩ MAX.


耐电压 (EIA-364-20) NO DISCHARGE,
FLASHOVER OR BREAKDOWN
AT 500 V/AC 1MINUTE.

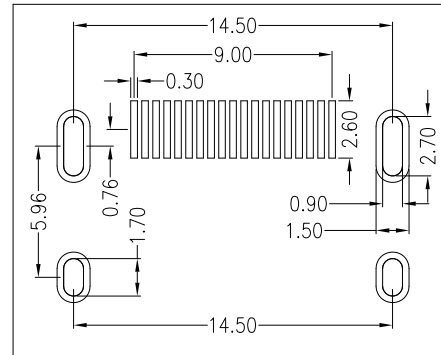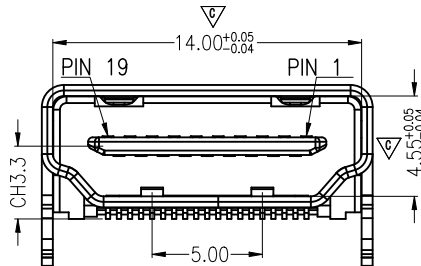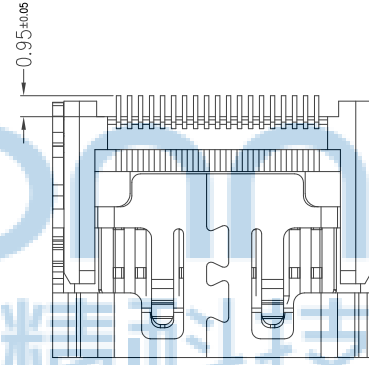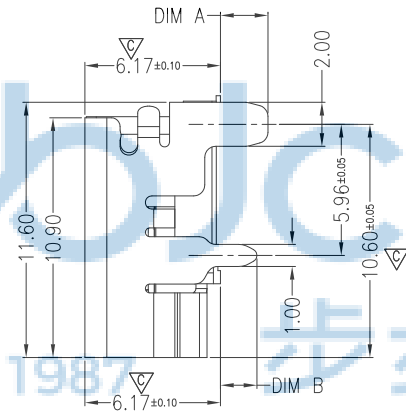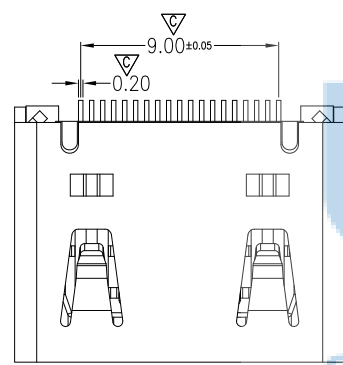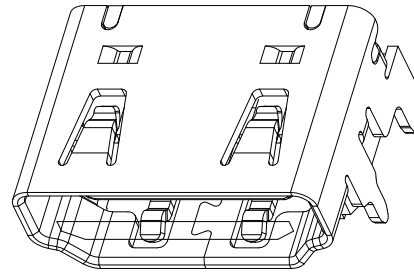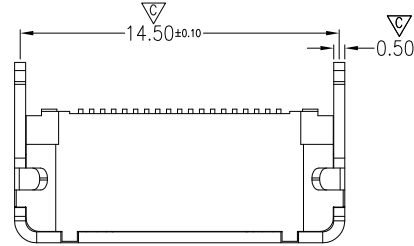

RECOMMENDED P.C.B HOLE LAYOUT
COMPONENT SIDE VIEW (TOLERANCE: +/-0.05)



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		 深圳市步步精科技有限公司		NAME: HDMI A型 母座 平口 铁壳 L=11.60 (接触区域镀金5u, 焊盘区域镀金G-F)	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X': ±3" .X': ±2" .XX': ±1"		PJ. NO.: HD.01.51-14-1001	
APPD. JM_Zheng		CHKD. LYX		SIZE: A4 DRW NO.:	
DR. SGF		PDWG.NO: 0100-2		FINISH: SEE NOTES MAT'L.: SEE NOTES	
				SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/3	

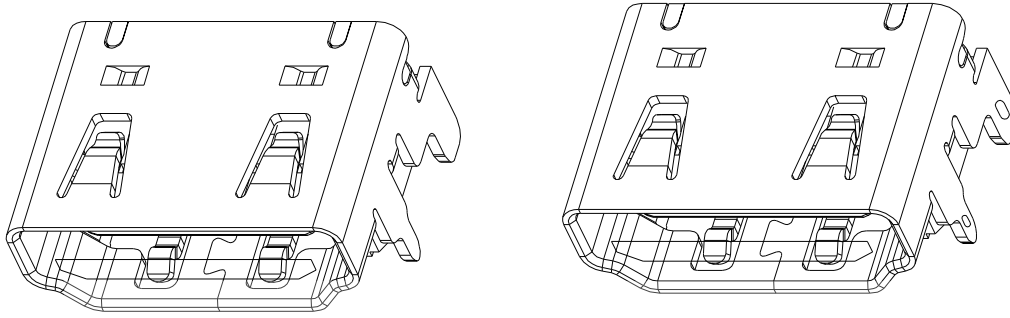

脚无凸点

脚有凸点

4.P/N:

外壳脚规格:



规格	DIM A	DIM B	外壳脚凸点
1	2.16	1.66	无凸点
2	2.16	1.66	带凸点
3	1.50	1.50	无凸点
4	2.20	2.20	无凸点
5	1.50	1.50	带凸点

PIN	Signal Assignment
1	TMDS Data2+
3	TMDS Data2-
5	TMDS Data1 Shield
7	TMDS Data0+
9	TMDS Data0-
11	TMDS Clock Shield
13	CEC
15	SCL
17	DDC/CEC Ground
19	Hot Plug Detect

PIN	Signal Assignment
2	TMDS Data2 Shield
4	TMDS Data1+
6	TMDS Data1-
8	TMDS Data0 Shield
10	TMDS Clock+
12	TMDS Clock-
14	Utility
16	SDA
18	+5V Power




THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
PDWG.NO: 0100-2		NAME: HDMI A型 母座 平口 铁壳 L=11.60 (接触区域镀金5u,焊盘区域镀金6-F)	
APPD.	JM_Zheng	PJ. NO.: HD.01.51-14-1001	
CHKD.	LYX	SIZE: A4 DRW NO.:	
DR.	SGF	FINISH: SEE NOTES	MAT'L.: SEE NOTES
		SCALE: N/A	REV.: A0 UNIT: mm PAGE: 2/3

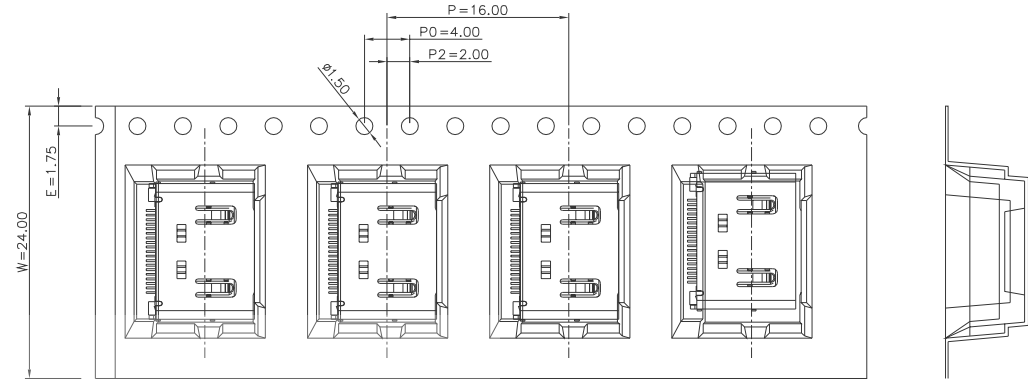
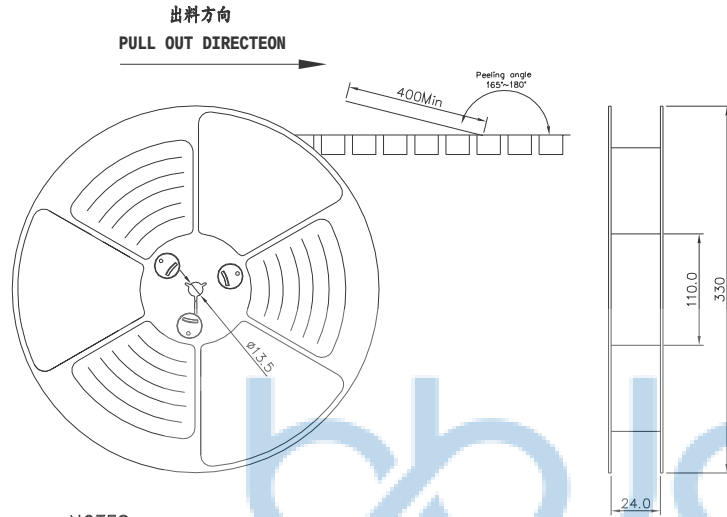


NOTES

1. 帶子引導長度
LEAD TAPE LENGTH
出料方向
PULL OUT DIRECTEON

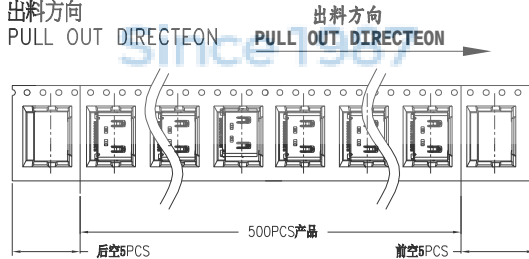

2. 出貨運輸過程中一定注意：
THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT：
卷帶在運輸過程中不能散開
PEELING OFF SHOULD NOT BE ALLOWED DURING TRANSPORTATION

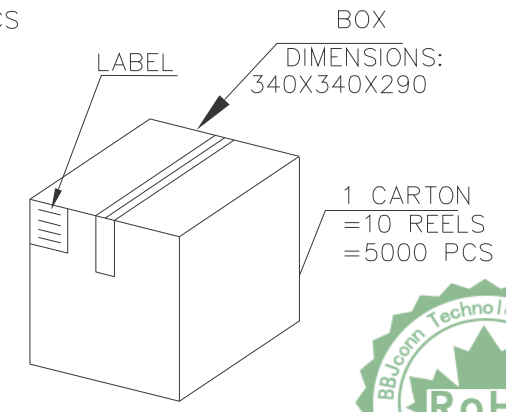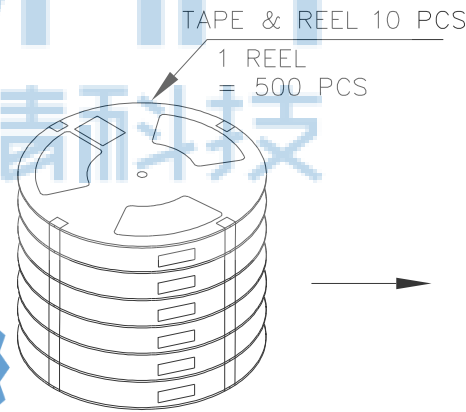

包装明细表 (The detail of the packing) Carton

产品料号 (Product No.)	包装容量 (Packing Capacity)		重量 Weight (Kg)			
	pcs/box	boxs/Carton	Pcs/Box	N.W./Pcs	N.W./Box	G.W./Box
	500	10	5000	----	----	----

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.				深圳市步步精科技有限公司			
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3" .X*: ±2" .XX*: ±1"		NAME: HDMI A型 母座 平口 铁壳 L=11.60 (接触区域镀金5u, 焊盘区域镀金6-F)			
APPD. JM_Zheng		CHKD. LYX		PJ. NO.: HD.01.51-14-1001			
PDWG.NO: 0100-2		DR. SGF		SIZE: A4 DRW NO.:			
				FINISH: SEE NOTES MAT'L.: SEE NOTES			
				SCALE: N/A REV.: A0 UNIT: mm PAGE: 3/3			