

NOTE :

1. SPECIFICATION:

- 1.1. CURRENT RATING: 0.5 Amp Max.
- 1.2. VOLTAGE RATING: 40 V ac(r.m.s) Max.
- 1.3. CONTACT RESISTANCE: 10m ohms Max.mated
- 1.4. INSULATION RESISTANCE: 100M ohms Min.
- 1.5. DIELECTRIC WITHSTANDING VOLTAGE:
AC 500V Min. (for 1 minute)

1.6. OPERATION TEMPERATURE RANGE: -25°C~85°C

2. MECHANICAL



- 2.1 INSERTION FORCE: 4.5KGF MAXMUM
- 2.1 WITHDRAWAL FORCE: 1.0KGF MINIMUM; 4.0KGF MAXMUM






SHELL	H65-H SPCC	1	GOLD PLATED OVER G/F, PLATED OVER 50u" NI min.
9Pin CONTACT	C5191	9	CONTACT AREA: GOLD PLATED OVER 50u" NI min. SOLDED AREA: 100u" MIST TIN PLATED OVER 50u" NI min.
10Pin CONTACT	C5191	10	CONTACT AREA: GOLD PLATED OVER 50u" NI min. SOLDED AREA: 100u" MIST TIN PLATED OVER 50u" NI min.
BACK INSERT HOUSING	LCP	1	BLACK, UL 94V-0
HOUSING	LCP	1	BLACK, UL 94V-0
PART NAME	Mechanical	QT'Y	NOTE

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co., Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG. NO: 0301-1

深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X*: ±3" X*: ±2" XX*: ±1"
NAME:	HDMI A TYPE 180度 H=12.50 公头 夹板 1.2 铁壳 镀镍 无筋 (A版)
APPD. JM_Zheng	PJ. NO.: HD.04.61-14-B001
CHKD. LYX	SIZE: A4 DRW NO.:
DR. SGF	FINISH: SEE NOTES MAT'L.: SEE NOTES
	SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2

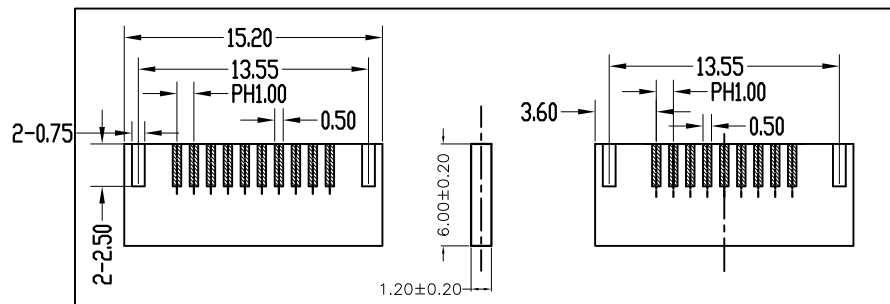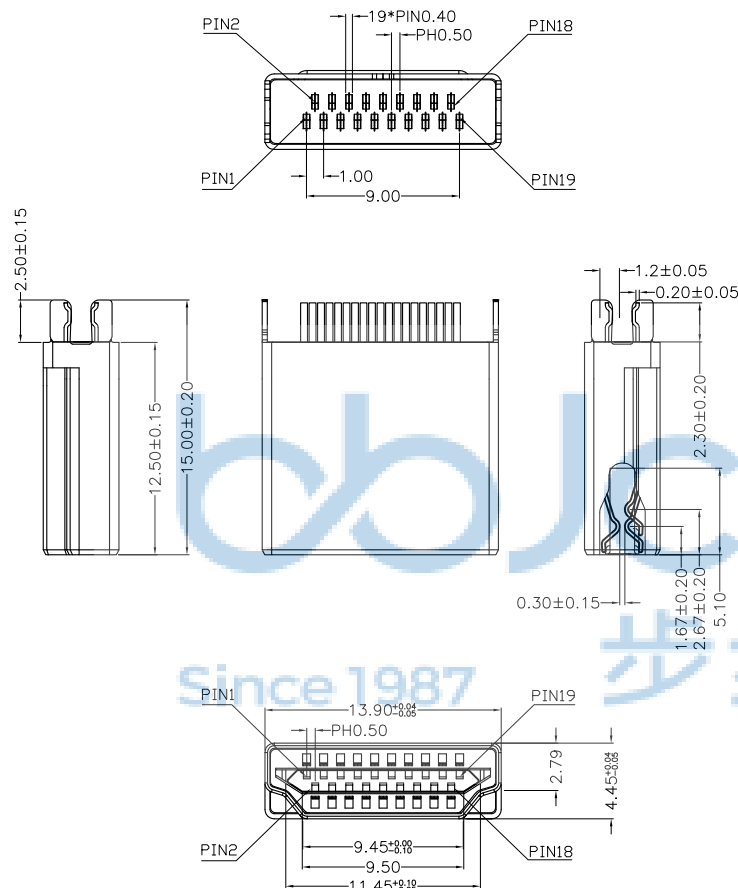

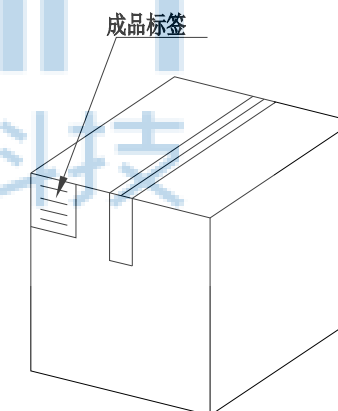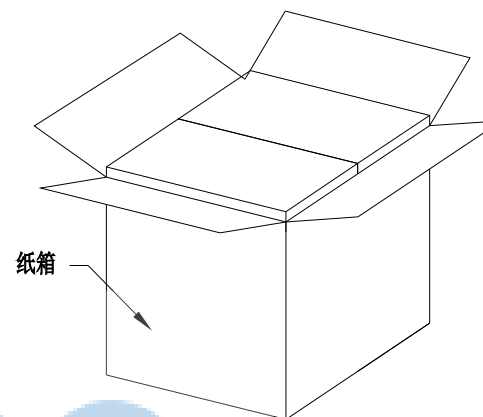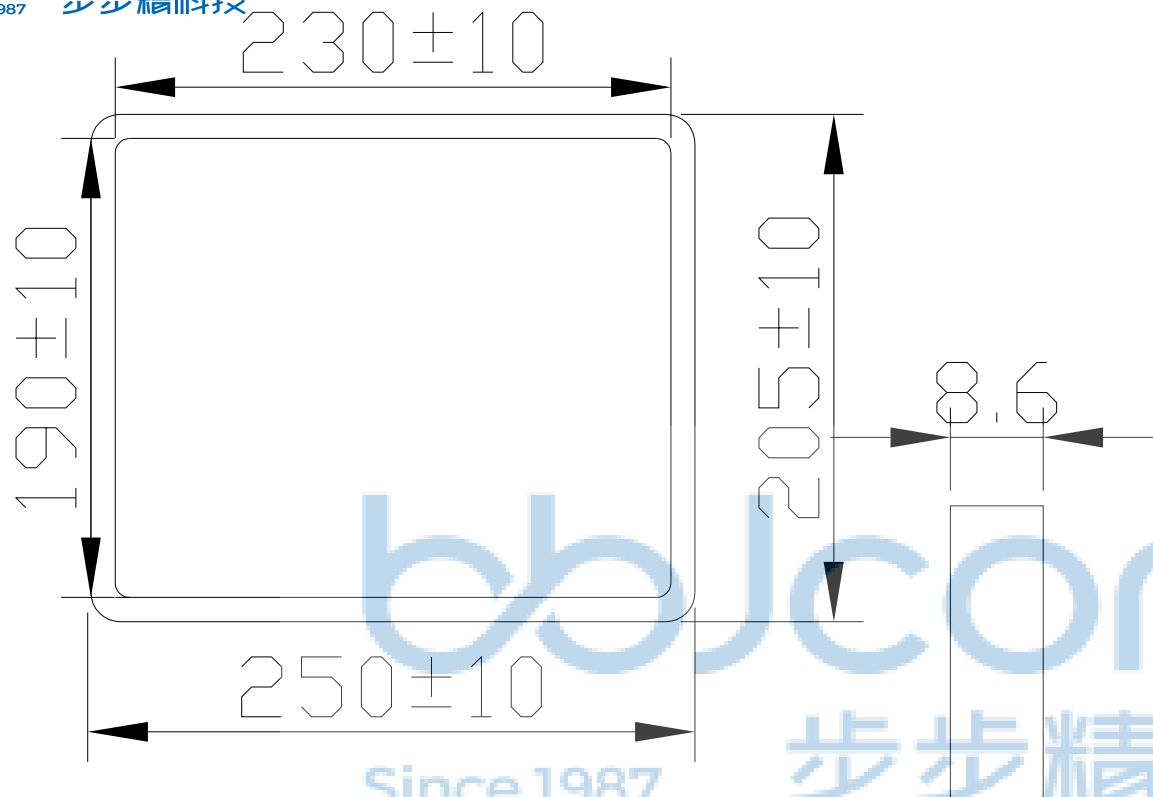

纸箱规格: 350*210*290

1. 包装要求:

- 1.1 每盒吸塑盒包装**100pcs**;
- 1.2 每**20**盘放一箱, 共计**2000PCS**;
- 1.3 纸箱外贴上标签



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
PDWG.NO: 0301-1		NAME: HDMI A TYPE 180度 H=12.50 公头 夹板1.2 铁壳 镀镍 无筋 (A版)	
APPD.	JM_Zheng	PJ. NO.: HD.04.61-14-B001	
CHKD.	LYX	SIZE: A4 DRW NO.:	
DR.	SGF	FINISH: SEE NOTES	MAT'L.: SEE NOTES
		SCALE: N/A	REV.: A0 UNIT: mm PAGE: 2/2