
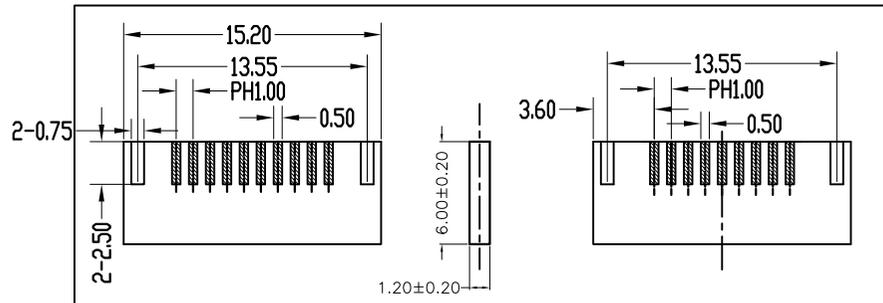
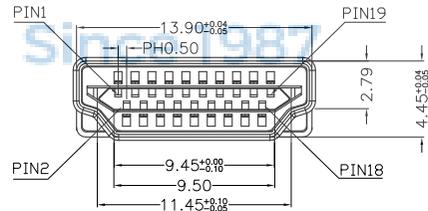
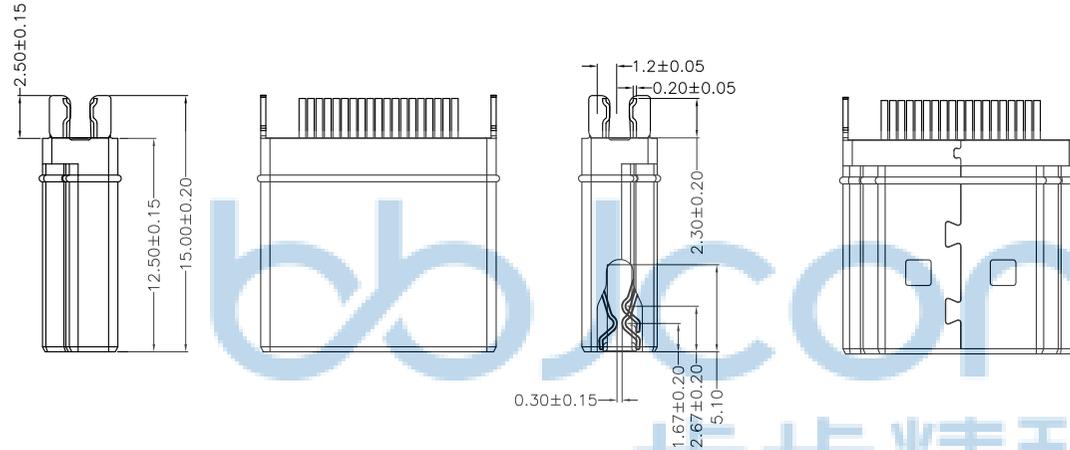


REV.	ECN NO.	CONTENT	DATE	ENGINEER
AO				

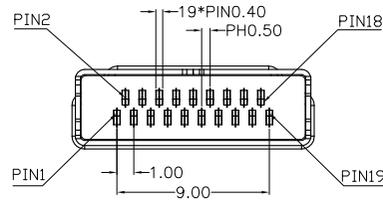

NOTE :

1. SPECIFICATION:

- 1.1. CURRENT RATING: 0.5 Amp Max.
- 1.2. VOLTAGE RATING: 40 V ac(r.m.s) Max.
- 1.3. CONTACT RESISTANCE: 10m ohms Max.mated
- 1.4. INSULATION RESISTANCE:100m ohms Min.
- 1.5. DIELECTRIC WITHSTANDING VOLTAGE:
AC 500V Min. (for 1 minute)
- 1.6. OPERATION TEMPERATURE RANGE:-25°C~85°C

2. MECHANICAL

- 2.1 INSERTION FORCE:4.5KGF MAXMUM
- 2.1 WITHDRAWAL FORCE:1.0KGF MINIMUM;4.0KGF MAXMUM



SHELL	H65-H SPCC	1	GOLD PLATED OVER G/F, PLATED OVER 50u" NI min.
9Pin CONTACT	C5191	9	CONTACT AREA: GOLD PLATED OVER 50u" NI min. SOLDED AREA:100u" MIST TIN PLATED OVER 50u" NI min.
10Pin CONTACT	C5191	10	CONTACT AREA: GOLD PLATED OVER 50u" NI min. SOLDED AREA:100u" MIST TIN PLATED OVER 50u" NI min.
BACK INSERT HO/SING	LCP	1	BLACK,UL 94V-0
HO/SING	LCP	1	BLACK,UL 94V-0
PART NAME	Mechanical	QT*Y	NOTE

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.




PDWG:NO: 0301-1

APPD. JM_Zheng
CHKD. LYX
DR. SGF

NAME: HDMI A TYPE 180度 H=12.50 公头 夹板1.2 铁壳 镀镍 有筋 (A版)
PJ. NO.: HD.04.61-14-B002
SIZE: A4 DRW NO.:
FINISH: SEE NOTES MAT'L.: SEE NOTES
SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2

深圳市步步精科技有限公司

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0				

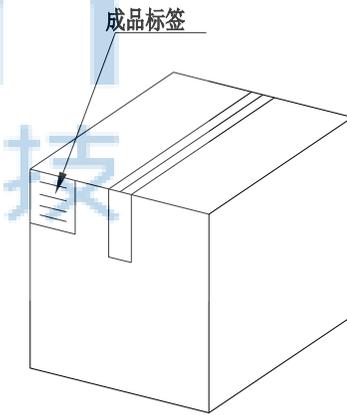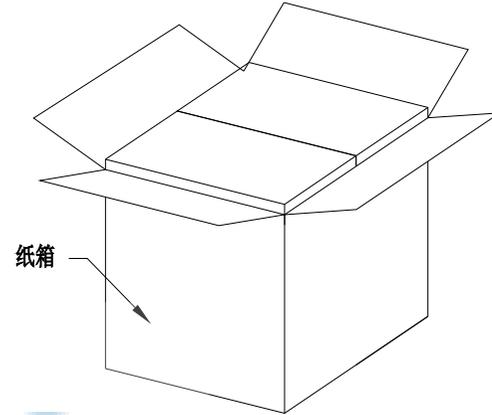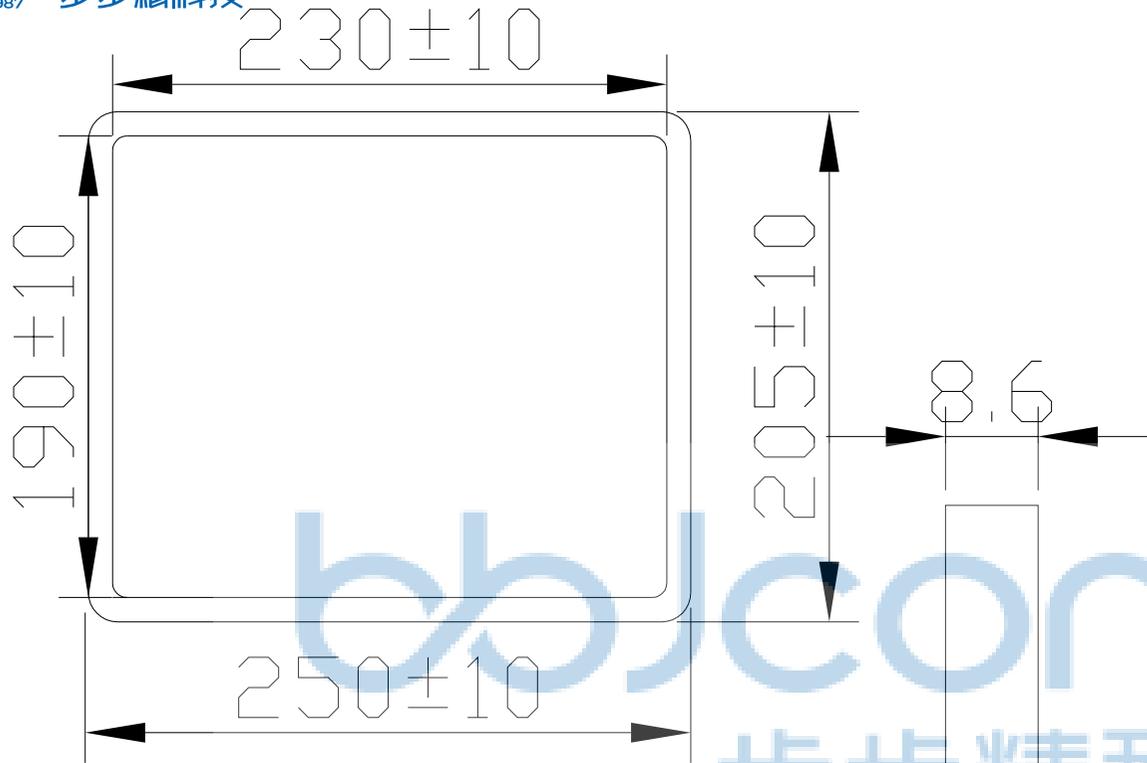

纸箱规格: 350*210*290

1. 包装要求:

- 1.1 每盒吸塑盒包装100pcs;
- 1.2 每20盘放一箱, 共计2000PCS;
- 1.3 纸箱外贴上标签



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 .X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13 X': $\pm 3'$.X': $\pm 2'$.XX': $\pm 1'$		NAME: HDMI A TYPE 180度 H=12.50 公头 夹板1.2 铁壳 镀镍 有筋 (A版)	
APPD.	JM_Zheng	PJ. NO.: HD.04.61-14-B002 SIZE: A4 DRW NO.:		FINISH: SEE NOTES MAT'L.: SEE NOTES	
CHKD.	LYX	SCALE: N/A		REV.: A0	UNIT: mm
PDWG.NO:	0301-1	DR.	SGF	PAGE: 2/2	