


REV.	ECN NO	CONTENT	DATE	ENGINEER
A0				

塞子

NOTE:

1. Electrical
 - 1.1 Roted Voltage:40V AC/DC maximum
 - 1.2 Rated Current:0.5A maximum
 - 1.3 Dielectric strength:100V AC/1 minute leakage current 10mA Max.
 - 1.4 Insulation Resistance::15V DC 10M MIN.
 - 1.5 Contact Resistance:30m Maximum
2. Mechanical
 - 2.1 Insertion Force Max:44.1N maximum
 - 2.2 Withdrawing Force:7N minimum, 25N maximum
 - 2.3 Durability: 5000 cycles at 100±50 cycles per hour. Contact chane from initial value:30miniohms Max.
3. Ambient Temperature:-25° C to +85° C

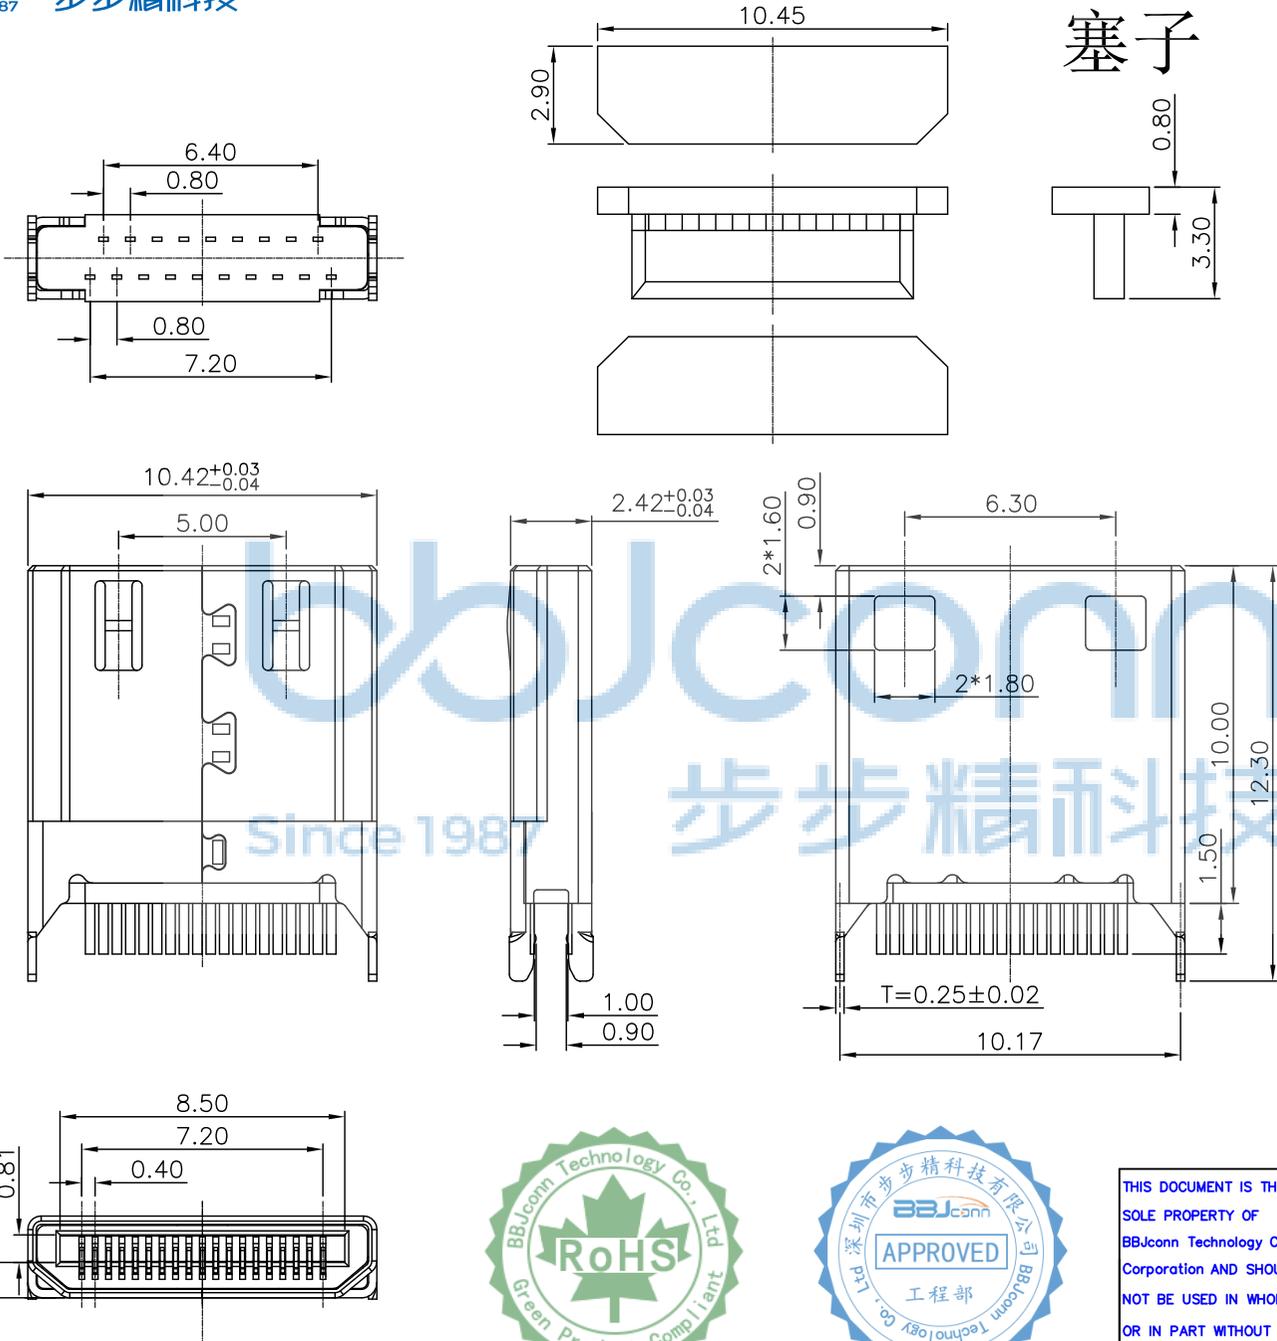

5	塞子	LCP E130i	黑色	1
4	外壳	C2680 (H) T=0.25±0.02mm	镀镍或镀金	1
3	前盖	LCP E130i	黑色	1
2	胶心	LCP E130i	黑色	1
1	端子	C5191RH, T=0.12±0.01mm	前金后锡1U"	19
项次	名称	材质	表面	数量



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWNG,NO: 0301-1

深圳市步步精科技有限公司

NAME: HDMI C 19P公头 180度 H=10.00 夹板1.0 LCP黑胶 铜壳 镀金G/F

APPD. JM_Zheng

CHKD. LYX

DR. SGF




PJ. NO.: HD.04.61-24-B002

SIZE: A4 | DRW NO.:

FINISH: SEE NOTES | MAT'L.: SEE NOTES

SCALE: N/A | REV.: A0 | UNIT: mm | PAGE: 1/2

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0				

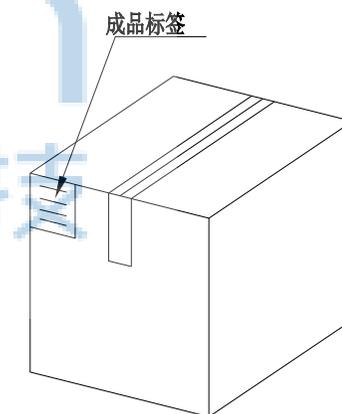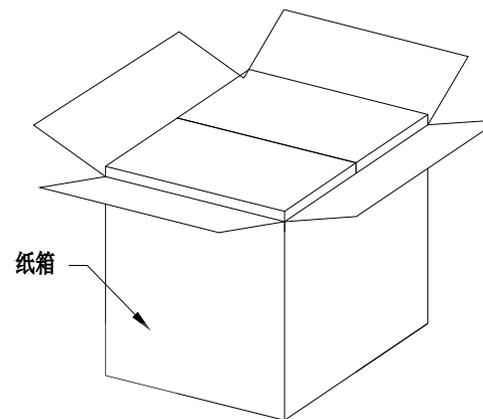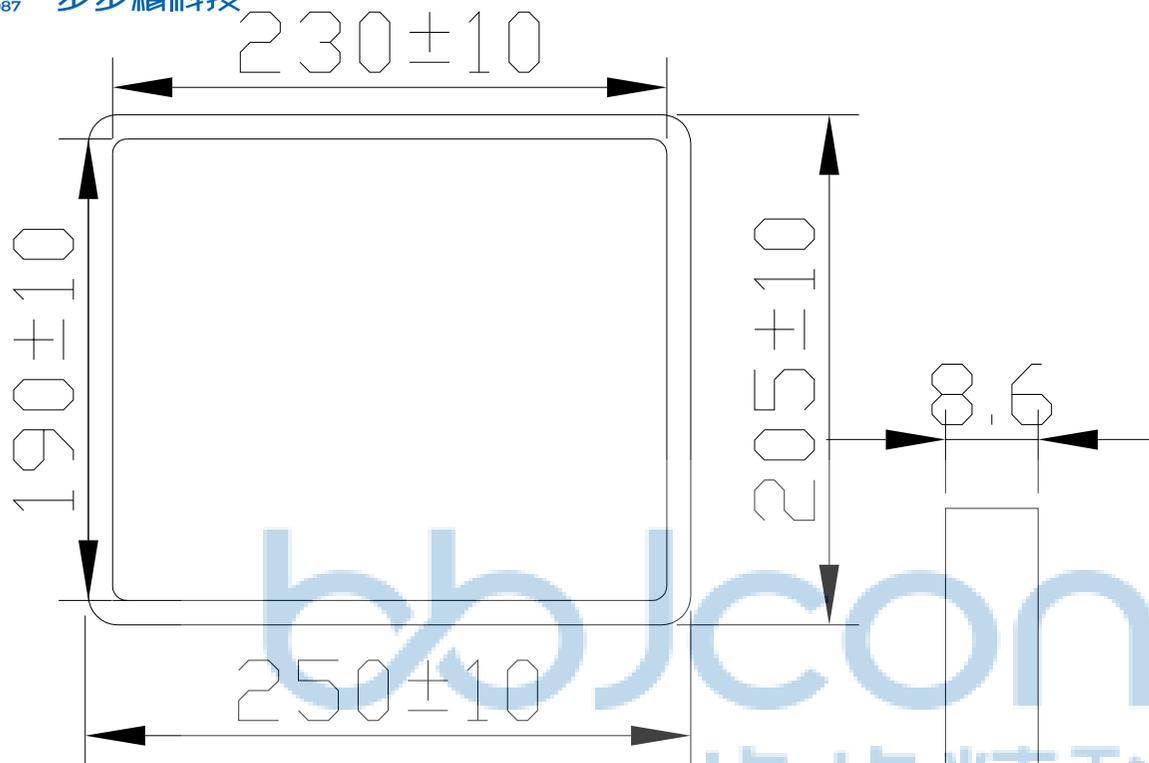

纸箱规格: 350*210*290

1. 包装要求:

- 1.1 每盒吸塑盒包装100 pcs;
- 1.2 每20盘放一箱, 共计2000PCS;
- 1.3 纸箱外贴上标签



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 .X: ± 0.38 .X': $\pm 3'$.XX: ± 0.25 .X'': $\pm 2'$.XXX: ± 0.13 .XX': $\pm 1'$		NAME: HDMI C 19P公头 180度 H=10.00 夹板1.0 LCP黑胶 铜壳 镀金G/F	
APPD.	JM_Zheng	PJ. NO.: HD.04.61-24-B002 SIZE: A4 DRW NO.:		FINISH: SEE NOTES MAT'L.: SEE NOTES	
CHKD.	LYX	SCALE: N/A		REV.: A0	UNIT: mm
PDWG.NO:	0301-1	DR.	SGF	PAGE: 2/2	