
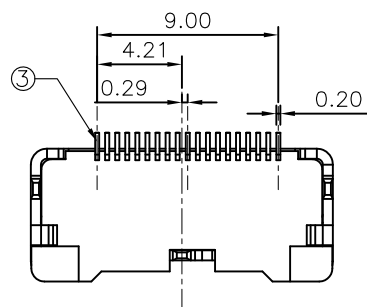
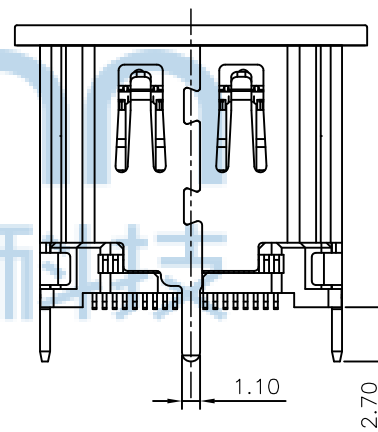
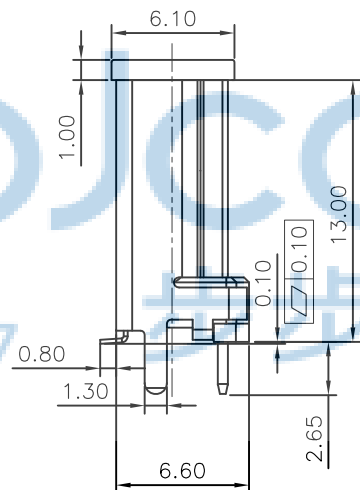
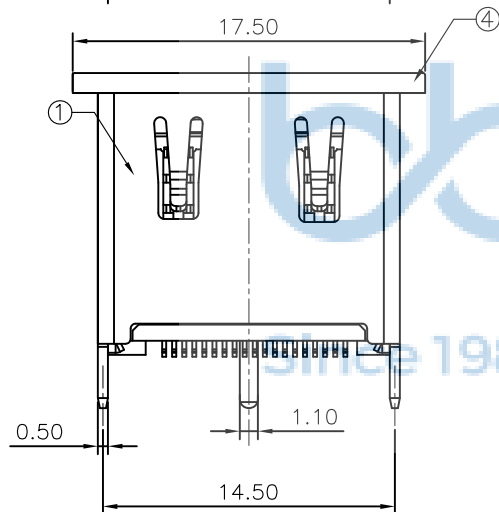
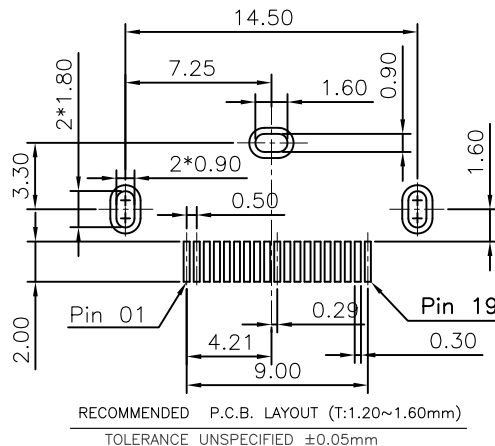


REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0				

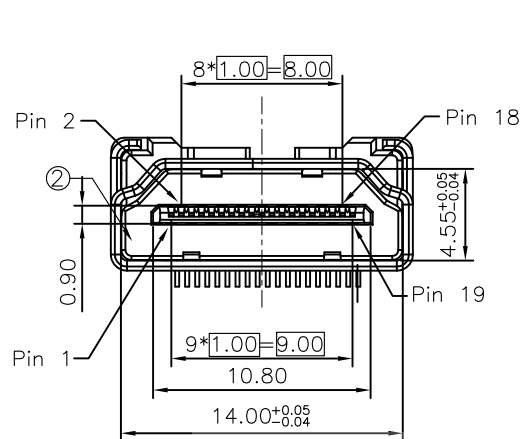

SPECIFICATIONS

1. OPERATING CURRENT: 0.5A MAX.
2. OPERATION TEMPERATURE: -25° C TO +85° C
3. DIELECTRIC WITHSTANDING VOLTAGE:
500Volts AC BETWEEN ADJACENT TERMINAL (UNMATED)
300Volts AC BETWEEN ADJACENT TERMINAL (MATED)
4. INSULATION RESISTANCE:
100Mohm MIN. (UNMATED) ;10Mohm MIN. (MATED)
5. HDMI SPECIFICATION COMPLIANCE
6. 盐雾测试：国际标准要求，温度35℃，浓度5%的盐水，24H，用清水洗净后观测，产品无氧化、无锈蚀
7. 寿命测试：≥10000次

4	DUST COVER	1	THERMOPLASTIC UL94V-0
3	CONTACTS	19	COPPER ALLOY, GOLD PLATED OVER NICKEL ON CONTACT AREA AND 100% MIN. TIN PLATED OVER NICKEL ON SOLDER TAILS
2	HOUSING	1	THERMOPLASTIC UL94V-0
1	SHELL	1	SPCC, NICKEL PLATED
ITFM	NAMF	Q' TY	NOTFS



THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.

PDWG.NO: 0295-1



深圳市步步精科技有限公司


NAME: HDMI AF 19PIN 立贴式 SMT 三脚插板 H=13.00mm 带防尘盖 180度 SMT铁壳

	PJ. NO.: HD.01.51-11-J001
---	---------------------------

SIZE: A4 DRW NO.:

FINISH: SEE NOTES	MAT'L.: SEE NOTES
-------------------	-------------------

SCALE: N/A	REV.: A0	UNIT: mm	PAGE: 1/2
------------	----------	----------	-----------

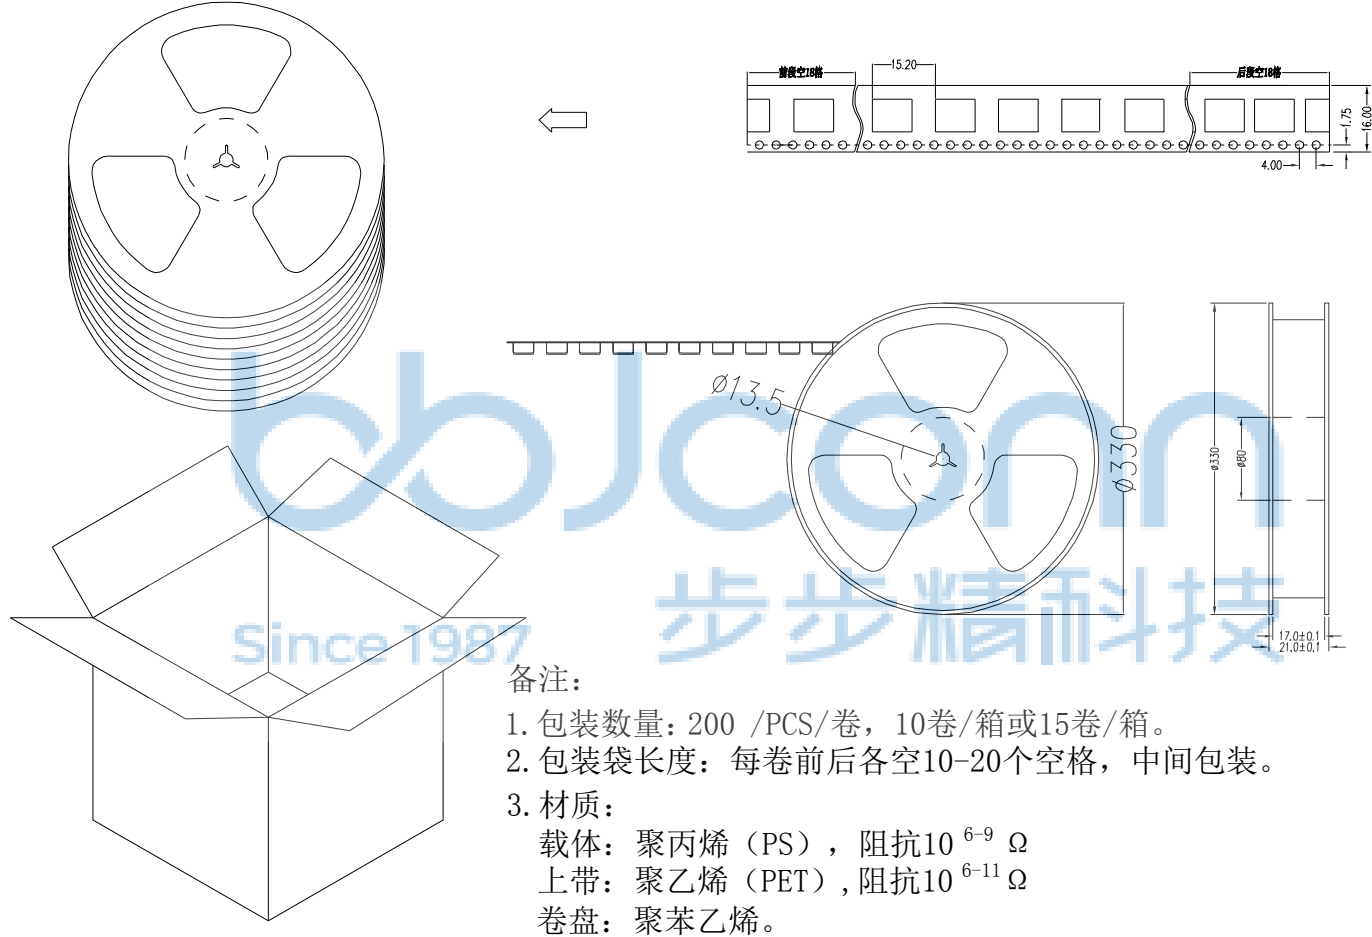

备注:
1. 包装数量: 200 /PCS/卷, 10卷/箱或15卷/箱。
2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
3. 材质:
载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
卷盘: 聚苯乙烯。

纸箱规格: 345*345*23MM
纸箱规格: 345*345*35MM



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13		NAME: HDMI AF 19PIN 立贴式 SMT 三脚插板 H=13.00mm 带防尘盖 180度 SMT铁壳	
APPD. JM_Zheng		PJ. NO.: HD.01.51-11-J001	
CHKD. LYX		SIZE: A4 DRW NO.:	
PDWG.NO: 0295-1		FINISH: SEE NOTES MAT'L.: SEE NOTES	
DR. SGF		SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	