

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	SGF

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC RMS
2. CURRENT RATING : 1.5 AMPS@25° C
3. CONTACT RESISTANCE : 20 MΩ MIN @500VDC.
4. INSULATION RESISTANCE : 1000 MΩ MIN @500VDC.
5. WITHSTAND VOLTAGE : 1000 VAC RMS, contact to contact or 1500VDC, contact to screen and test panel @0.5mA 50Hz or 60Hz 1 min.

MECHANICAL:

1. HOUSING&INSERT& MATERIAL : PBT/PA66 UL94V-0.
2. CONTACT MATERIAL : PHOSPHOR BRONZE /
3. CONTACT PLATING : GOLD PLATING OVER NICKEL.
4. MATING/UNMATING FORCE: : 30N Max..
5. RETENTION STRENGTH : 50N for 60s ± 5s.
6. DURABILITY : 750 CYCLES MIN.

ENVIRONMENTAL:

1. STORAGE TEMPERATURE : -40°C to +85°C RELATIVE HUMIDITY <80%
 2. OPERATION TEMPERATURE : -40°C to +85°C
- MATES WITH MODULAR PLUG CONFORMING TO IEC-60603 & TIA-1096
- ROHS PART NUMBER:

电气特性:



1. 额定电压: 125 VAC RMS
2. 额定电流: 1.5 AMPS@25° C
3. 接触电阻: 20mΩ MAX.
4. 绝缘电阻: 1000 MΩ MIN.@500 VDC
5. 耐压强度: 1000 VAC RMS, contact to contact 或 1500VDC, contact to screen and test panel @0.5mA 50Hz 或 60Hz 1 分钟.

机构特性:

1. 塑壳材质: PBT/PA66, UL94V-0;
2. $\phi 0.46\text{mm}$;
- 3.
4. 插入/拔出力: 30N Max.
5. 配合强度: 50N for 60s ± 5s.
6. 使用寿命: 最少750次插拔.

环境特性:




1. 储存温度: -40°C to +85°C. 相对湿度<80%.
2. 工作温度: -40°C to +85°C

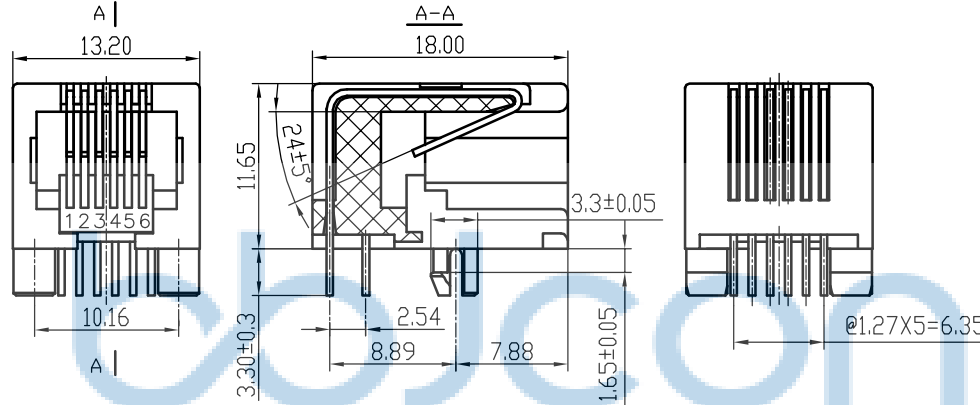

PC BOARD LAYOUT
THICKNESS=1.6MM



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 工程部部长	
PDWG, NO:	0457-1	.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X*: ±3" X*: ±2" X*: ±1"
APPD.	JM_Zheng	NAME:	网络接口 RJ11 1x1 5321 6P 90度 无灯无弹
CHKD.	LYX	PJ. NO.:	RJ.01.12-11-9002
DR.	SGF	SIZE: A4	DRW NO.:
		FINISH: SEE NOTES	MAT'L.: SEE NOTES
		SCALE: N/A	REV.: A0
		UNIT: mm	PAGE: 1/2

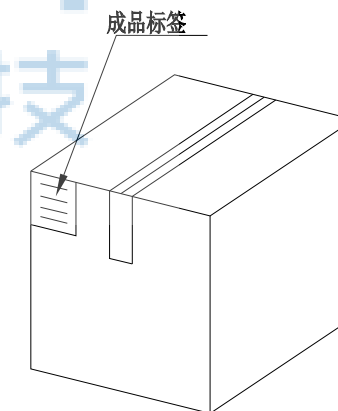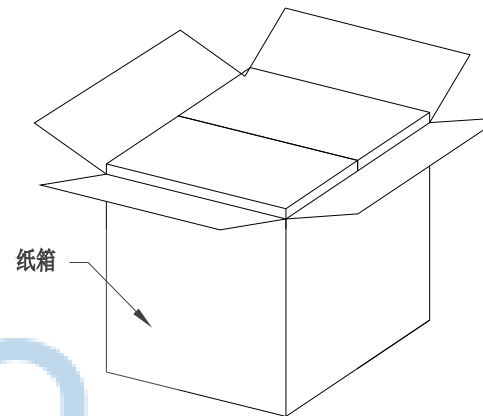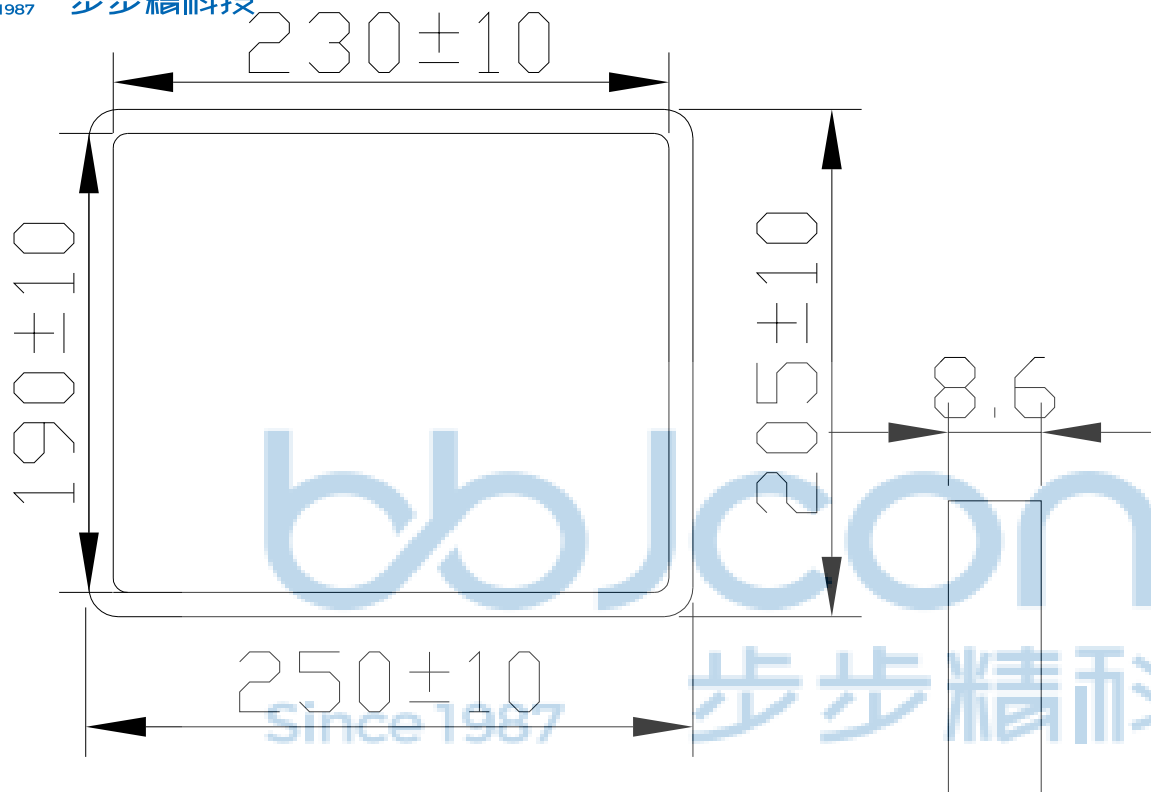

1. 包装要求:

- 1.1 每盒吸塑盒包装120pcs;
- 1.2 每20盘放一箱, 共计2400PCS;
- 1.3 纸箱外贴上标签

纸箱规格: 350*210*290

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3" .X*: ±2" .XX*: ±1"	
APPD.	JM_Zheng	NAME: 网络接口 RJ11 1x1 5321 6P 90度 无灯无弹	
CHKD.	LYX	PJ. NO.: RJ.01.12-11-9002	
DR.	SGF	SIZE: A4 DRW NO.:	
PDWG.NO: 0457-1		FINISH: SEE NOTES MAT'L.: SEE NOTES	
		SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	