



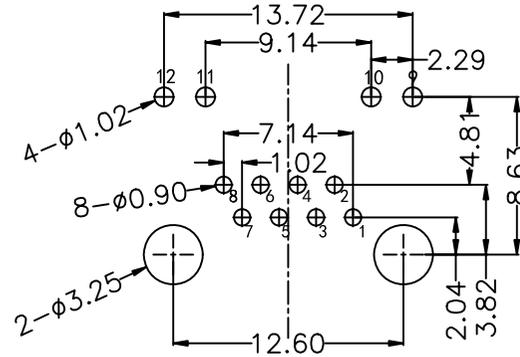

REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0			2023/20/04	

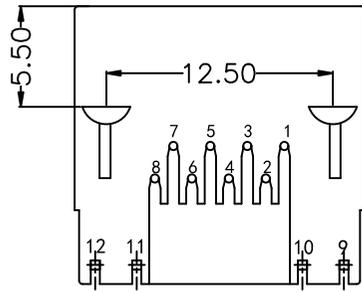

RECOMMENDED PCB LAYOUT  
VIEWED FROM COMPONENT SIDE

**MATERIAL:**



HOUSING: PBT,UL94V-0,BLACK.  
TERMINAL: PHOSPHOR BRONZE  $\phi=0.46\text{MM}$ ,  
G/FU" GOLD PLATING ON CONTACT AREA.

**MACHANICAL:**

DURABILITY: 750 CYCLES MIN,12.5MM/MINUTE.  
INSERTION FORCE: 2.2KG.F MAX.  
RETENTION STRENGTH : 7.7KG.F BETWEEN JACK AND PLUG.  
OPERATING TEMPERATURE:  $-40^{\circ}\text{C}\sim+85^{\circ}\text{C}$ .  
STORAGE TEMPERATURE:  $-40^{\circ}\text{C}\sim+85^{\circ}\text{C}$ .  
ALL CRITICAL DIMENSIONS WITH "\*"



**ELECTRICAL:**

VOLTAGE: 125 VOLTS AC.  
CURRENT RATING : 1.5AMP.  
DIELECTRIC STRENGTH: 1000 VAC RMS 50HZ OR 60HZ,1MIN.  
INSULATION RESISTANCE: 500 MEGA OHMS MIN. INITIAL  
AFTER 500V DC FOR 1 MINUTE.  
CONTACT RESISTANCE: SINGLE TERMINAL 30 MILLIOHMS MAX.  
INITIAL 50 MILLIOHMS MAX. AFTER  
DURABILITY TEST.

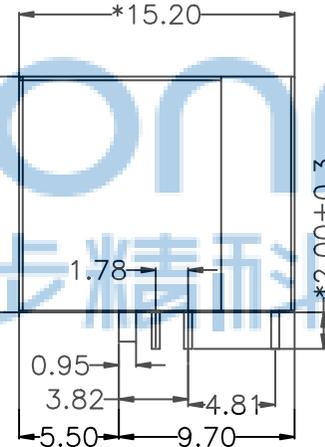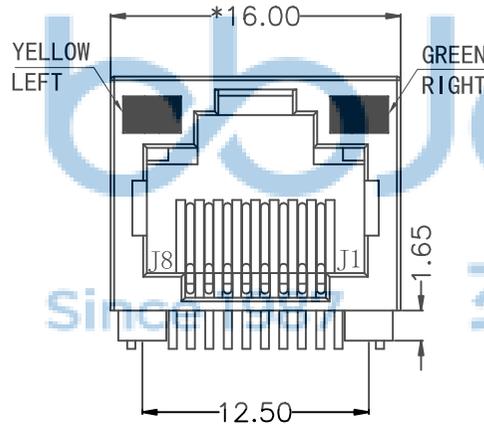


LED Specification

Standard LED Color	LED Wavelength	Foward(A)	Foward(V)
Green	565nm	20mA	1.85-2.45V
Yellow	585nm	20mA	1.7-2.2V

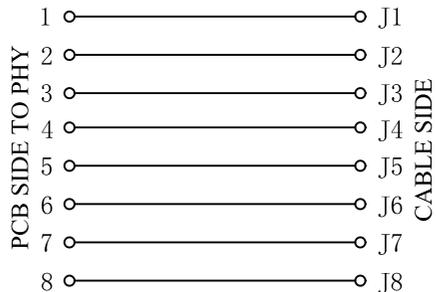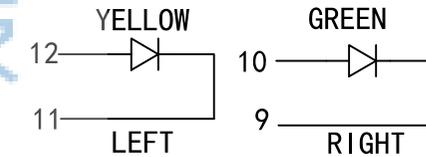

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		<b>深圳市步步精科技有限公司</b>	
PDWG.NO:XX 0521-1		NAME: 网络接口 RJ45直通 1x1 8PBC 56 90度 L=15.20 带灯 左黄右绿 无弹 无隔离 无屏蔽 全塑 带柱 DIP APPD. JM_Zheng 23/05'02 CHKD. TSP 23/05'02 DR. LYX 23/05'02	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X': ±3' .X': ±2' .XX': ±1'	
PJ. NO.: RJ.01.12-21-A001 SIZE: A4 DRW NO.: XX FINISH: SEE NOTES SCALE: N/A REV.: A3 UNIT: mm PAGE: 1/1		MAT'L.: SEE NOTES	

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0			2023 20/04	

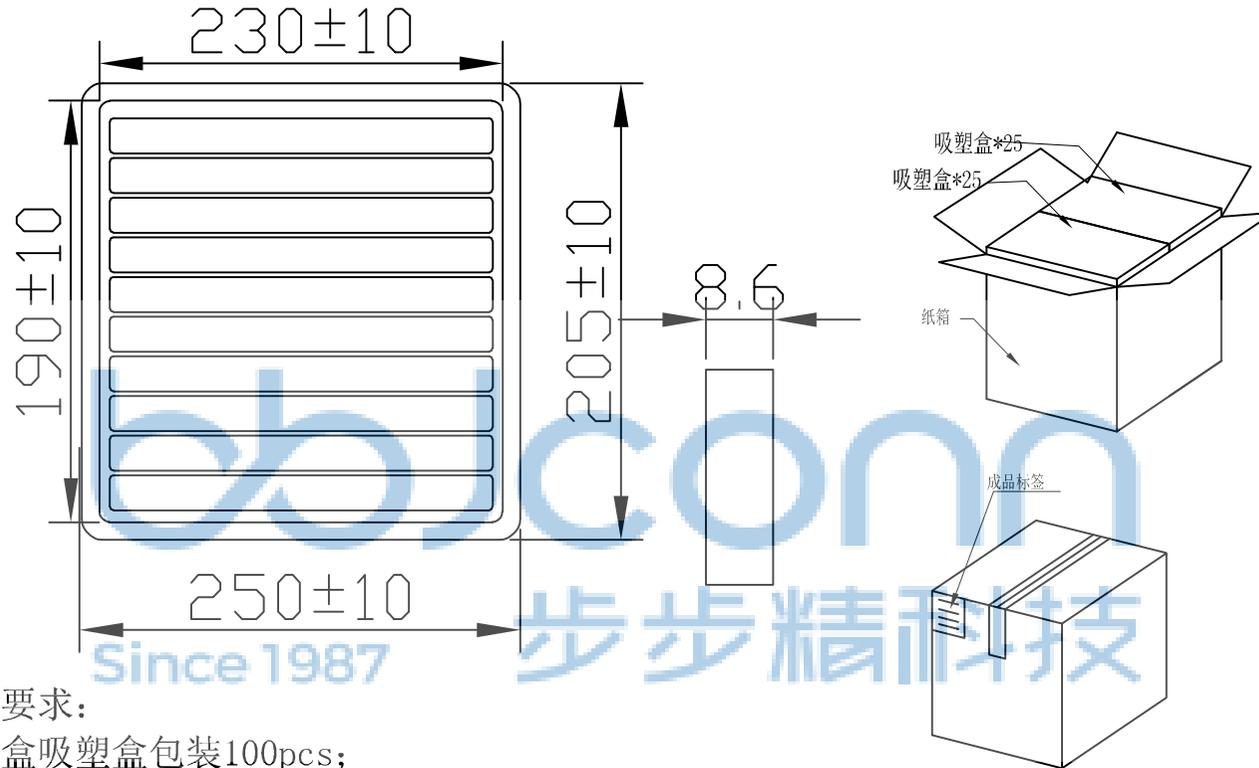

1. 包装要求:
- 1.1 每盒吸塑盒包装100pcs;
  - 1.2 每30盘放一箱, 共计3000PCS;
  - 1.3 纸箱外贴上标签

纸箱规格: 350\*210\*290

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG,NO:XX 0521-1	深圳市步步精科技有限公司 .X: ±0.38 X': ±3' .XX: ±0.25 X'': ±2' .XXX: ±0.13 .XX': ±1'			NAME: 网络接口 RJ45直通 1x1 8P8C 56 90度 L=15.20 带灯 左黄右绿 无弹 无隔离 无屏蔽 全塑 带柱 DIP		
				P.J. NO.: RJ.01.12-21-A001		
	APPD. JM_Zheng 23/05'02	SIZE: A4 DRW NO.: XX		FINISH: SEE NOTES MAT'L.: SEE NOTES		
	CHKD. TSP 23/05'02	SCALE: N/A		REV.: A3	UNIT: mm	PAGE: 1/1
	DR. LYX 23/05'02					