
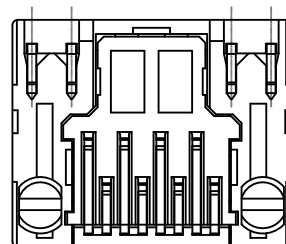
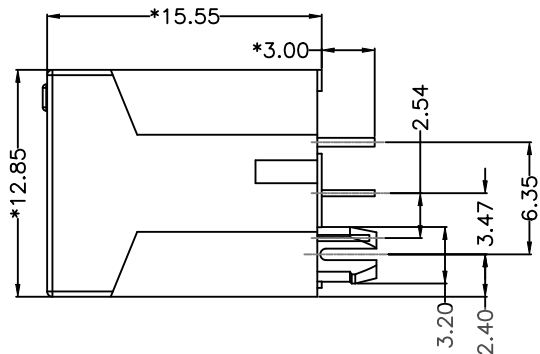




REV.	ECN NO	CONTENT	DATE	ENGINEER
A0				

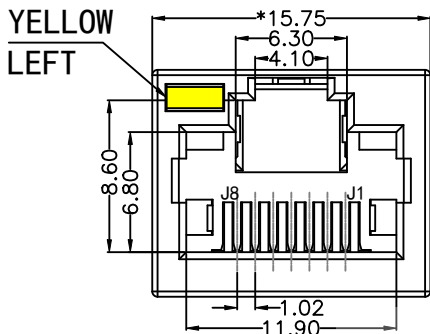

MATERIAL:
HOUSING: PBT,UL94V-0, BLACK.
TERMINAL: PHOSPHOR BRONZE T=0.35MM, G/FU" GOLD PLATING.
SHIELD: C2680,T=0.20MM,20 MIN NICKEL PLATING ON ALL AREA.

MACHANICAL:
DURABILITY: 750 CYCLES MIN,12.5MM/MINUTE.
INSERTION FORCE: 2.2KG.F MAX.
RETENTION STRENGTH : 7.7KG.F BETWEEN JACK AND PLUG.
OPERATING TEMPERATURE: 0℃~+70℃.
STORAGE TEMPERATURE: -40℃~+85℃.
ALL CRITICAL DIMENSIONS WITH "**"



ELECTRICAL:
VOLTAGE: 125 VOLTS AC.
CURRENT RATING : 1.5AMP.
DIELECTRIC STRENGTH: 1000 VAC RMS 50HZ OR 60HZ,1 MIN.
INSULATION RESISTANCE: 500 MEGA OHMS MIN. INITIAL AFTER 500V DC FOR 1 MINUTE.
CONTACT RESISTANCE: SINGLE TERMINAL 30 MILLIOHMS MAX. INITIAL 50 MILLIOHMS MAX. AFTER DURABILITY TEST.

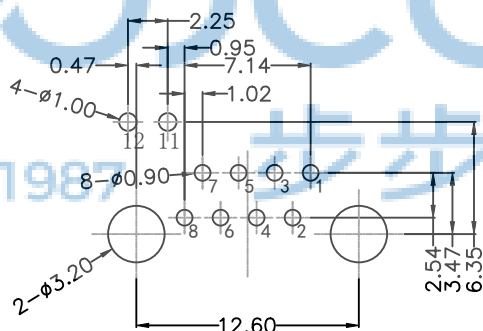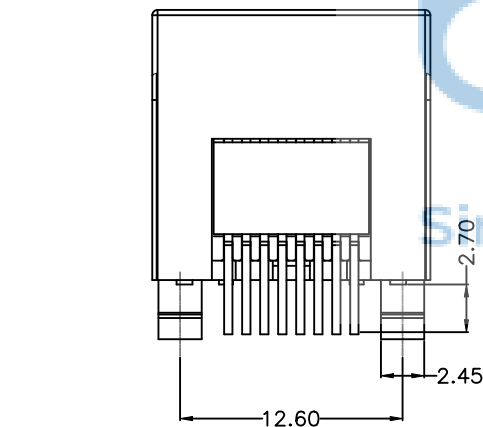


RECOMMENDED PCB LAYOUT
VIEWED FROM COMPONENT SIDE

LED Specification

Standard LED Color	LED Wavelength	Foward(A)	Foward(V)
Yellow	585nm	20mA	1.7-2.2V

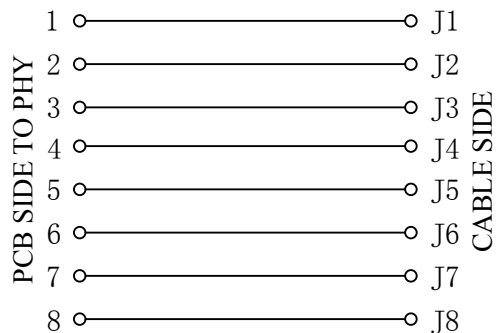

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.	深圳市步步精科技有限公司 .X: ±0.38 .XX: ±0.25 .XXX: ±0.13 X*: ±3" .X*: ±2" .XX*: ±1"		NAME: 网络接口 RJ45 TAB-UP 1x1 8P8C 180度 H=15.55 带单色黄灯 无弹 DIP		
	APPD. JM_Zheng	PJ. NO.: RJ.02.22-21-A003 SIZE: A4 DRW NO.:			
CHKD. LYX	FINISH: SEE NOTES		MAT'L.: SEE NOTES		
PDWG.NO: 0521-1	DR. TSP	SCALE: N/A	REV.: A0	UNIT: mm	PAGE: 1/2

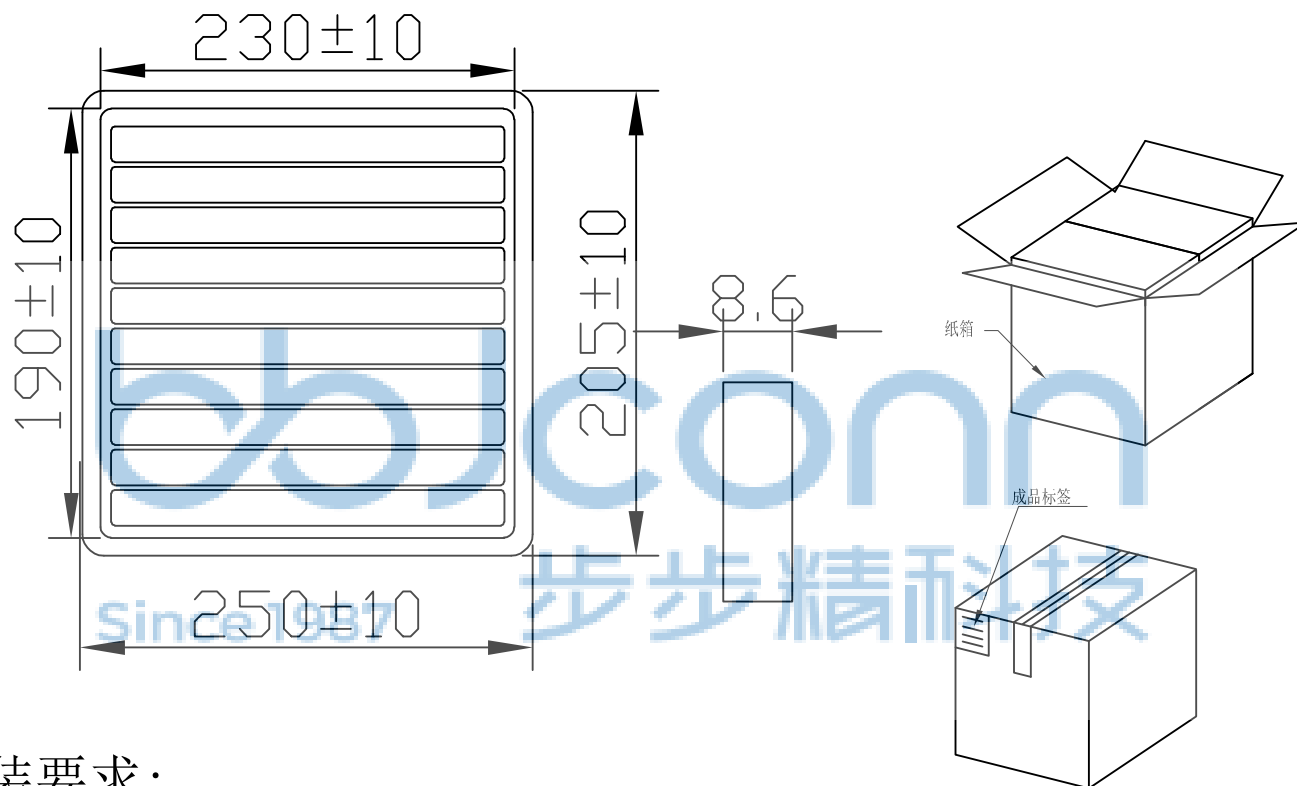

纸箱规格: 350*210*290

1. 包装要求:
- 1.1 每盒吸塑盒包装120pcs;
- 1.2 每34盘放一箱, 共计4080PCS;
- 1.3 纸箱外贴上标签。

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG,NO: 0521-1	深圳市步步精科技有限公司		NAME: 网络接口 RJ45 TAB-UP 1x1 8P8C 180度 H=15.55 带单色黄灯 无弹 DIP	
	.X: ±0.38 .X': ±3" .XX: ±0.25 .X'': ±2" .XXX: ±0.13 .X''': ±1"		PJ. NO.: RJ.02.22-21-A003	
	APPD.	JM_Zheng	SIZE: A4 DRW NO.:	
	CHKD.	LYX	FINISH: SEE NOTES MAT'L.: SEE NOTES	
DR.	TSP	SCALE: N/A	REV.: A0	UNIT: mm PAGE: 2/2