


| REV. | ECN NO. | CONTENT         | DATE | ENGINEER |
|------|---------|-----------------|------|----------|
| A0   |         | Initial release | /    | SGF      |



**MATERIAL:**  
HOUSING: LCP,UL94V-0,BLACK,HF.  
TERMINAL: PHOSPHOR BRONZE T=0.25MM.  
G/FU" GOLD PLATING ON CONTACT AREA.  
SHIELD: C2680,T=0.20MM,20 MIN NICKEL PLATING ON ALL AREA.

**MECHANICAL:**  
DURABILITY: 750 CYCLES MIN,12.5MM/MINUTE.  
INSERTION FORCE: 2.2KG.F MAX.  
RETENTION STRENGTH: 7.7KG.F BETWEEN JACK AND PLUG.  
OPERATING TEMPERATURE: 0℃~+70℃.  
STORAGE TEMPERATURE: -40℃~+85℃.  
ALL CRITICAL DIMENSIONS WITH \*\*\*


**ELECTRICAL:**  
VOLTAGE: 125 VOLTS AC.  
CURRENT RATING: 1.5AMP.  
DIELECTRIC STRENGTH: 1000 VAC RMS 50HZ OR 60HZ,1 MIN.  
INSULATION RESISTANCE: 500 MEGA OHMS MIN. INITIAL AFTER 500V DC FOR 1 MINUTE.  
CONTACT RESISTANCE: SINGLE TERMINAL 30 MILLIOHMS MAX. INITIAL 50 MILLIOHMS MAX. AFTER DURABILITY TEST.

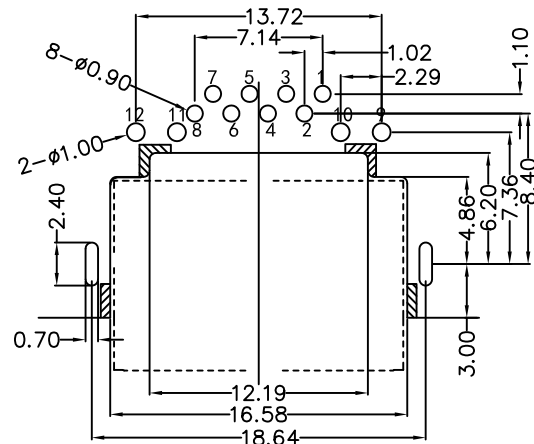


RECOMMENDED PCB LAYOUT  
VIEWED FROM COMPONENT SIDE

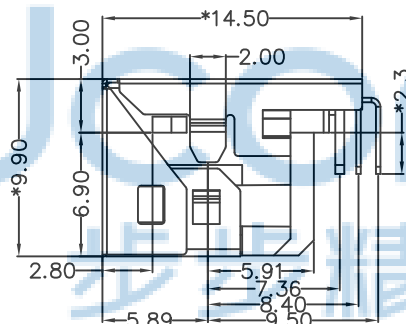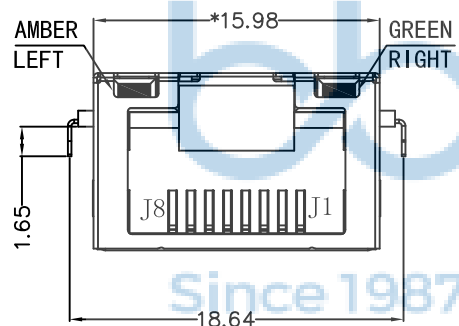

RIGHT SIDE VIEW


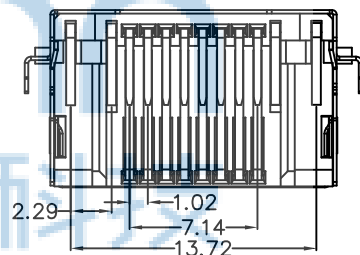


BACK VIEW

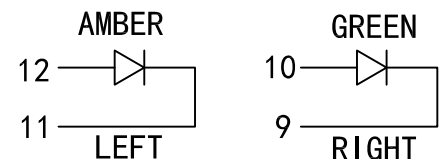


LED Specification

| Standard LED Color | LED Wavelength | Foward(A) | Foward(V)  |
|--------------------|----------------|-----------|------------|
| Green              | 568nm          | 20mA      | 1.85-2.45V |
| Amber              | 585nm          | 20mA      | 1.7-2.2V   |

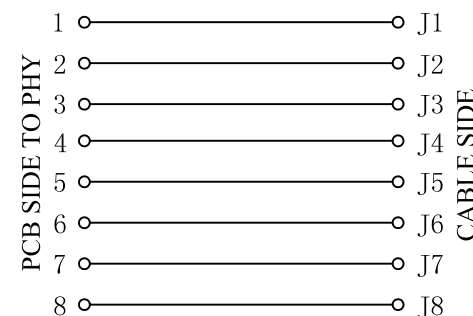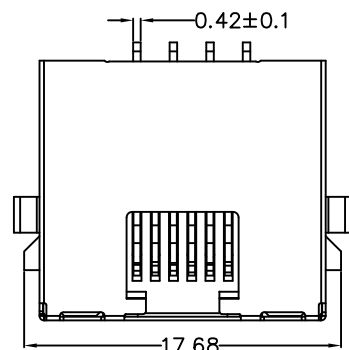

|                                                                                                                                                            |           |                                                                    |                           |
|------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|--------------------------------------------------------------------|---------------------------|
| THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. |           | 深圳市步步精科技有限公司                                                       |                           |
| PDWG.NO: 0521-1                                                                                                                                            | DR. SGF   | NAME: RJ45 90度 1x1 8P8C L=14.50 H=9.90 沉板6.90 带屏蔽 带灯 左黄右绿 无弹 端子DIP | PJ. NO.: RJ.03.22-21-A006 |
| APPD. JM_Zheng                                                                                                                                             | CHKD. LYX | SIZE: A4                                                           | DRW NO.:                  |
|                                                                                                                                                            |           | FINISH: SEE NOTES                                                  | MAT'L.: SEE NOTES         |
|                                                                                                                                                            |           | SCALE: N/A                                                         | REV.: A0                  |
|                                                                                                                                                            |           | UNIT: mm                                                           | PAGE: 1/2                 |

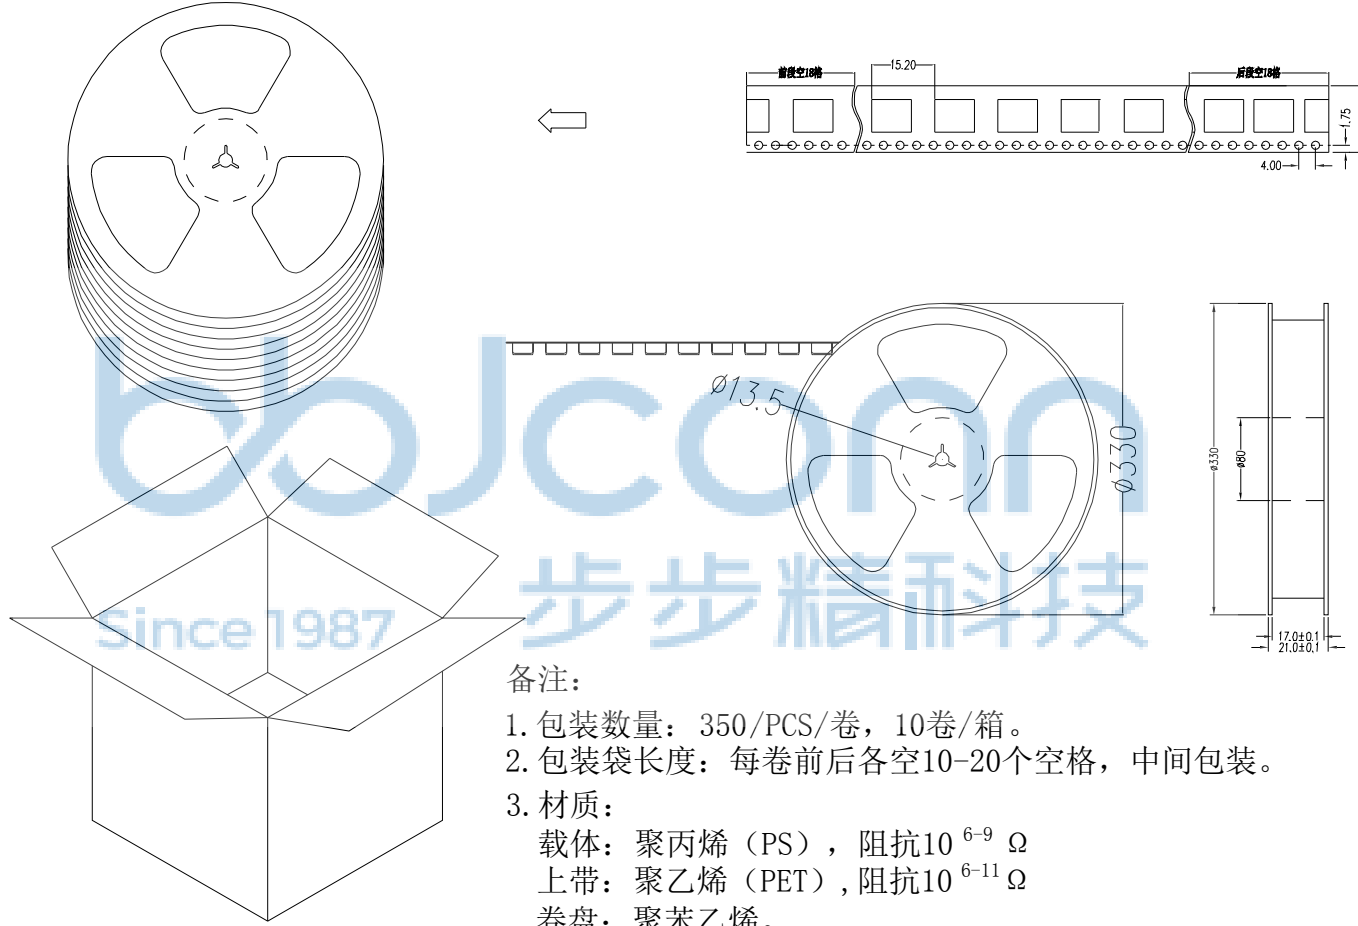

备注:

1. 包装数量: 350/PCS/卷, 10卷/箱。
2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
3. 材质:  
载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$   
上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$   
卷盘: 聚苯乙烯。

纸箱规格: 345\*345\*23MM

纸箱规格: 345\*345\*35MM



|                                                                                                                                                                              |  |                                                                          |  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--------------------------------------------------------------------------|--|
| THIS DOCUMENT IS THE<br>SOLE PROPERTY OF<br>BBJconn Technology Co.,Ltd.<br>Corporation AND SHOULD<br>NOT BE USED IN WHOLE<br>OR IN PART WITHOUT<br>PRIOR WRITTEN PERMISSION. |  | 深圳市步步精科技有限公司                                                             |  |
| .X: $\pm 0.38$<br>.XX: $\pm 0.25$<br>.XXX: $\pm 0.13$                                                                                                                        |  | NAME:<br>RJ45 90度 1x1 8P8C L=14.50 H=9.90 沉板6.90 带屏蔽<br>带灯 左黄右绿 无弹 端子DIP |  |
| APPD. JM_Zheng                                                                                                                                                               |  | PJ. NO.: RJ.03.22-21-A006                                                |  |
| CHKD. LYX                                                                                                                                                                    |  | SIZE: A4 DRW NO.:                                                        |  |
| PDWG.NO: 0521-1                                                                                                                                                              |  | FINISH: SEE NOTES MAT'L.: SEE NOTES                                      |  |
| DR. SGF                                                                                                                                                                      |  | SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2                                   |  |