

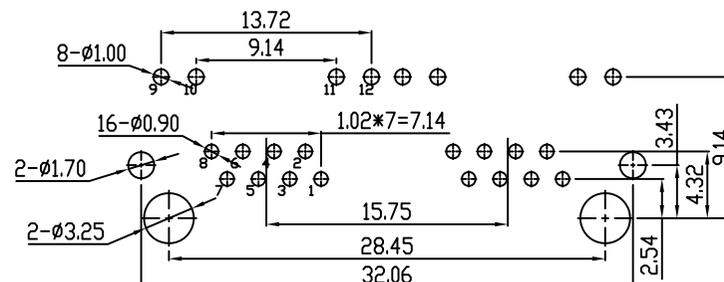
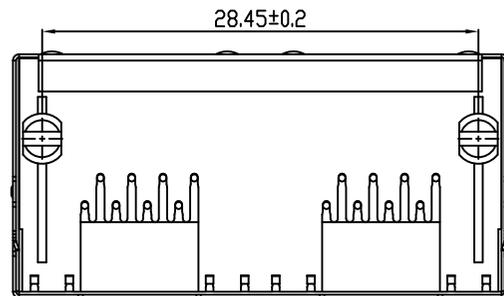
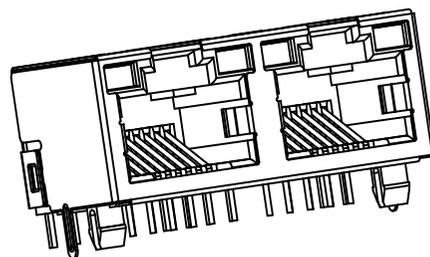



REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	SGF






- NOTES:
- ELECTRICAL:
- VOLTAGE RATING: 125V AC.
 - CURRENT RATING: 1.5A.
 - CONTACT RESISTANCE: 30 mΩ MAX.
 - INSULATION RESISTANCE: 500 MΩ MIN @ 500V DC.
 - DIELECTRIC STRENGTH: 1000V AC 50Hz or 60Hz, 1MIN.
- MECHANICAL:
- INSERT MATERIAL: PBT UL94V-0.
 - CONTACT MATERIAL: $\varnothing 0.46$ mm C51000 (QSn4-0.3) PHOSPHOR BRONZE GOLD PLATING OVER NICKEL.
 - SHIELD: 0.20mm THICKNESS H65Y BRASS NICKEL PLATED.
 - MATING/UNMATING FORCE: 2.2KG.F MAX.
 - RETENTION STRENGTH: 5.0KG.F MIN BETWEEN JACK AND PLUG.
 - OPERATING LIFE: 750 CYCLES MIN.
- ENVIRONMENTAL:
- STORAGE: -40°C ~ +85°C RELATIVE HUMIDITY < 70%.
 - OPERATION: -40°C ~ +85°C.

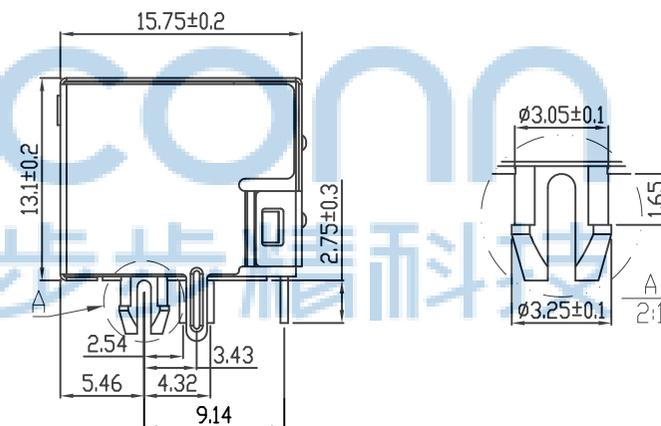

PC Board Layout

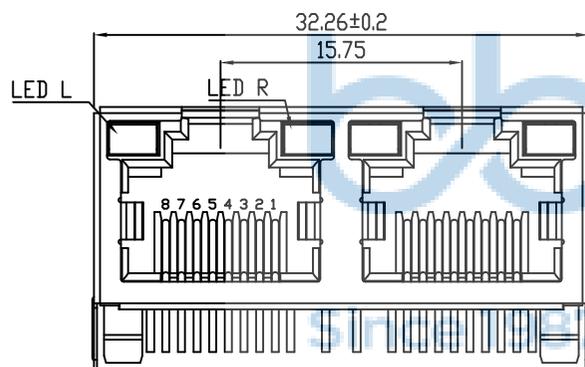

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3* .X*: ±2* .XX*: ±1*	
APPD.	JM_Zheng	NAME: RJ 56S LED 1x2 8P8C 90度 L=15.75 带灯 左黄右绿 无弹 全包 端子DIP 镀金G-F 盐雾8H PBT黑色 (无后背脚) D型	
CHKD.	LYX	PJ. NO.: RJ.01.22-22-8001 SIZE: A4 DRW NO.:	
PDWG.NO:	0385-2	DR.	SGF
		FINISH:	SEE NOTES
		MAT'L.:	SEE NOTES
		SCALE:	N/A
		REV.:	A0
		UNIT:	mm
		PAGE:	1/2

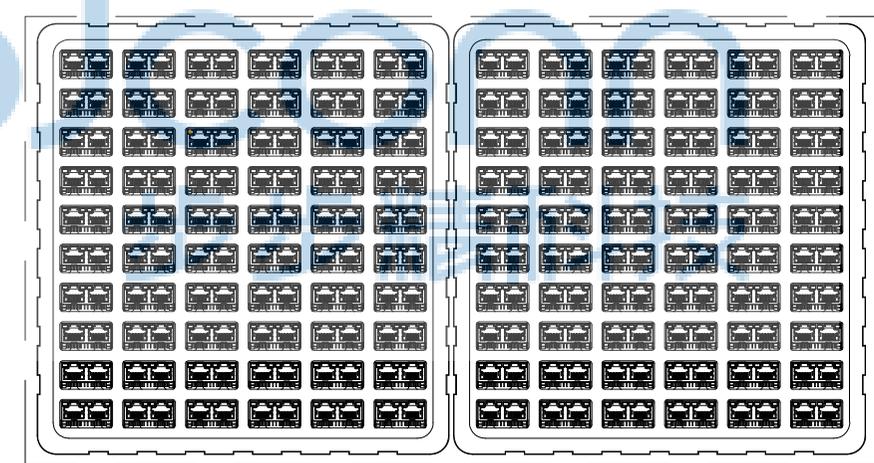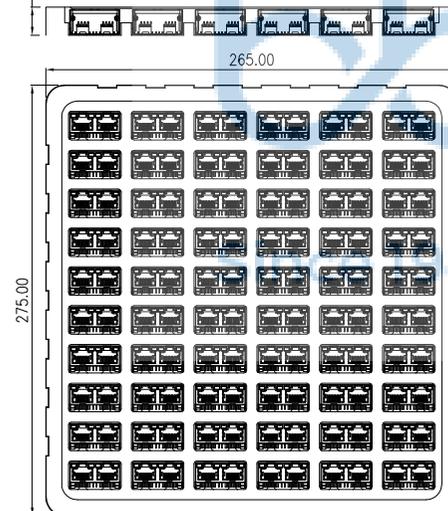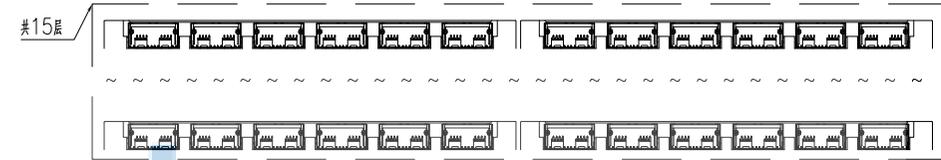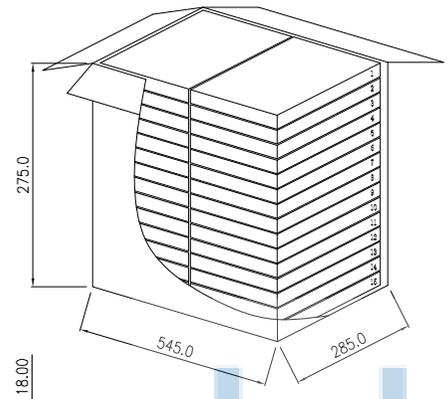

	60 PCS/盒	产品单重/g	7.0
	30 盒/箱	净重 (NW) /kg	12.6
	1800 PCS/箱	毛重 (GW) /kg	16.2
吸塑盒型号		尺寸	275*265*18
纸箱型号		尺寸	545*285*275

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.

PDWG.No: 0385-2

深圳市步步精科技有限公司

.X: ±0.38 .XX: ±0.25 .XXX: ±0.13 X*: ±3' .X*: ±2' .XX*: ±1'

NAME: RJ 56S LED 1x2 8P8C 90度 L=15.75 带灯 左黄右绿 无弹 全包 端子DIP 镀金G-F 盐雾8H PBT黑色 (无后背脚) D型

APPD. JM_Zheng

CHKD. LYX

DR. SGF

PJ. NO.: RJ.01.22-22-8001

SIZE: A4 DRW NO.:

FINISH: SEE NOTES MAT'L.: SEE NOTES

SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2