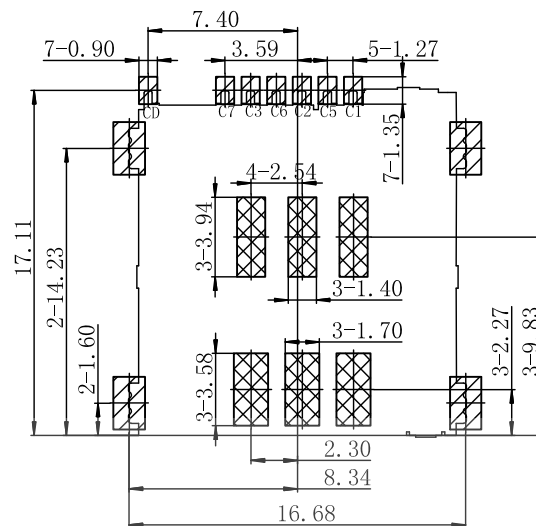



1. MATERIAL:
HOUSING:HighTemperatureThermoplastic
Terminal:CopperAlloy
Shell:StainlessSteel

2. PLATING:
Terminal:50u~NiUNDERPLATEDOVERALL
G/FPLATEDONCONTACTAREA
G/FPLATEDONSOLDERAREA
Shell:30u~NiUNDERPLATEDOVERALL
G/FPLATEDONCONTACTAREAANDSOLDERAREA


3. TECHNICALSPECIALITY:
RATEDVOLTAGE:30VACMAX.
CURRENTRATING:0.5AMAX.
INSULATIONRESISTANCE:1000MΩ MIN
CONTACTREISTANCE:50MΩ MAX
WITHSTANDINGVOLTAGE:500VACFOR1MINUTES
OPERATINGTEMPERATURE:-40℃~+85℃ Humidity80%RHMAX

TOLERANCE: ± 0.05 COPPERRESTRICTEDAREA

1. TOUCHAREAOFCONTACT
TIPSNOELECTRICALFUNCTION
2. NOFIRSTPCB_LAYOUT
CIRCUITSINTHEAREA

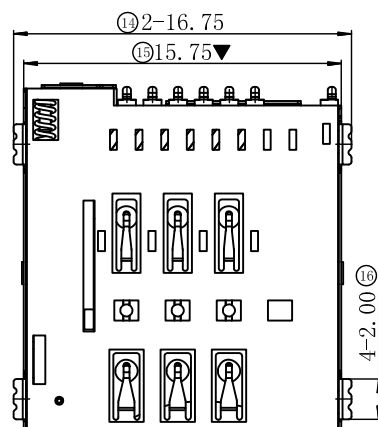

PIIN/NO	ASSIGNMENT
C1	VCC
C2	RST
C3	CLK
CD	DetectSwitch
C5	GND
C6	VPP
C7	I/O

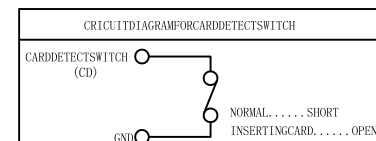

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.

PDWG,NO: 0302-1



深圳市步步精科技有限公司

NAME:
卡座 SIM 外焊卡座 H=1.5 6P 带CD 贴片 无柱




PJ. NO.:	CD.02.02-13-0010
----------	------------------

SIZE: A4	DRW NO.:
----------	----------

FINISH: SEE NOTES	MAT'L.: SEE NOTES
-------------------	-------------------


SCALE: N/A	REV.: A0	UNIT: mm	PAGE: 1/2
------------	----------	----------	-----------

Direction of fuse →


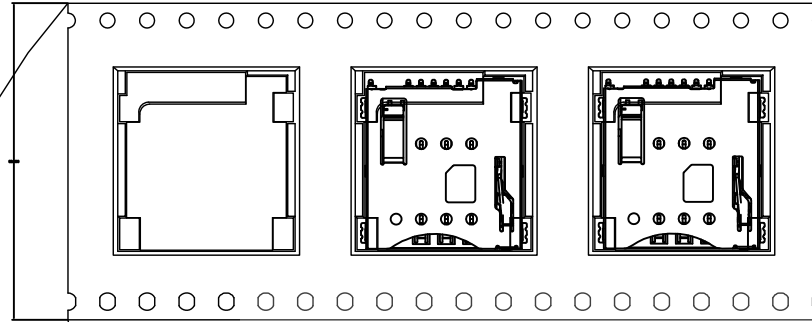


NOTES:

- 1、Packing quantity per plate: 1000PCS/Plate
- 2、Loading and packing method

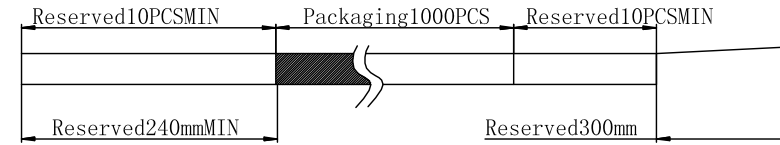

3、Total packaging: 1000PCS/Box

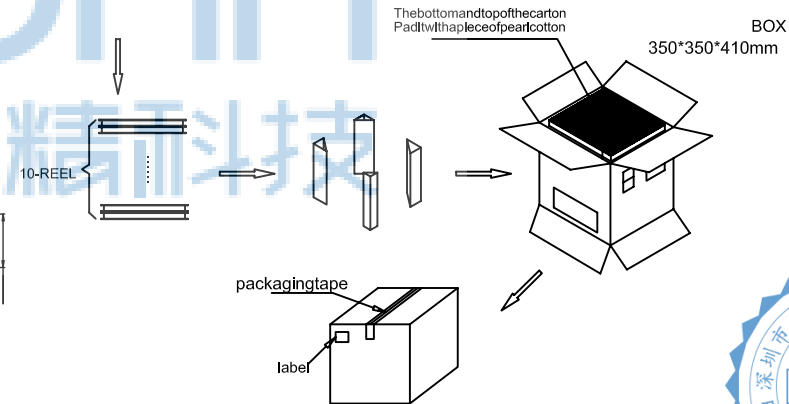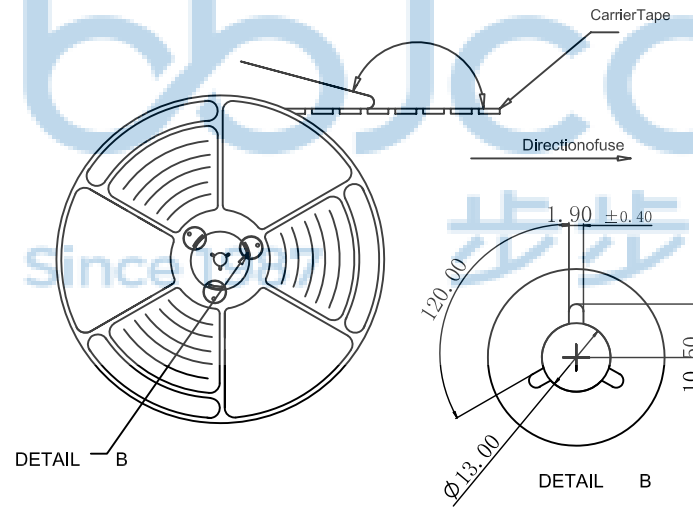

Description	Quantity
Carrierband (Black, PETW=32PH=24,T=0.3)	244.8m
Box (K=K,T=7.0,350*350*410)	1PCS
Self-adhesive (W=25.50)	247.8m
Beam (K=K, T=7.0,95*95*370)	4PCS
PearlWool (340*340*18)	2PCS
REEL (BLUE, 13Inches*32mm, φ330)	10PCS
1.5HP-PM-SIM卡座	10000PCS



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
PDWG.NO: 0302-1	DR. SGF	NAME: 卡座 SIM 外焊卡座 H=1.5 6P 带CD 贴片 无柱	PJ. NO.: CD.02.02-13-0010
APPD. JM_Zheng	CHKD. LYX	SIZE: A4	DRW NO.:
		FINISH: SEE NOTES	MAT'L.: SEE NOTES
		SCALE: N/A	REV.: A0
		UNIT: mm	PAGE: 2/2