
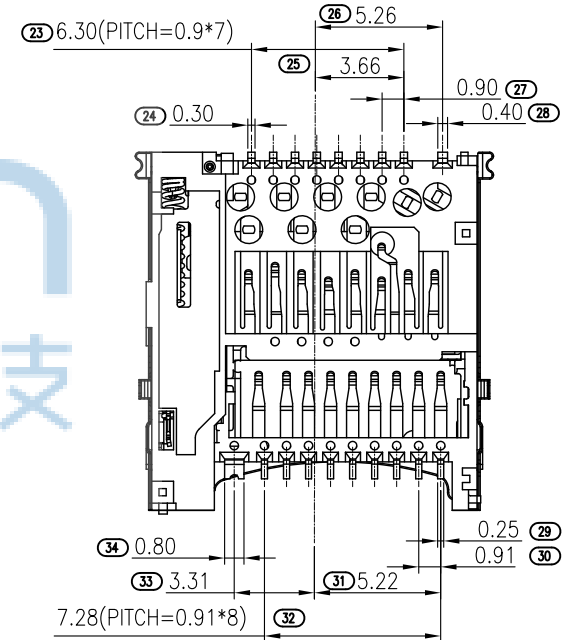
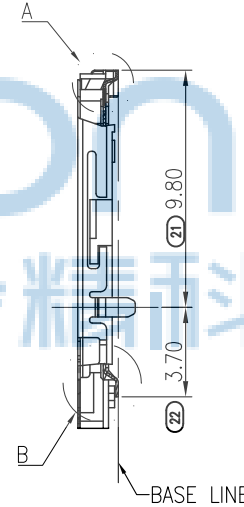
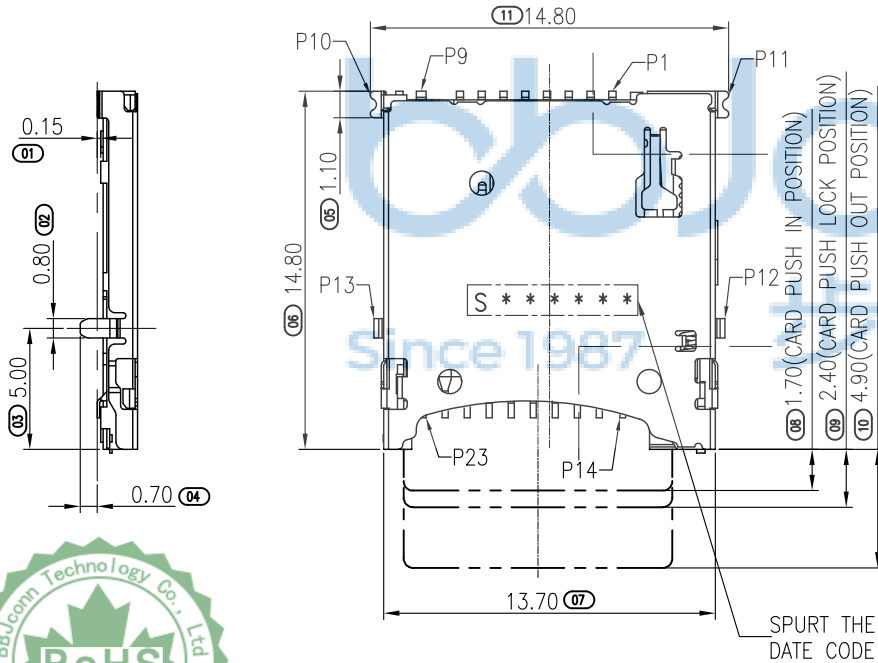




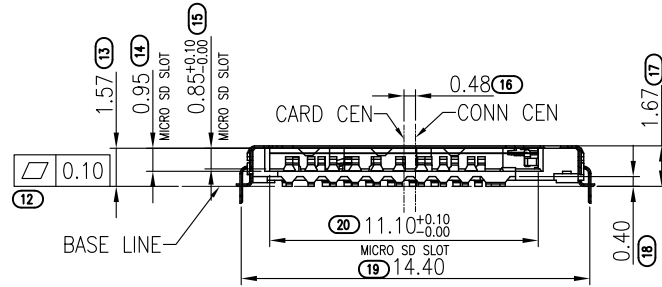


THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.				深圳市步步精科技有限公司			
.X: $\pm$ 0.38 .XX: $\pm$ 0.25 .XXX: $\pm$ 0.13		X': $\pm$ 3' .X': $\pm$ 2' .XX': $\pm$ 1'		NAME: 卡座 Micro SD4.0 H=1.67 外焊卡座			
APPD. JM_Zheng		CHKD. LYX		PJ. NO.: 142-315-230001-V8G			
DR. SGF		SCALE: N/A		REV.: A0			
PDWG.NO: 0302-1		UNIT: mm		PAGE: 1/3			

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	SGF

NOTES:

- (1) MATERIAL:
1-1. PLASTIC: LCP, THERMOPLASTIC UL 94V-0 COLOR: BLACK
1-2. CONTACT: COPPER ALLOY.
1-3. SELL: STAINLESS STEEL.
- (2) PATING:
2-1. CONTACT: CONTACT AREA AU 3U", OVER NI 50U"; SOLDER TAIL AREA: MATTED TIN 80U"MIN, OVER NI 50".
2-2. SHELL: SOLDERABILITY OVER PLATING NI 50U" OVER ALL.
- (3) CONTACT AND TAIL COPLANARITY TO BE 0.10MM MAX.

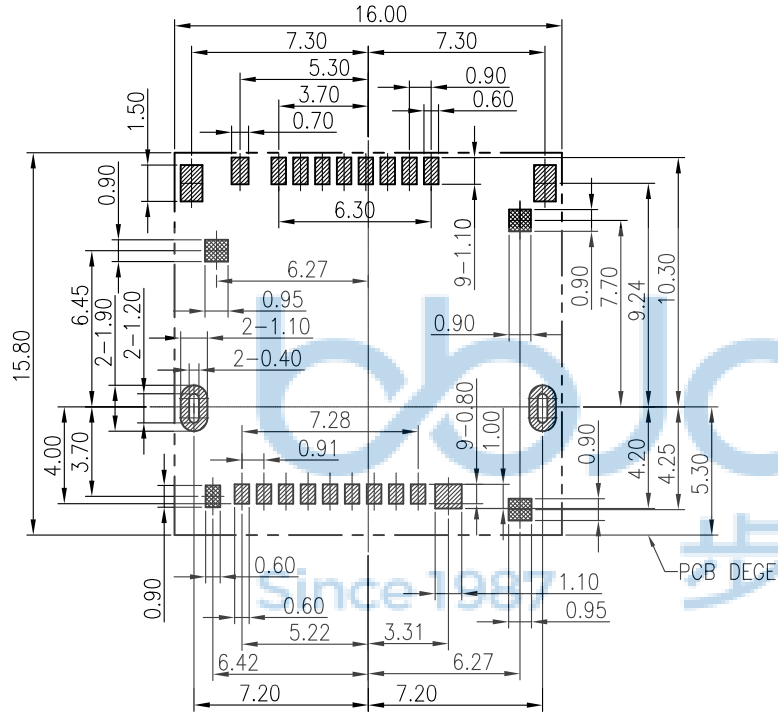

RECOMMENDED P.C.B LAYOUT
TOP VIEW(TOLERANCE+/-0.05)

- PAD AREA
 NO COMPONENT AREA
 RED GLUING AREA



Pin No.	Pin Assignment
P1	MICRO SD DAT2
P2	MICRO SD CD/DAT3
P3	MICRO SD CMD
P4	MICRO SD VDD1
P5	MICRO SD CLK
P6	MICRO SD VSS
P7	MICRO SD DAT0/RCLK
P8	MICRO SD DAT1/RCLK
P9	MICRO SD CD
P10	GND
P11	GND
P12	GND
P13	GND
P14	GND
P15	MICRO SD VDD2
P16	MICRO SD SWIO
P17	MICRO SD VSS
P18	MICRO SD D0+
P19	MICRO SD D0-
P20	MICRO SD VSS
P21	MICRO SD D1-
P22	MICRO SD D1+
P23	MICRO SD VSS

OPENING/CLOSE OF SWITCH

	CARD DETECT SWITCH
CARD UNINSERTION	OPEN
CARD HALF INERTION	OPEN
CARD INSERTION	CLOSE
N/O	

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co., Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.


PDWG.NO: 0302-1



深圳市步步精科技有限公司


NAME:	卡座 Micro SD4.0 H=1.67 外焊卡座
APPD.	JM_Zheng
CHKD.	LYX
DR.	SGF

PJ. NO.:	142-315-230001-V8G
SIZE:	A4
DRW NO.:	
FINISH:	SEE NOTES
MAT'L.:	SEE NOTES
SCALE:	N/A
REV.:	A0
UNIT:	mm
PAGE:	2/3

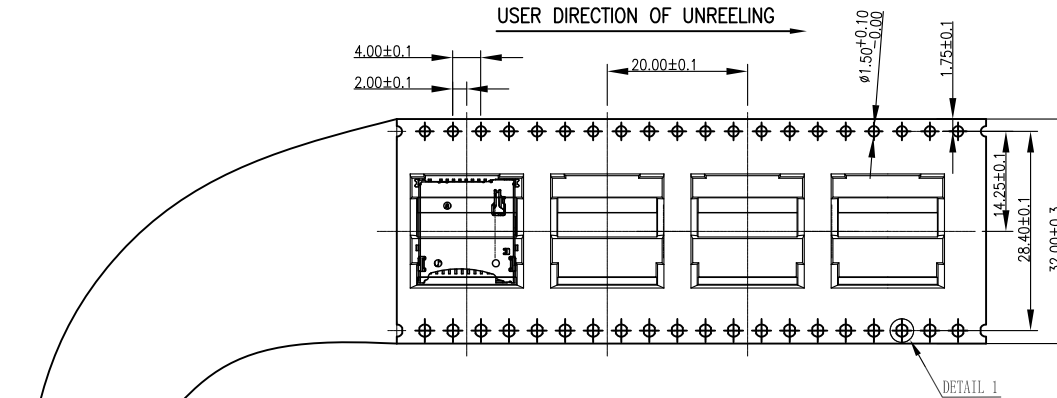


NOTES






1. NUMBER OF CONNECTORS: 1000PCS/REEL
2. LEAD TAPE LENGTH

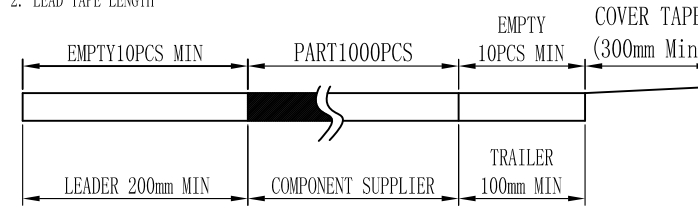

3. QUANTITY: 8000PCS/CARTON

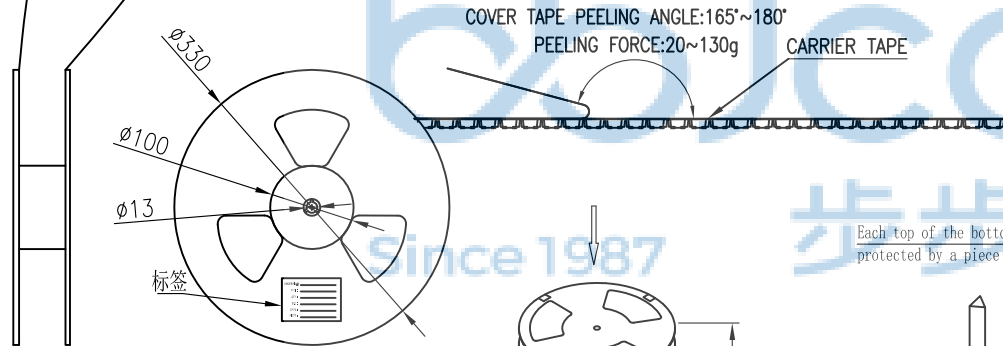

Each top of the bottom of the carton is protected by a piece of pearl cotton

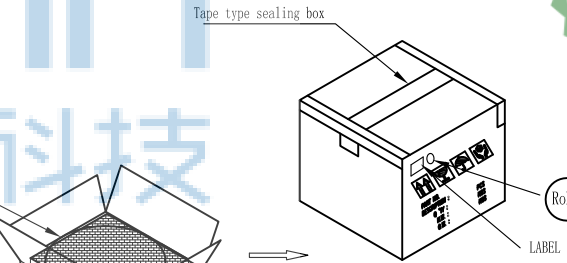

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
PDWG.NO: 0302-1	DR. SGF	NAME: 卡座 Micro SD4.0 H=1.67 外焊卡座	
APPD. JM_Zheng	CHKD. LYX	PJ. NO.: 142-315-230001-V8G	
		SIZE: A4	DRW NO.:
		FINISH: SEE NOTES	MAT'L.: SEE NOTES
		SCALE: N/A	REV.: A0
		UNIT: mm	PAGE: 3/3