
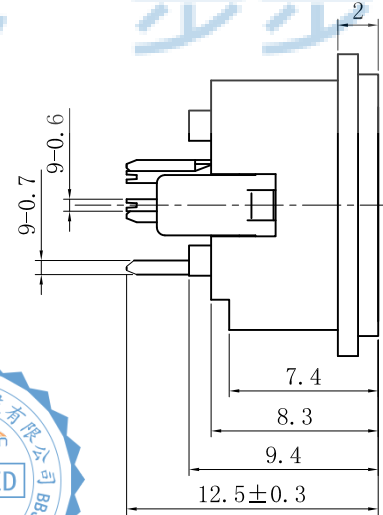
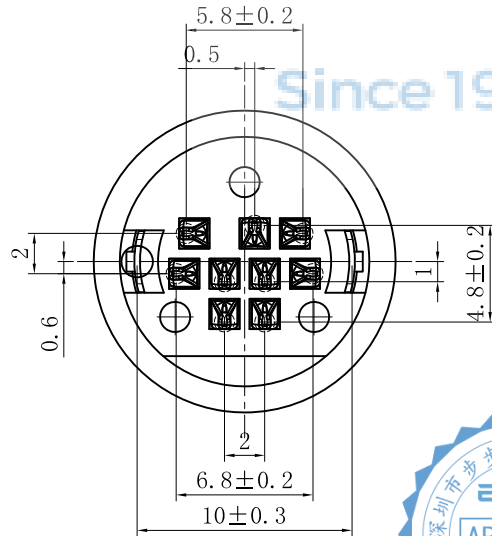
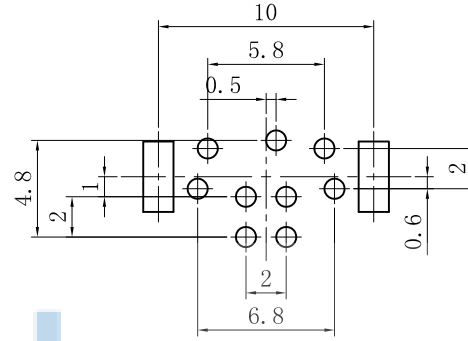


REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	SGF

PCB板安装孔图

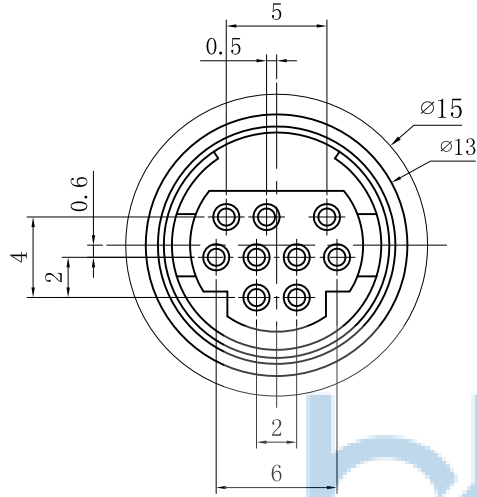

主要技术特性要求:

1. 使用温度范围:

环境温度: -25~+70℃

相对湿度: 95%(40℃)

2. 额定负荷: 1A 12V AC

3. 接触电阻: ≤30mΩ

4. 绝缘电阻: ≥100MΩ

5. 耐压: 250V AC (50Hz) 1min




6. 插拔力: 5~35N

7. 寿命: ≥5000次



3	插针	9	磷铜带 Y=0.2mm	D. Cu/Sn			
2	包圆	1	H62黄铜带 Y1=0.28mm	D. Cu/Sn			
1	基座	1	PBT				
序号	名称	数量	材料	处理	单件质量	总计质量	备注

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.				深圳市步步精科技有限公司			
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3* .X*: ±2* .XX*: ±1*		NAME: Mini-Din MDC-9-04			
APPD. JM_Zheng		CHKD. LYX		PJ. NO.: 168-205-090001-M5G			
PDWG.NO: 0062-1		DR. SGF		SIZE: A4 DRW NO.:			
				FINISH: SEE NOTES MAT'L.: SEE NOTES			
				SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2			

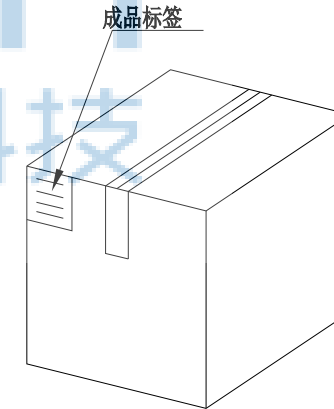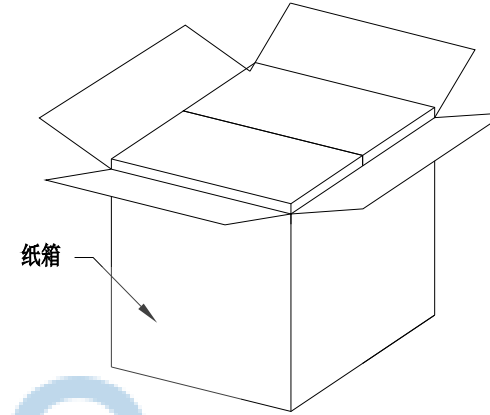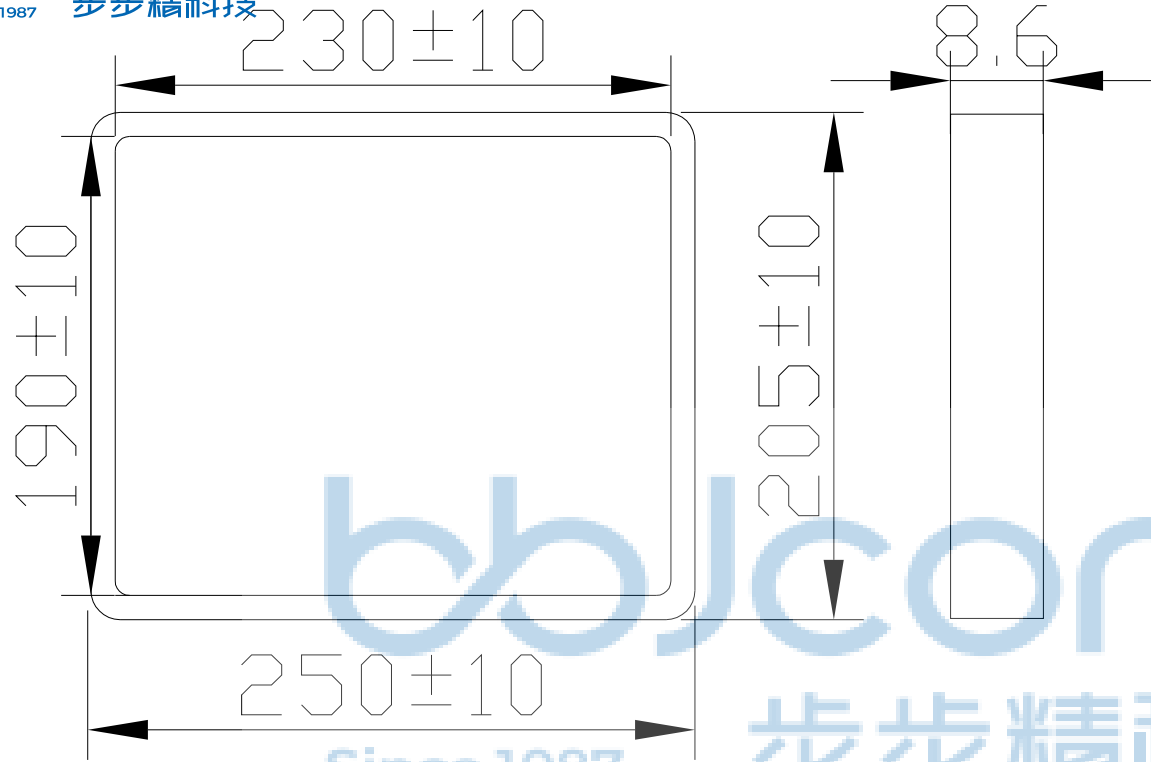

纸箱规格: 350*210*290

1. 包装要求:

- 1.1 每盒吸塑盒包装100 pcs;
- 1.2 每40盘放一箱, 共计4000PCS;
- 1.3 纸箱外贴上标签

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG:NO: 0062-1		深圳市步步精科技有限公司					
		.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3" .X*: ±2" .XX*: ±1"		NAME: Mini-Din MDC-9-04	
	APPD.	JM_Zheng			PJ. NO.: 168-205-090001-M5G		
	CHKD.	LYX			SIZE: A4 DRW NO.:		
				FINISH: SEE NOTES		MAT'L.: SEE NOTES	
			SCALE: N/A REV.: A0		UNIT: mm	PAGE: 2/2	