

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release		LYX

SPECIFICATION

A: MATERIAL:




- 1.HOUSING: PC(BLACK), UL 94V-0
- 2.PIN & TERMINAL: COPPER ALLOY, TIN PLATED

B: CHARACTERISTICS:





1. RATING: 2.5A 250V~ VDE,KC,CCC
2.5A 250V~ & 7A 125V~ UL
2. INSULATION RESISTANCE: 100MΩ MIN, AT 500V DC
3. ELECTRIC STRENGTH: AC 2000V FOR ONE MINUTE

C: APPROVALS:


UL, CUL, VDE, KC & CCC

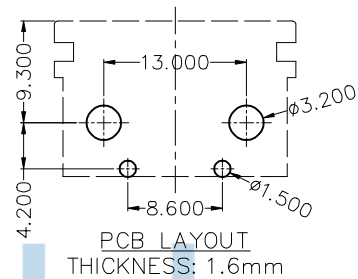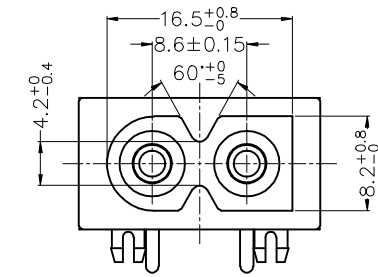

MARK

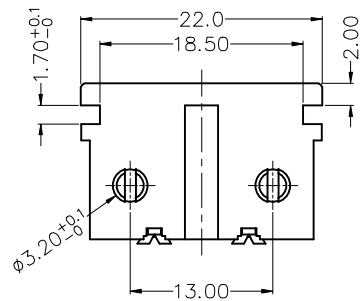

PANEL CUT-OUT

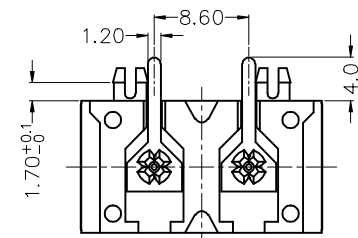


Certificate No.	
UL & CUL	E340249
VDE	40032611
CCC	2016010204834635
KC	SU04162-13002


THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd.	
Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.	
PDWG,NO:	0004-1

.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3' .X*: ±2' .XX*: ±1'		NAME: AC座 HC-88-02A3B16R-P05 袋装	
APPD.	JM_Zheng	PJ. NO.: AC.01.11-21-0001		SIZE: A4 DRW NO.:	
CHKD.	TSP	FINISH: SEE NOTES		MAT'L.: SEE NOTES	
DR.	LYX	SCALE: N/A		REV.: A0	
		UNIT: mm		PAGE: 1/2	

PE袋规格: 260*185

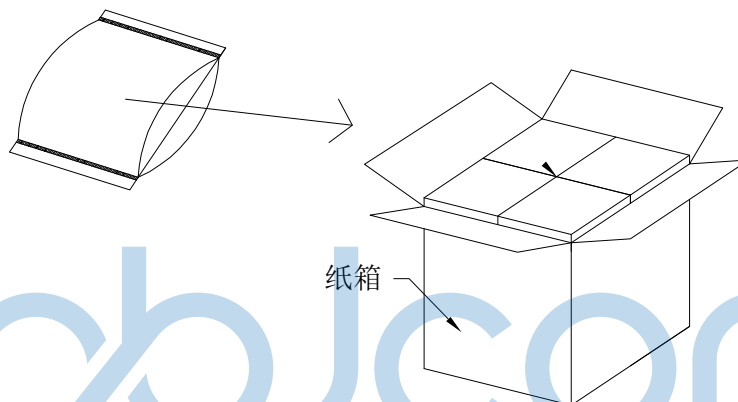

成品标签



1. 包装要求:

- 1.1 每个PE袋包装400pcs
- 1.2 每1袋放一小纸盒;
- 1.3 每20个小纸盒放一个纸箱, 共计8000pcs;
- 1.4 纸箱外贴上标签



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13		NAME: AC座 HC-88-02A3B16R-P05 袋装	
APPD.	JM_Zheng	PJ. NO.: AC.01.11-21-0001	
CHKD.	TSP	SIZE: A4 DRW NO.:	
PDWG.NO:	0004-1	FINISH: SEE NOTES MAT'L.: SEE NOTES	
DR.	LYX	SCALE: N/A REV.: A3 UNIT: mm PAGE: 2/2	