
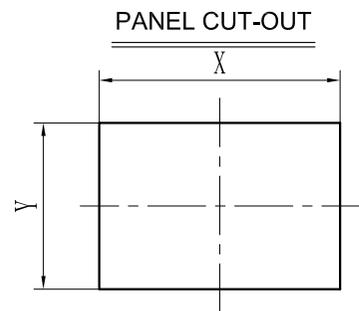




REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

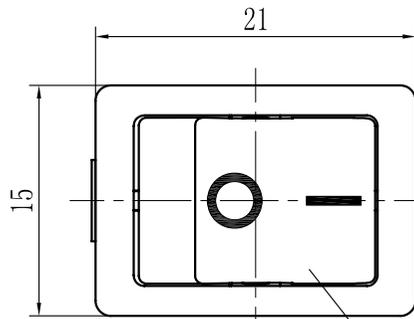



Technical requirements:

- Rating :
 - CQC : 6 (4)A 125/250V~
 - VDE, ENEC : 6 (4)A 250V~
 - UL , cUL : 10(6) A 125/250V~
 - TV-5
- Operating force: 800±400gf
- Contact resistance: ≤50mΩ
- Electrical life: ≥10000 cycles
- Withstand Voltage :Between all terminals: 1500VAC (50-60Hz)1min
Terminals to Button: 3000V AC (50-60Hz)1min
Leakage Current : 20mA
- Insulation Resistance : ≥100MΩ 500V DC
- Environmental temperature: : -25~+125°C
- Materials
 - ①Housing&Cap: PA (Black) UL 94V-0
 - ②Terminal:Copper alloy Ag plated
 - ③Contactor:AgCd012/Cu

Black

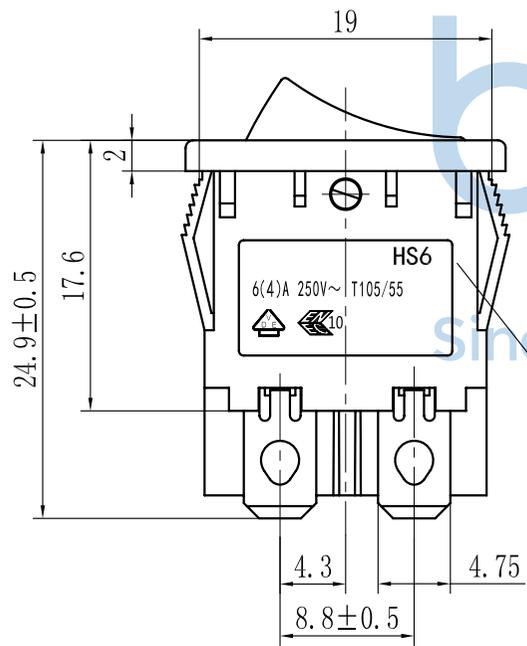

Black

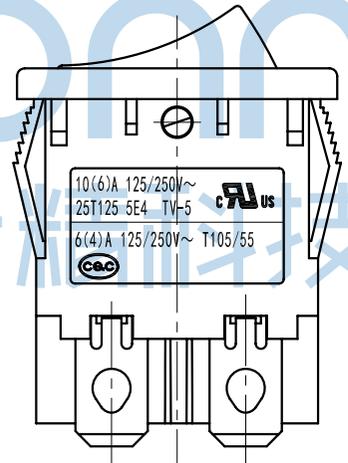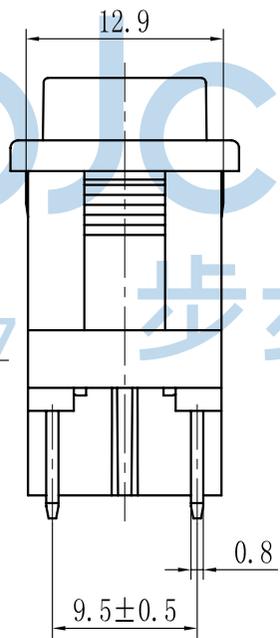


PANEL THICKNESS	DIM.X	DIM.Y
0.75~1.25	19.0~19.2	13.0
1.25~2.0	19.3~19.5	13.0
2.0~3.0	19.6~19.8	13.0




THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 NAME: 船型开关 HS6-F5-6-04Q100-BB03 四脚直插	
APPD. JM_Zheng	CHKD. LYX	DR. TSP	PJ. NO.: RS.17.11-22-2002 SIZE: A4 DRW NO.: FINISH: SEE NOTES MAT'L.: SEE NOTES SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2
PDWG.NO: 0004-1			

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

PE袋规格: 260*185

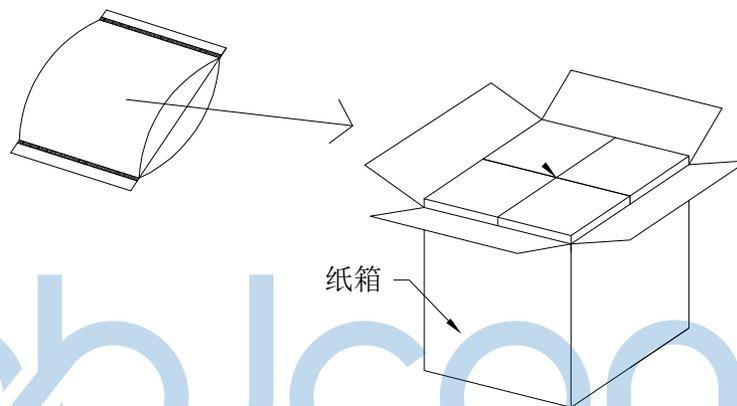

成品标签



1. 包装要求:

- 1.1 每个PE袋包装300pcs;
- 1.2 每1袋放一小纸盒;
- 1.3 每20个小纸盒放一个纸箱, 共计6000pcs;
- 1.4 纸箱外贴上标签



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd.		深圳市步步精科技有限公司	
Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		NAME: 船型开关 HS6-F5-6-04Q100-BB03 四脚直插	
PDWG.NO: 0004-1	DR. TSP	APPD. JM_Zheng	PJ. NO.: RS.17.11-22-2002
		CHKD. LYX	SIZE: A4 DRW NO.:
			FINISH: SEE NOTES MAT'L.: SEE NOTES
			SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2