

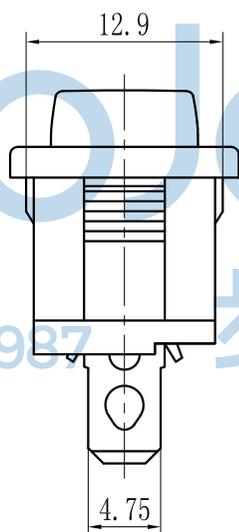
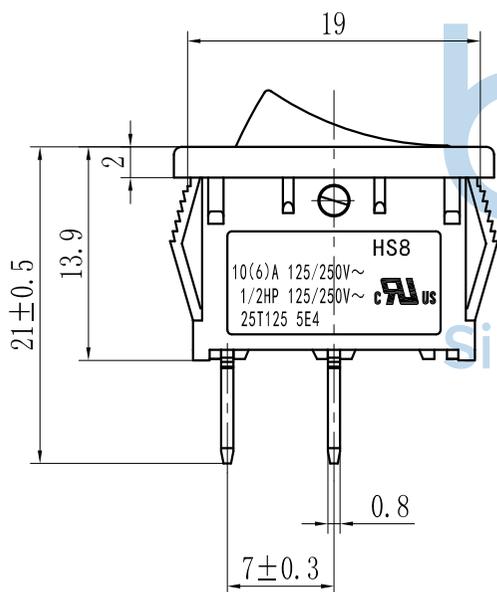




REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

Technical requirements:

- Rating :
 - CQC: 6(4) A 125/250V~
 - VDE,ENEC: 6(4) A 250V~
 - UL ,cUL : 10(6) A 125/250V~
 - 1/2HP 125/250V~
- Operating force: 650±350gf
- Contact resistance: ≤50mΩ
- Electrical life: ≥10000 cycles
- Withstand Voltage :Between all terminals:
 - 1500VAC (50-60Hz) 5s
 - Terminals to Button:
 - 3000V AC (50-60Hz) 5s
 - Leakage Current : 5mA
- Insulation Resistance : ≥100MΩ 500V DC
- Environmental temperature: -25~+125°C

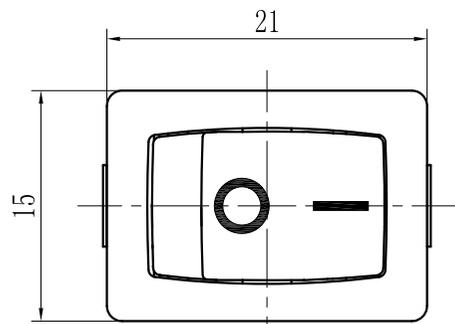

PANEL CUT-OUT

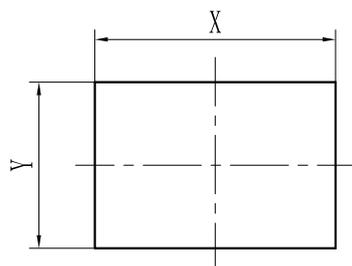


PANEL THICKNESS	DIM.X	DIM.Y
0.75~1.25	19.0~19.2	13.0
1.25~2.0	19.3~19.5	13.0
2.0~3.0	19.6~19.8	13.0


THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG.NO: 0004-1	深圳市步步精科技有限公司		NAME: 船型开关 HS8-F1-6-01Q100-BB03 两脚直插 袋装	
	.X: ±0.38	X': ±3'	PJ. NO.:RS.17.11-22-2008	
	.XX: ±0.25	.X': ±2'	SIZE: A4 DRW NO.:	
	.XXX: ±0.13	.XX': ±1'	FINISH: SEE NOTES MAT'L.: SEE NOTES	
	APPD. JM_Zheng	DR. TSP		SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

PE袋规格: 260*185

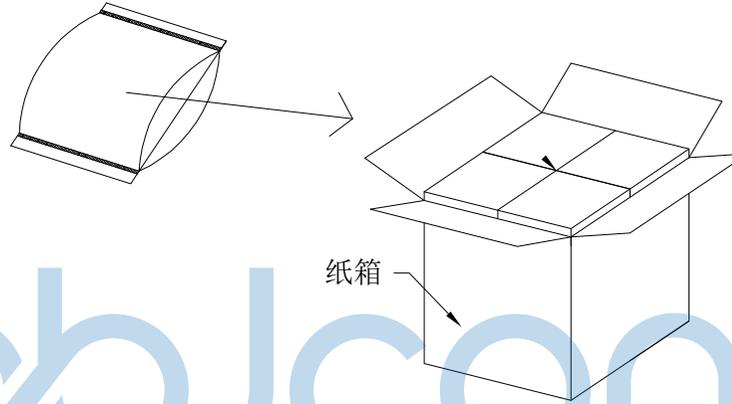

成品标签



1. 包装要求:

- 1.1 每PE袋包装300pcs;
- 1.2 每1袋放一小纸盒;
- 1.3 每20个小纸盒放一个纸箱, 共计6000PCS
- 1.4 纸箱外贴上标签



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 .X: ±0.38 X': ±3" .XX: ±0.25 .X": ±2" .XXX: ±0.13 .XX": ±1"		NAME: 船型开关 HS8-F1-6-01Q100-BB03 两脚直插 袋装 PJ. NO.: RS.17.11-22-2008 SIZE: A4 DRW NO.: FINISH: SEE NOTES MAT'L.: SEE NOTES SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	
APPD.	JM_Zheng				
CHKD.	LYX				
PDWG.NO:	0004-1	DR.	TSP		