


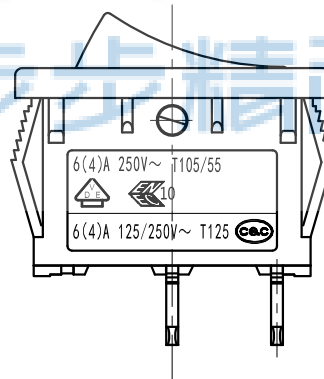
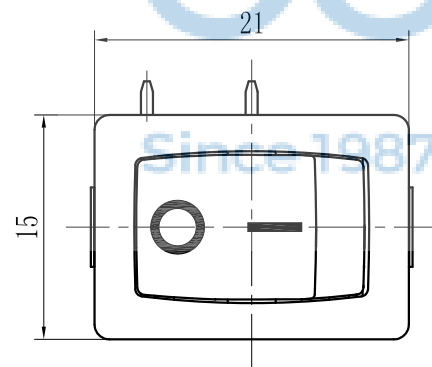
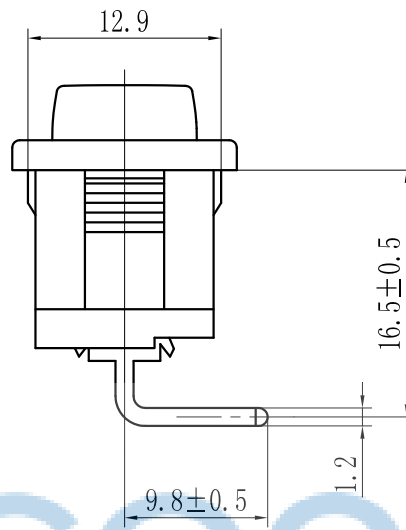


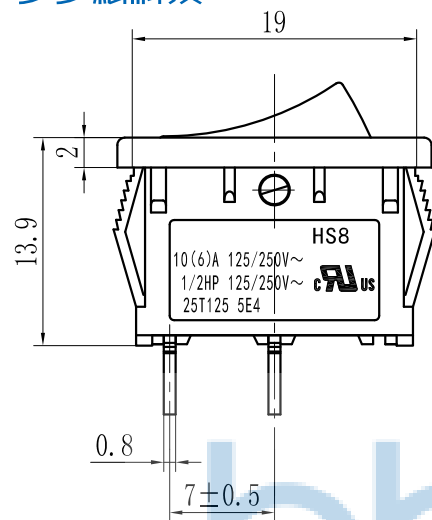


SWITCHING CIRCUIT



PANEL CUT-OUT



PCB LAYOUT



Technical requirements:

1. Rating :

CQC: 6(4) A 125/250V~
VDE,ENEC: 6(4) A 250V~
UL, cUL : 10(6) A 125/250V~
1/2HP 125/250V~

2. Operating force: 650±350gf

3. Contact resistance: ≤50mΩ

4. Electrical life: ≥10000 cycles

5. Withstand Voltage :Between all terminals:
1500VAC (50-60Hz) 5s
Terminals to Button:
3000V AC (50-60Hz) 5s
Leakage Current : 5mA




6. Insulation Resistance : ≥100MΩ 500V DC

7. Environmental temperature: : -25~+125℃



PANEL THICKNESS	DIM.X	DIM.Y
0.75~1.25	19.0~19.2	13.0
1.25~2.0	19.3~19.5	13.0
2.0~3.0	19.6~19.8	13.0

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.				深圳市步步精科技有限公司			
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		.X': ±3' .X': ±2' .XX': ±1'		NAME: 船型开关 HS8-F1-6-01P200-BB03 两脚右弯			
APPD. JM_Zheng		CHKD. LYX		PJ. NO.: RS.17.11-22-2011			
DR. SGF		PDWG.NO: 0004-1		SIZE: A4 DRW NO.:			
				FINISH: SEE NOTES MAT'L.: SEE NOTES			
				SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2			

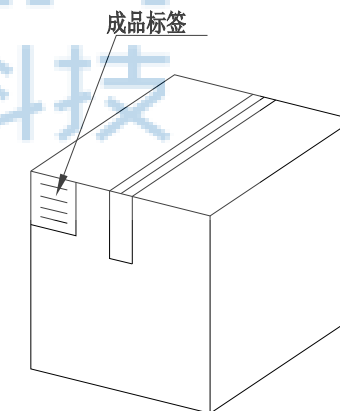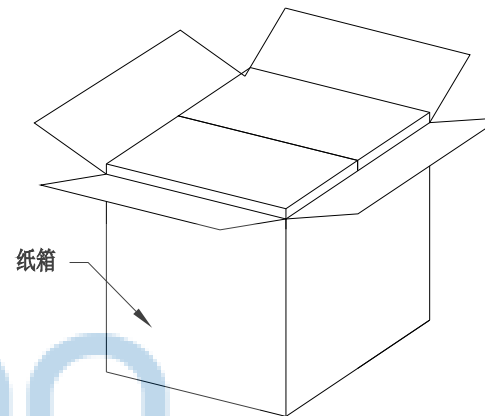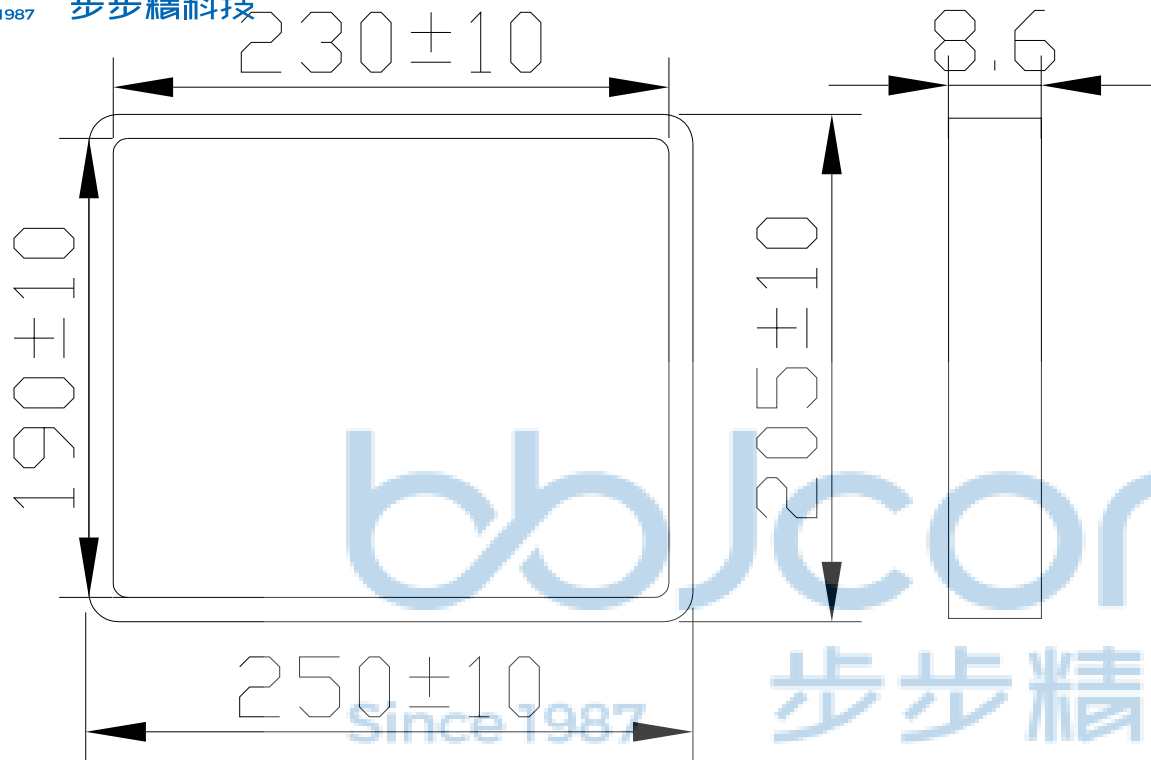

1. 包装要求:

- 1.1 每盒吸塑盒包装100pcs;
- 1.2 每20盘放一箱, 共计2000PCS;
- 1.3 纸箱外贴上标签



纸箱规格: 350*210*290

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
PDWG.NO: 0004-1		NAME: 船型开关 HS8-F1-6-01P200-BB03 两脚右弯	
APPD. JM_Zheng	CHKD. LYX	PJ. NO.: RS.17.11-22-2011	
DR. SGF		SIZE: A4	DRW NO.:
		FINISH: SEE NOTES	MAT'L.: SEE NOTES
		SCALE: N/A	REV.: A0
		UNIT: mm	PAGE: 2/2