


REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	SGF

**ELECTRICAL CHARACTERISTICS**


1. RATING: DC 30V 0.1A
2. CONTACT RESISTANCE: 100mΩ MAX
3. INSULATION RESISTANCE: 100MΩ MIN
4. DIELECTRIC STRENGTH: AC 250V (50~60Hz) /60S

**MECHANICAL CHARACTERISTICS**

1. PRACTICAL TEMPERATURE RANG: -40°C ~ +85°C
2. OPERATING FORCE: 250 ± 50gf
3. MECHANICAL LIFE: 20,000 cycles

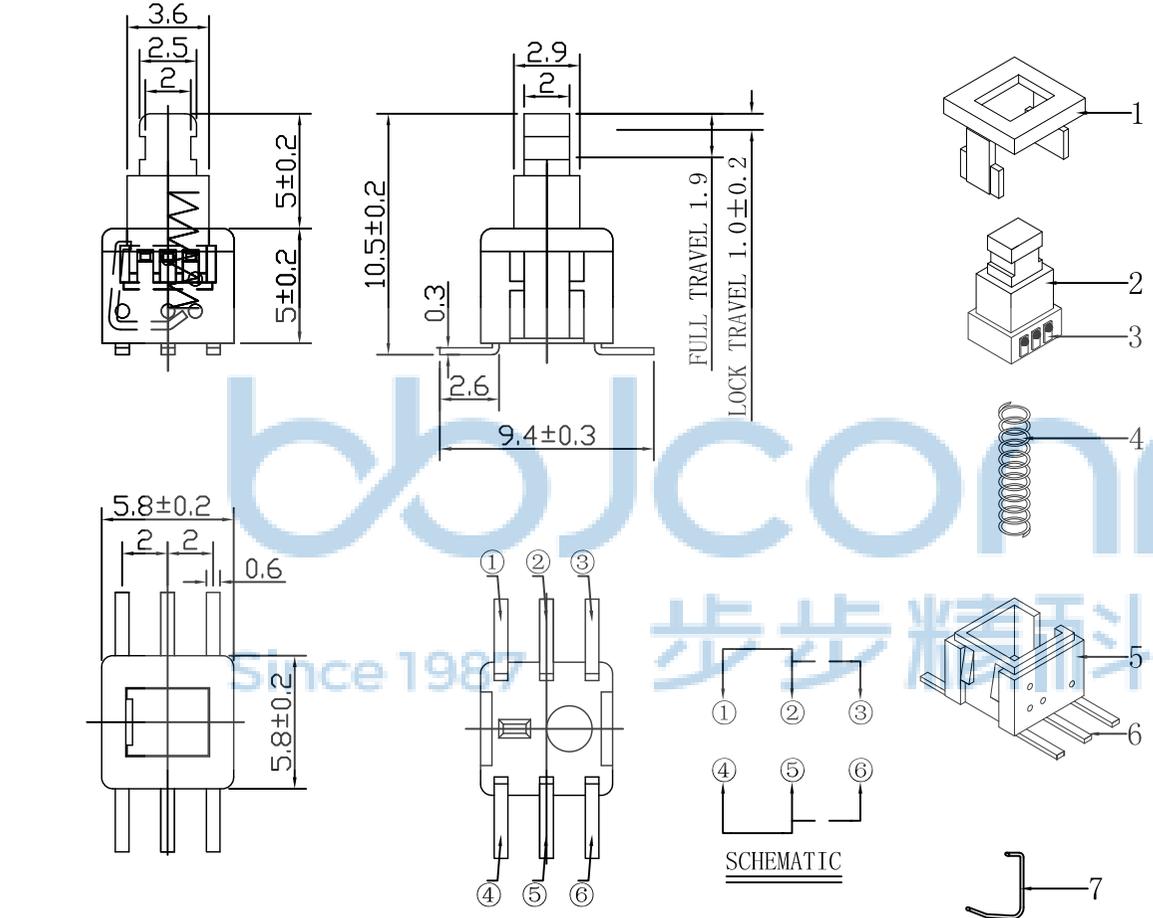

NO.	PART NAME	MATERIAL	QTY.	FINISHING
8				
7	LOCK PIN	SUS WIRE	1	NATURAL
6	TERMINAL	BRASS	6	Ag PLATED
5	CASE	PPA	1	GRAY
4	SPRING	SUS WIRE	1	NATURAL
3	CONTACT	BRONZE	2	Ag PLATED
2	KNOB	PPA	1	WHITE
1	COVER	PPA	1	BLACK

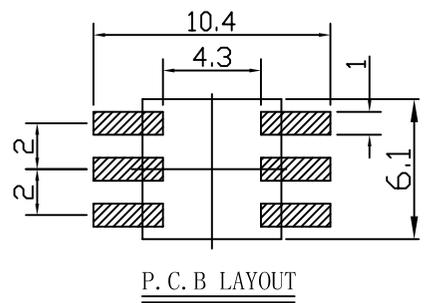

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.

PDWG.NO: 0005-1

DR. SGF

APPD. JM\_Zheng

CHKD. LYX

NAME: 按键开关 5.8x5.8x10 自锁 六脚贴片 方头 白黑灰 (PB60L250S2.6 全PPA)


PJ. NO.: PS.01.01-04-2005

SIZE: A4 DRW NO.:

FINISH: SEE NOTES MAT'L.: SEE NOTES

SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2

**深圳市步步精科技有限公司**

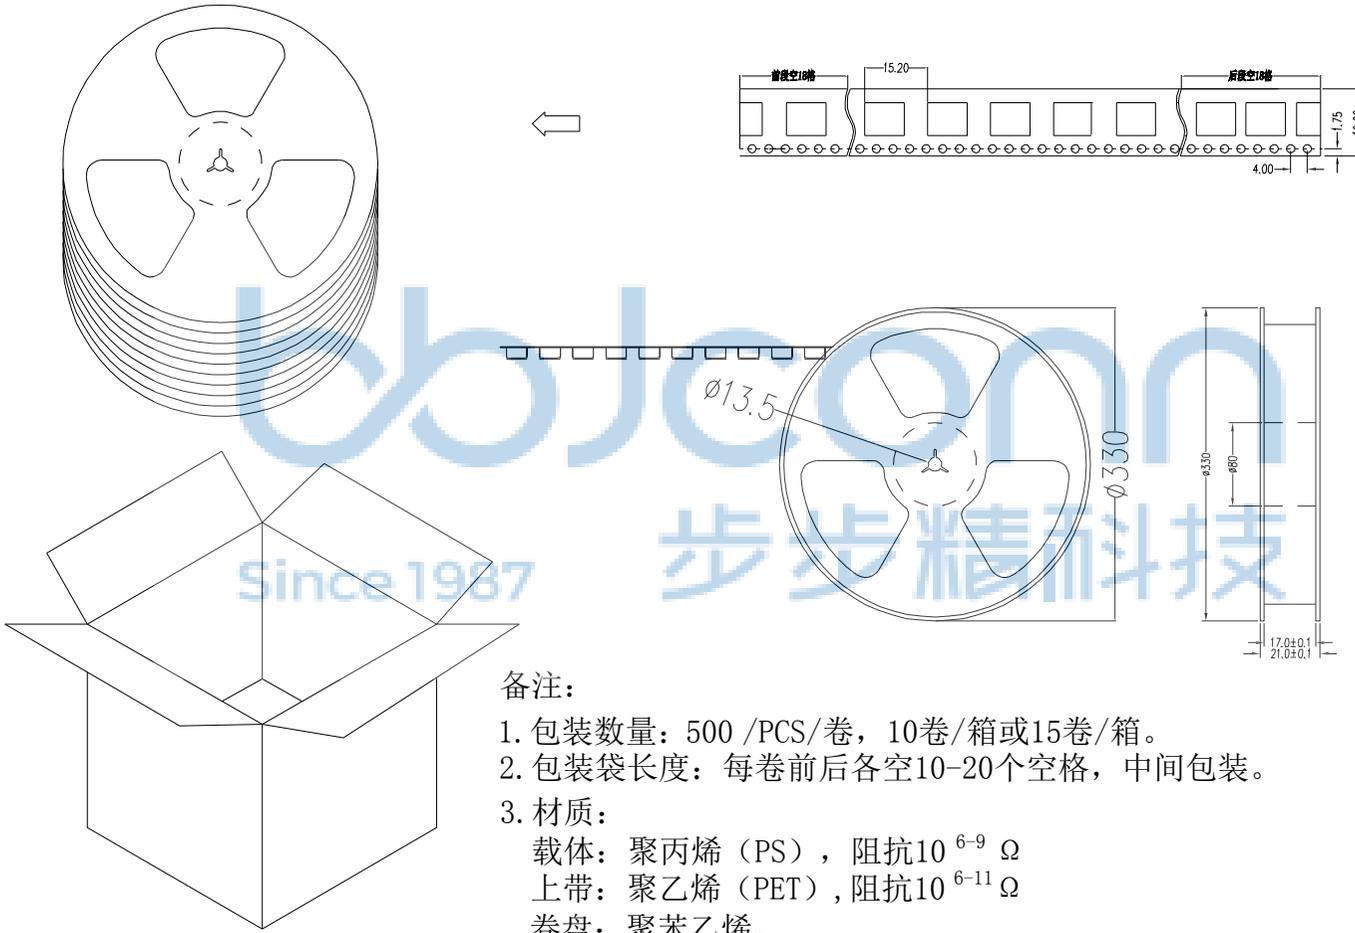

备注:

1. 包装数量: 500 /PCS/卷, 10卷/箱或15卷/箱。
2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
3. 材质:  
载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$   
上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$   
卷盘: 聚苯乙烯。

纸箱规格: 345\*345\*23MM  
纸箱规格: 345\*345\*35MM

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X': ±3" .X': ±2" .XX': ±1"	
APPD.	JM_Zheng	NAME: 按键开关 5.8x5.8x10 自锁 六脚贴片 方头 白黑灰 (PB60L250S2.6 全PPA)	
CHKD.	LYX	PJ. NO.: PS.01.01-04-2005	
DR.	SGF	SIZE: A4 DRW NO.:	
PDWG.NO: 0005-1		FINISH: SEE NOTES MAT'L.: SEE NOTES	
		SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	