



REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	SGF

ELECTRICAL CHARACTERISTICS






1. RATING: DC 30V 0.1A
2. CONTACT RESISTANCE: 100mΩ MAX
3. INSULATION RESISTANCE: 100MΩ MIN
4. DIELECTRIC STRENGTH: AC 250V (50~60Hz) /60S

MECHANICAL CHARACTERISTICS

1. PRACTICAL TEMPERATURE RANG: -40℃~+85℃
2. OPERATING FORCE: 250±50gf
3. MECHANICAL LIFE: 20,000 cycles

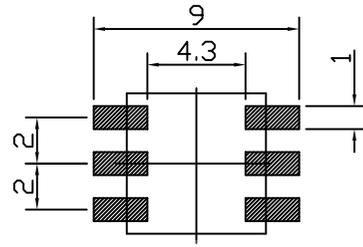

P. C. B LAYOUT

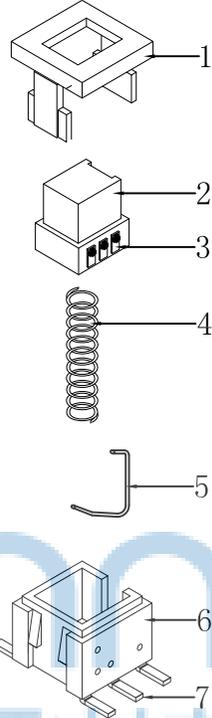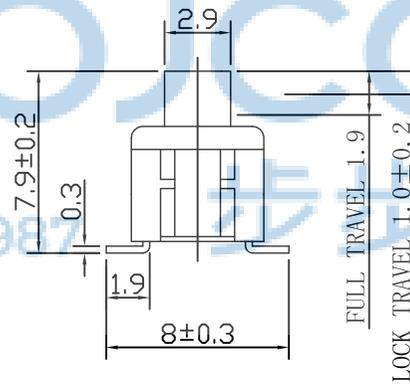

SCHMATIC



8				
7	TERMINAL	BRASS	6	Ag PLATED
6	CASE	PPA	1	GRAY
5	LOCK PIN	SUS WIRE	1	NATURAL
4	SPRING	SUS WIRE	1	NATURAL
3	CONTACT	BRONZE	2	Ag PLATED
2	KNOB	PPA	1	WHITE
1	COVER	PPA	1	BLACK
NO.	PART NAME	MATERIAL	QTY.	FINISHING

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.


PDWG.NO: 0005-1

APPD. JM_Zheng
CHKD. LYX
DR. SGF

NAME: 深圳市步步精科技有限公司
按钮开关 5.8x5.8 自锁开关 白黑灰 六脚贴片 平头 PPA 250G

PJ. NO.: PS.01.02-04-2001
SIZE: A4 DRW NO.:
FINISH: SEE NOTES MAT'L.: SEE NOTES
SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	SGF

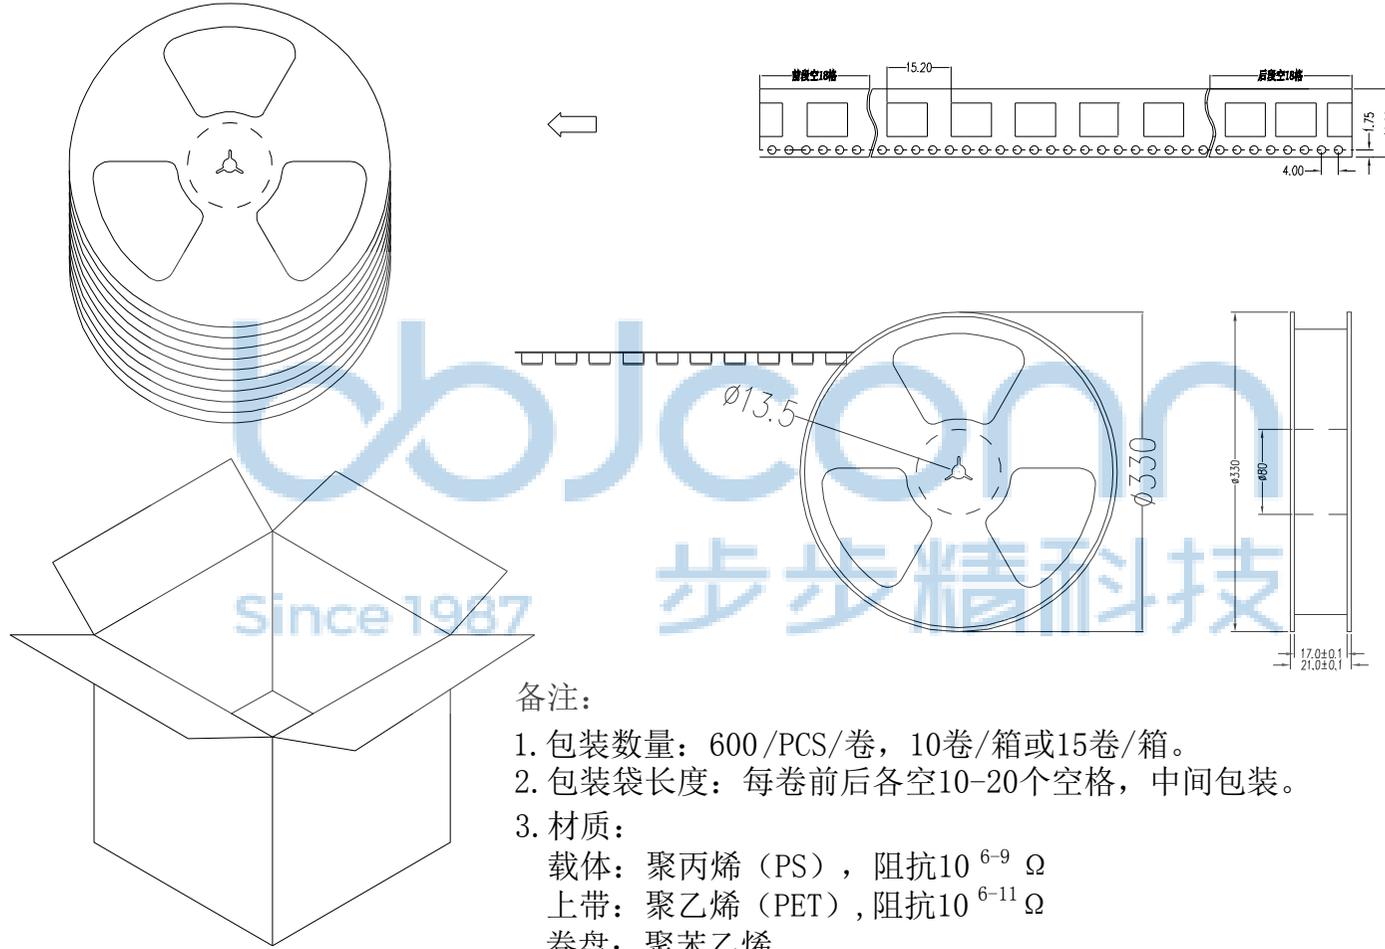

- 备注:
1. 包装数量: 600/PCS/卷, 10卷/箱或15卷/箱。
 2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
 3. 材质:
载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
卷盘: 聚苯乙烯。

纸箱规格: 345*345*23MM
纸箱规格: 345*345*35MM

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		 深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3" .X*: ±2" .XX*: ±1"	
APPD.	JM_Zheng	NAME: 按键开关 5.8x5.8 自锁开关 白黑灰 六脚贴片 平头 PPA 250C	
CHKD.	LYX	PJ. NO.: PS.01.02-04-2001	
DR.	SGF	SIZE: A4 DRW NO.:	
PDWG.NO: 0005-1		FINISH: SEE NOTES MAT'L.: SEE NOTES	
		SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	