







REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP




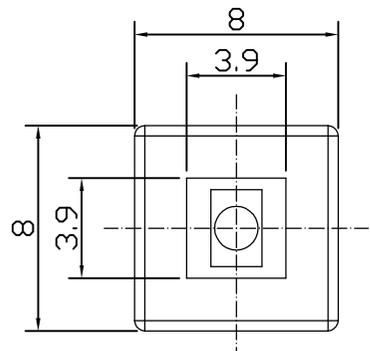


ELECTRICAL CHARACTERISTICS

1. RATING: DC 30V 0.1A
2. CONTACT RESISTANCE: 100mΩ MAX
3. INSULATION RESISTANCE: 100MΩ MIN
4. DIELECTRIC STRENGTH: AC 250V(50~60Hz)/60S

MECHANICAL CHARACTERISTICS

1. PRACTICAL TEMPERATURE RANG: -40°C~+85°C
2. OPERATING FORCE: 250±50gf
3. MECHANICAL LIFE: 30,000 cycles

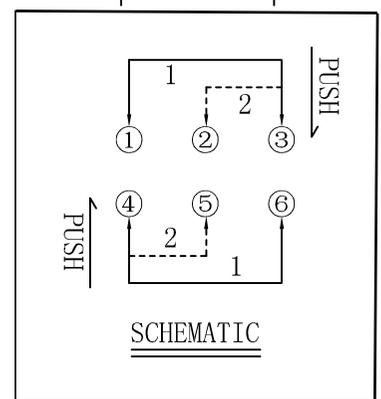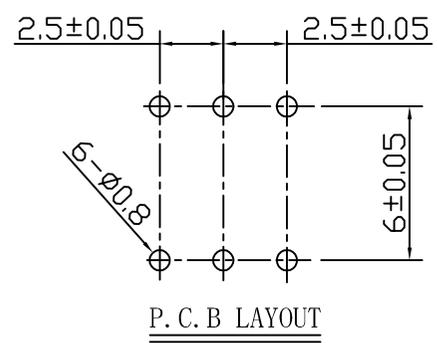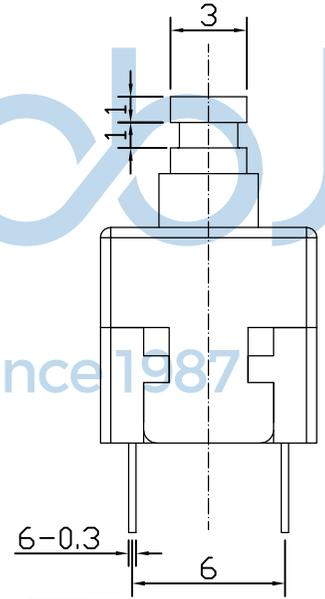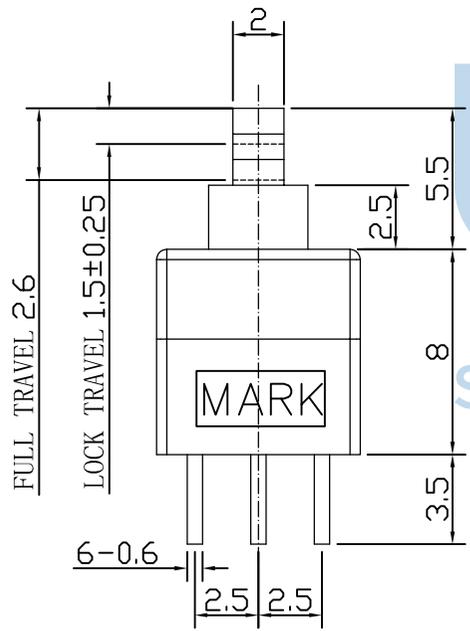


8			
7			
6	TERMINAL	BRASS	6 Ag PLATED
5	CASE	PPA	1 BLACK
4	SPRING	SUS	1 NATURAL
3	CONTACT	BRONZE	2 Ag PLATED
2	BUTTON	PPA	1 WHITE
1	COVER	PPA	1 WHITE
NO. DESCRIPTION		MATERIAL	QTY PLATING




THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 NAME: 按键开关 PB80N250 8x8 无锁 六脚插 全PPA 袋装 APPD. JM_Zheng CHKD. LYX DR. TSP PDWG.NO: 0005-1	
.X: ±0.38	X': ±3'	PJ. NO.: PS.03.03-14-2001	
.XX: ±0.25	.X': ±2'	SIZE: A4 DRW NO.:	
.XXX: ±0.13	.XX': ±1'	FINISH: SEE NOTES MAT'L.: SEE NOTES	
SCALE: N/A		REV.: A0	UNIT: mm PAGE: 1/2

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

PE袋规格: 260*185

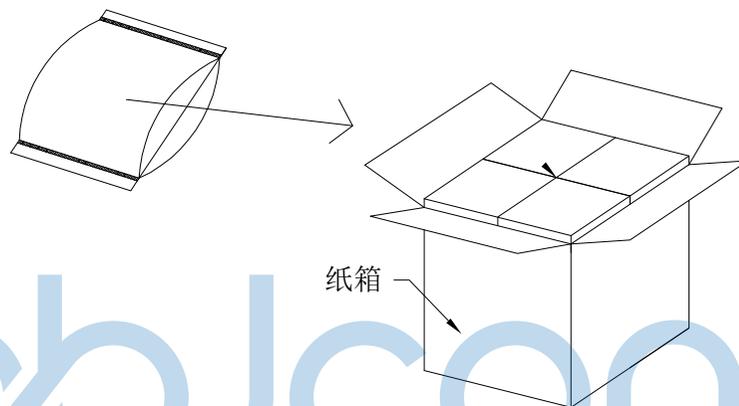

成品标签



1. 包装要求:

- 1.1 每个PE袋包装800pcs;
- 1.2 每1袋放一小纸盒;
- 1.3 每20个小纸盒放一个纸箱, 共计16000pcs;
- 1.4 纸箱外贴上标签



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 .X: ±0.38 .X': ±3" .XX: ±0.25 .X'': ±2" .XXX: ±0.13 .XX': ±1"		NAME: 按键开关 PB80N250 8x8 无锁 六脚插 全PPA 袋装 PJ. NO.: PS.03.03-14-2001 SIZE: A4 DRW NO.: FINISH: SEE NOTES MAT'L.: SEE NOTES SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	
APPD.	JM_Zheng				
CHKD.	LYX				
PDWG.NO:	0005-1	DR.	TSP		