




REV.	ECN NO.	CONTENT	DATE	ENGINEER
AO				

Specification:

1. Rating: DC 30V 100mA;
2. Contact Resistance: 200m Ω Max;
3. Insulation Resistance: 100M Ω Min;
4. Withstand Voltage: AC250V(50-60Hz) For 1 Minute;
5. Operation Force: 250 $\pm$ 50gf;
6. Life Test: 10000 Cycles(without load);
7. Total Travel: 2.2 $\pm$ 0.15mm;
8. Work Style: Self-Lock .

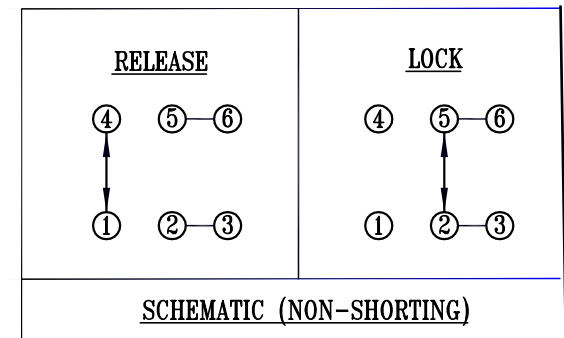

常态: ①与④导通, ②与③导通, ⑤与⑥导通,
其余端子相互之间断开;

按下: ②、③、⑤、⑥4个端子导通,
其余端子相互之间断开。


8				
7				
6				
5	SPRING	SUS	1	NATURAL
4	CAM STICK	SUS	1	NATURAL
3	CASE	PPA100AG7HL(无卤全新料)/BRASS STRIP	1	BLACK/Ag PLATED
2	COVER	PPA100AG7HL(无卤全新料)	1	GREY
1	KNOB	PPA100AG7HL(无卤全新料)/PBS C5210R-EH	1	WHITE/Ag CLAD
NO.	PARTS	MATERIALS	Q'TY	FINISH

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION


PDWG,NO: 0101-1

 深圳市步步精科技有限公司			
.X: ± 0.38 .X': $\pm 3'$.XX: ± 0.25 .X': $\pm 2'$.XXX: ± 0.13 .X': $\pm 1'$		NAME: 按键开关 PB22E77 侧插 5.8x5.8x10.1 自锁 六脚插	
APPD.	JM_Zheng		PJ. NO.: 104-010-040001-T5G
CHKD.	LYX		SIZE: A4 DRW NO.:
DR.	TSP	FINISH: SEE NOTES	MAT'L.: SEE NOTES
		SCALE: N/A	REV: A0 UNIT: mm PAGE: 1/2

PE袋规格: 260*185

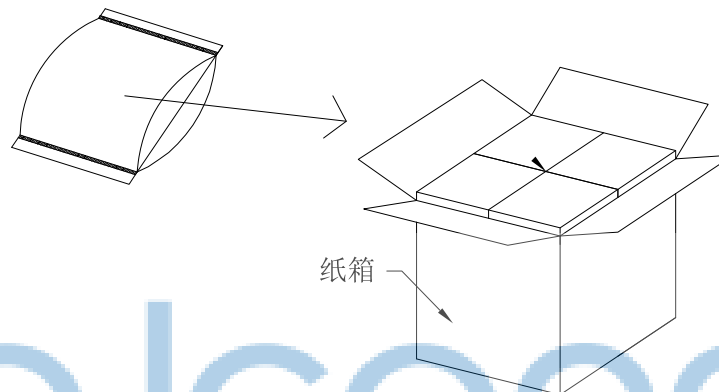

成品标签



1. 包装要求:

- 1.1 每个PE袋包装2000PCS;
- 1.2 每1袋放一小纸盒;
- 1.3 每20个小纸盒放一个纸箱, 共计40000PCS ;
- 1.4 纸箱外贴上标签



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG.NO: 0101-1		深圳市步步精科技有限公司						
		.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X': ±3" X": ±2" XX': ±1"		NAME: 按键开关 PB22E77 侧插 5.8x5.8x10.1 自锁 六脚插		
	APPD.	JM_Zheng			PJ. NO.: 104-010-040001-T5G			
	CHKD.	LYX			SIZE: A4 DRW NO.:			
					FINISH: SEE NOTES		MAT'L.: SEE NOTES	
					SCALE: N/A REV.: A0		UNIT: mm	PAGE: 2 / 2