


技术参数:

1. 做用温度: -25~+85°C;
2. 额定负荷: DC 12V 50mA;
3. 接触电阻: ≤50mΩ;
4. 绝缘电阻: ≥100MΩ;
5. 耐压: AC250V(50Hz)/min;
6. 动作力: 160 /260GF ±50g;
7. 使用寿命: 100000次;

B	13.85	15.0	Ø3.0
11.85	13.0	Ø3.0	
8.35	9.5	Ø3.1	
7.85	9.0	Ø3.2	
7.35	8.5	Ø3.2	
6.35	7.5	Ø3.3	
5.35	6.5	Ø3.3	
4.85	6.0	Ø3.3	
3.85	5.0	Ø3.5	
3.15	4.3	Ø3.5	
高度L(mm)		帽头H(mm)	
		直径A(mm)	




6	机架	1	冷轧钢带	Cu/Sn
5	嵌件	1	H62Y 黄铜 T=0.30	Ag
4	底座	1	PPA	黑
3	簧片	1	不锈钢/复合银	Ag
2	盖板	1	冷轧钢带	Cu/Sn
1	按钮	1	PPA	黑
序号	名称	数量	材料	镀层/颜色
				备注

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. CORPORATION AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.	NAME: 轻触开关 6x6x8.5 飞机架 不锈钢弹片 160GF
.X: ±0.38	X: ±3'
.XX: ±0.25	X: ±2'
.XXX: ±0.13	XX: ±1'
APPD. JM_Zheng	P.J. NO.: TS_01.20-B2-31-01
CHKD. LYX	SIZE: A4 DRW NO.:
PDWG.NO: 0013-1	FINISH: SEE NOTES MAT'L.: SEE NOTES
DR. LHC	SCALE: N/A REV.: AO UNIT: mm PAGE: 1/2



电路图

PE袋规格: 260*185

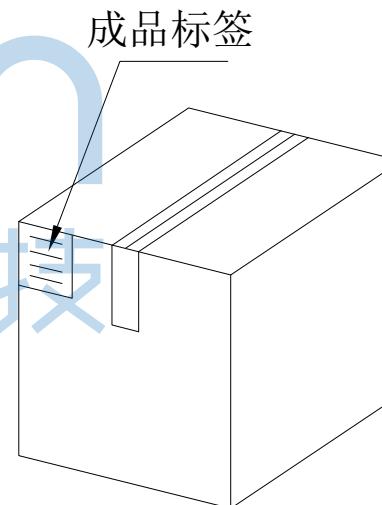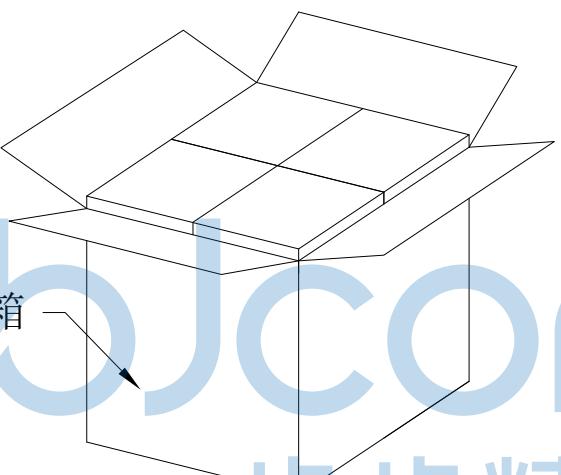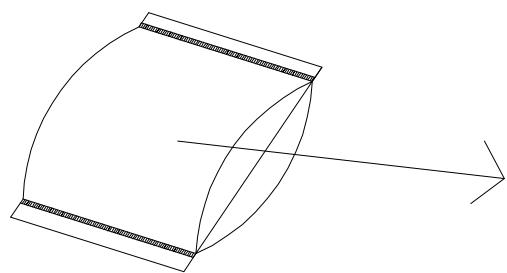

1. 包装要求:

- 1.1 每个PE袋包装 500 pcs ;
- 1.2 每1袋放一小纸盒;
- 1.3 每20个小纸盒放一个纸箱, 共计 10000 pcs ;
- 1.4 纸箱外贴上标签



THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0013-1

JM_Zheng
LYX
DR. LHC



深圳市步步精科技有限公司

.X: ±0.38	X: ±3'	NAME:
.XX: ±0.25	.X': ±2'	轻触开关 6x6x8.5 飞机架 不锈钢弹片 160GF
.XXX: ±0.13	.XX': ±1'	
APPD.	JM_Zheng	P.J. NO.: TS.01.20-B2-31-01
CHKD.	LYX	SIZE: A4 DRW NO.:
		FINISH: SEE NOTES MAT'L.: SEE NOTES
		SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2