

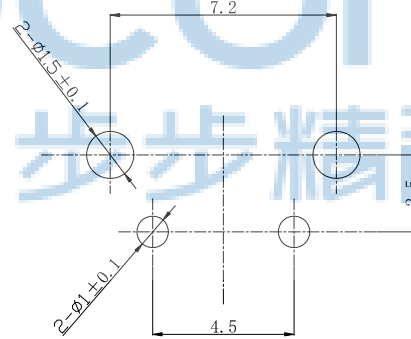
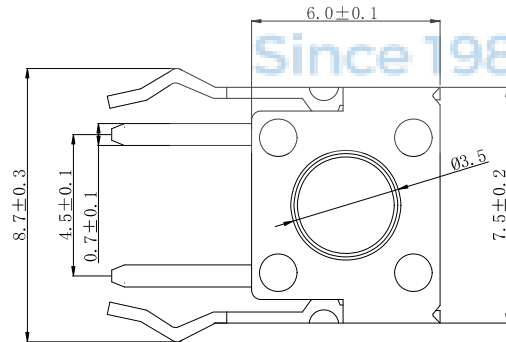
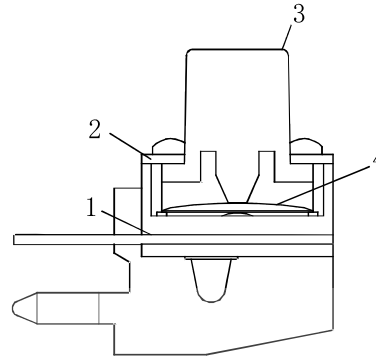


L=4.3~23

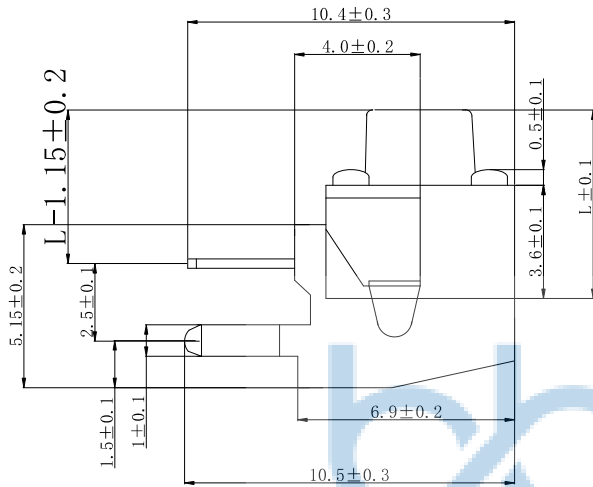

P. C. B. Land Pattern





Circuit Diagram

主要技术参数	1	操作行程	0.25±0.1mm
	2	额定电压、电流	DC12V/50mA
	3	接触电阻	30mΩ(max)
	4	绝缘电阻	100MΩ(min)
	5	耐 压	250V AC/1min
	6	动 作 力	100/160/260±30gf
	7	使用寿命	50000次
	8	尺 寸	未注公差均按 GB/T1804—2000

序号	名 称	数量	材 料	镀涂/颜色
1	底 座	1	0.3mm黄铜 与PPA	黑色与镀银
2	支 架	1	铁皮	镀铜锡
3	按 钮	1	PPA	黑色
4	弹 片	1	0.05mm 不锈钢	镀银/白色

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 .X: ±0.38 .X': ±3' .XX: ±0.25 .X': ±2' .XXX: ±0.13 .X': ±1'		NAME: 轻触开关 6x6x9 支架 不锈钢弹片 260G	
APPD.	JM_Zheng	PJ. NO.: TS.01.21-31-31-02		SIZE: A4 DRW NO.:	
CHKD.	LYX	FINISH: SEE NOTES		MAT'L.: SEE NOTES	
PDWG.NO:	0013-1	DR.	SGF	SCALE: N/A	REV.: A0 UNIT: mm PAGE: 1/2

PE袋规格:***X***($\text{O}\hat{\text{O}}\hat{\text{E}}\mu\frac{1}{4}\hat{\text{E}}^3\hat{\text{o}}\gg\hat{\text{o}}\hat{\text{I}}^{\text{a}}\times\frac{1}{4}$)

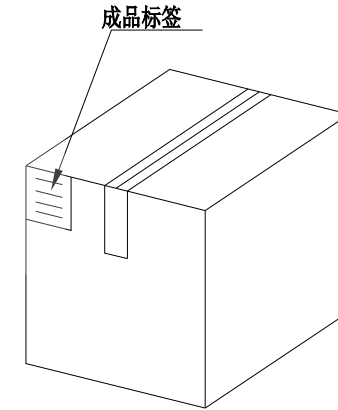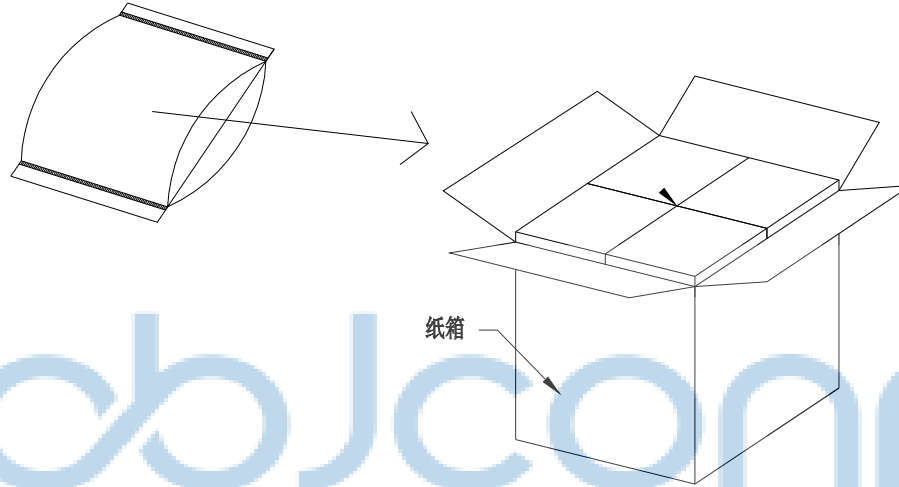

1. 包装要求:

- 1.1 每PE袋包装 1000pcs;
- 1.2 每1袋放一小纸盒;
- 1.3 每20个小纸盒放一个纸箱, 共计20000PCS
- 1.4 纸箱外贴上标签



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X*: ±3" .X*: ±2" .XX*: ±1"	NAME: ĆáŸçª1Ø 6x6x9 Ö§¼Ü ²»Đâ,Öµ¯Æ¬ 260G	
APPD.	JM_Zheng	PJ. NO.: TS.01.21-31-31-02	
CHKD.	LYX	SIZE: A4 DRW NO.:	
PDWG.NO: 0013-1	DR. SGF	FINISH: SEE NOTES MAT'L.: SEE NOTES	
		SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	