
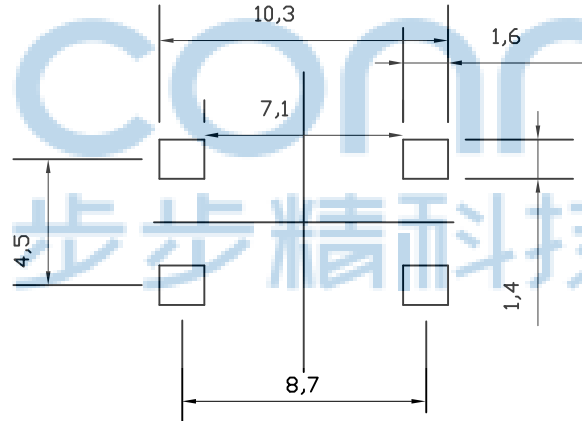
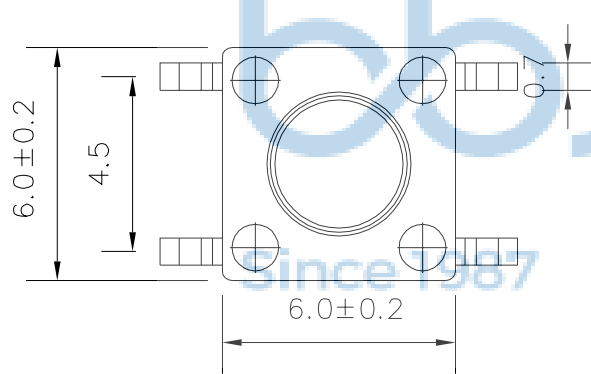



REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	SGF

主要技术参数	1	操作行程	0.25±0.1mm
	2	额定电压、电流	DC12V/50mA
	3	接触电阻	30mΩ(max)
	4	绝缘电阻	100MΩ(min)
	5	耐 压	250V AC/1min
	6	动 作 力	160/260 ± 30gf
	7	使用寿命	80000次
	8	尺 寸	未注公差均按 GB/T1804—2000

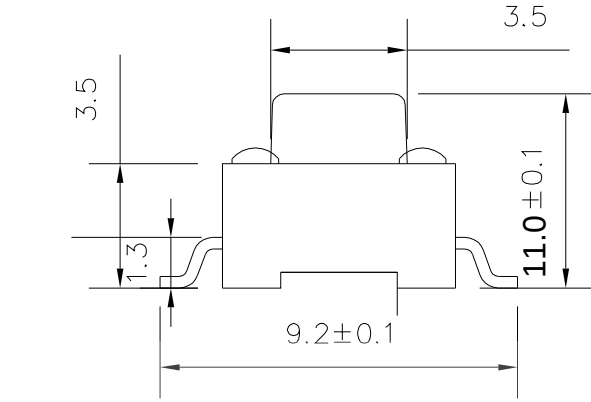

安装尺寸

4	弹片	1	不锈钢 SUS304	镀银/白色
3	按子	1	PPA	黑色
2	盖板	1	铁 SPCC	镀银/白色
1	底座	1	黄铜与 PPA (H65)	黑色与镀银
序号	名称	1	材料	镀涂/颜色




THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		PDWG.NO: 0013-1		DR. SGF		.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X': ±3' X'': ±2' XX': ±1'		NAME: 轻触开关 6x6x11 贴片 不锈钢弹片 260G 9.2脚		PJ. NO.: TS.01.25-11-11-03		SIZE: A4 DRW NO.:		FINISH: SEE NOTES MAT'L.: SEE NOTES		SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2	
--	--	-----------------	--	---------	--	----------------------------------	--	---------------------------	--	--------------------------------------	--	----------------------------	--	-------------------	--	-------------------------------------	--	--	--



深圳市步步精科技有限公司

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	SGF

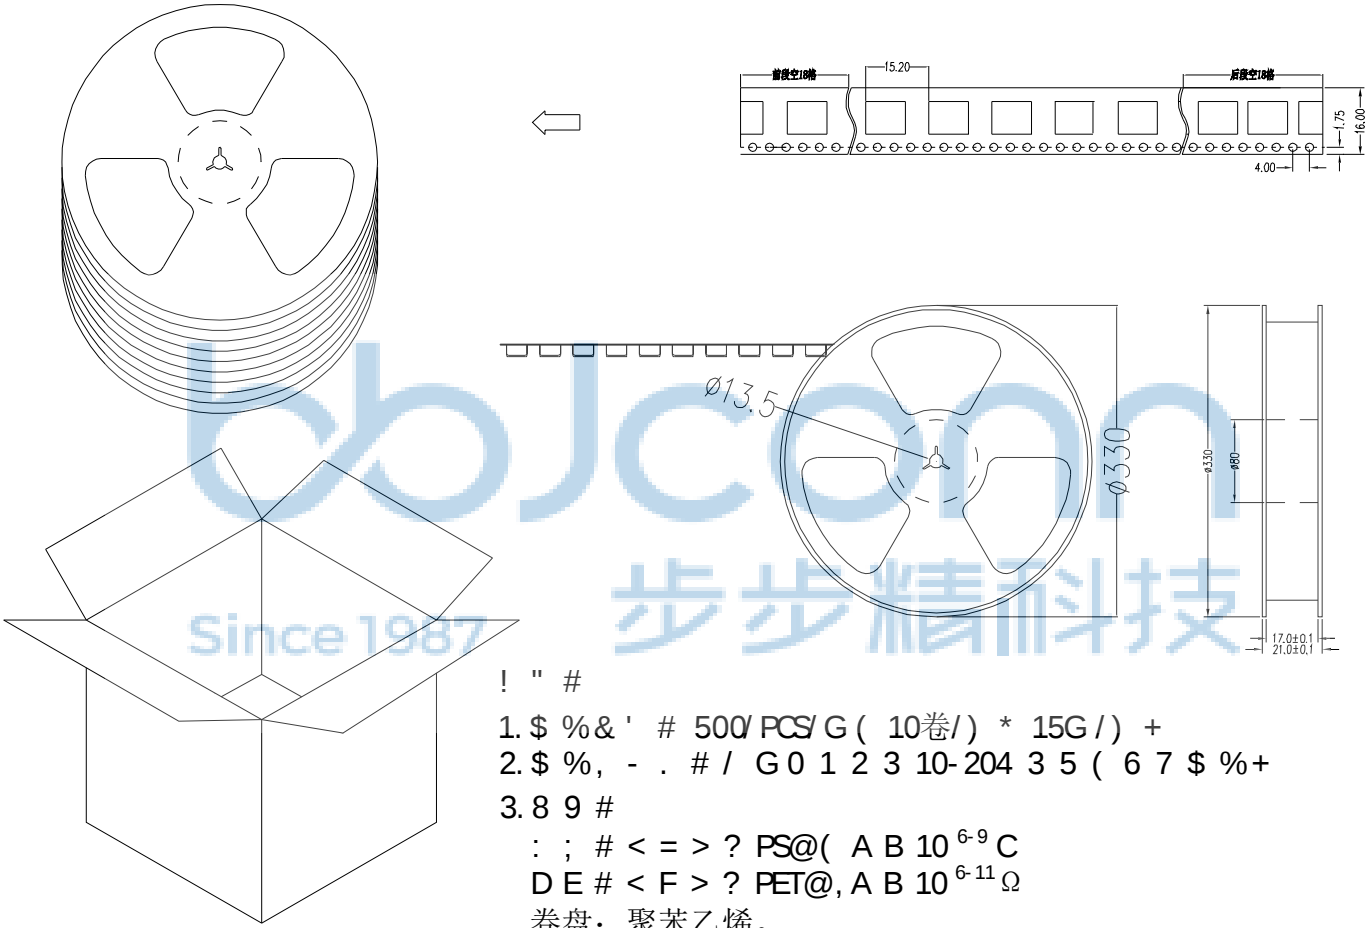

! " #
1. \$ % & ' # 500/PCS/G (10卷/) * 15G /) +
2. \$ % , - . # / G 0 1 2 3 10-204 3 5 (6 7 \$ % +
3. 8 9 #
: ; # < = > ? PS@ (A B 10⁶⁻⁹ C
D E # < F > ? PET@ , A B 10⁶⁻¹¹ Ω
卷盘: 聚苯乙烯。
纸箱规格: 345*345*23MM
I) J 5 # 345*345*35MM

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		! c 2!•!•2î0 ° 9L€ œ (	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X": ±3" .X": ±2" .XX": ±1"	
NAME:		Çá¥ç ^{a1} Ø 6x6x11 ìùÆ¬ ²»Đâ, Öμ¬Æ¬ 260G 9.2½Å	
APPD. JM_Zheng		PJ. NO.: TS.01.25-11-11-03	
CHKD. LYX		SIZE: A4 DRW NO.:	
PDWG.NO: 0013-1		FINISH: SEE NOTES MAT'L.: SEE NOTES	
DR. SGF		SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	