


REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	SGF

主要技术参数	1	操作行程	0.25±0.1mm
	2	额定电压、电流	DC12V/50mA
	3	接触电阻	30mΩ(max)
	4	绝缘电阻	100MΩ(min)
	5	耐 压	250V AC/1min
	6	动 作 力	160/260±30gf
	7	使用寿命	80000次
	8	尺 寸	未注公差均按 GB/T1804—2000





序号	名 称	数量	材 料	镀涂/颜色
1	底 座	1	黄铜与PPA	黑色与镀银
2	盖 板	1	铁皮	镀银
3	按 钮	1	PPA	白色
4	弹 片	1	不锈钢	镀银/白色

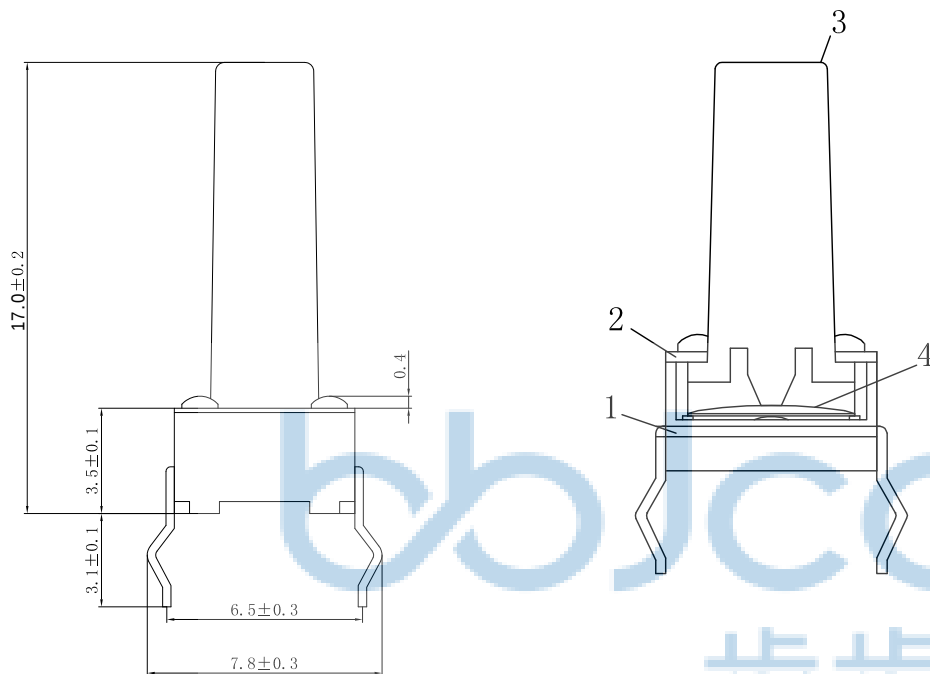

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0013-1

 深圳市步步精科技有限公司					
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3* .X*: ±2* .XX*: ±1*			
		NAME: 轻触开关 6x6x17.0 直插 不锈钢弹片 260G 12H 白柄袋装			
APPD.	JM_Zheng		PJ. NO.: TS.01.37-21-31-03		
CHKD.	LYX		SIZE: A4	DRW NO.:	
DR.	SGF		FINISH: SEE NOTES MAT'L.: SEE NOTES		
		SCALE: N/A	REV.: A0	UNIT: mm	PAGE: 1/2

PE袋规格:***X*** (以实际出货为准)

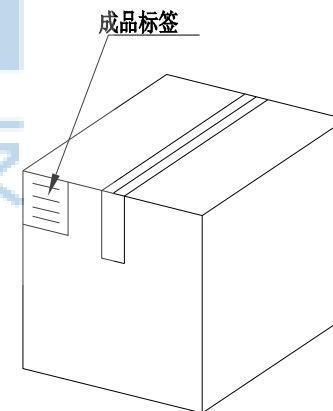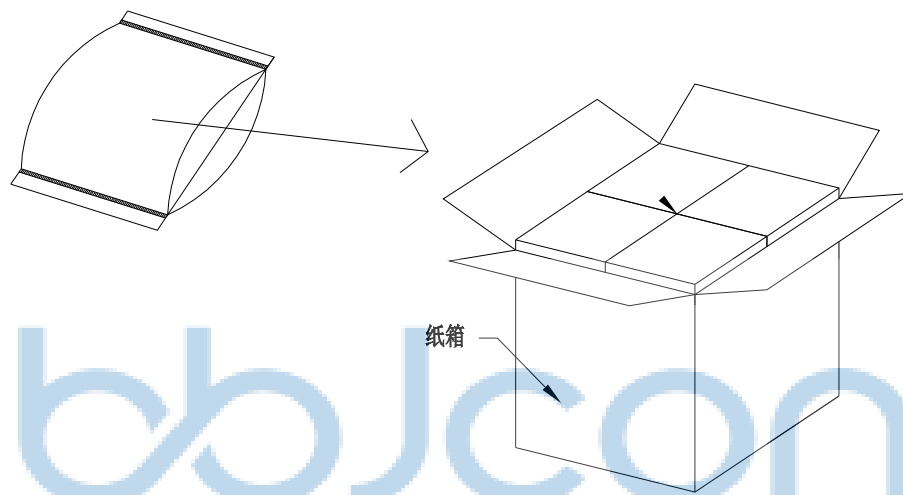

1. 包装要求:

- 1.1 每PE袋包装 1000 pcs;
- 1.2 每1袋放一小纸盒;
- 1.3 每20个小纸盒放一个纸箱, 共计20000PCS
- 1.4 纸箱外贴上标签



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
PJ. NO.:	TS.01.37-21-31-03	NAME: 轻触开关 6x6x17.0 直插 不锈钢弹片 260G 12H 白柄袋装	
SIZE: A4	DRW NO.:	FINISH: SEE NOTES	
SCALE: N/A	REV.: A0	UNIT: mm	PAGE: 2/2
PDWG.NO: 0013-1	DR. SGF	APPD. JM_Zheng	CHKD. LYX
		.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	
		X": ±3" .X": ±2" .XX": ±1"	