



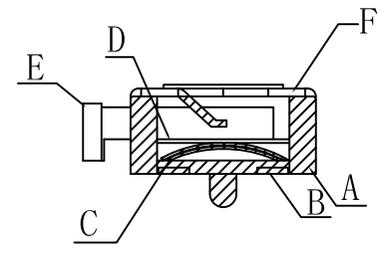
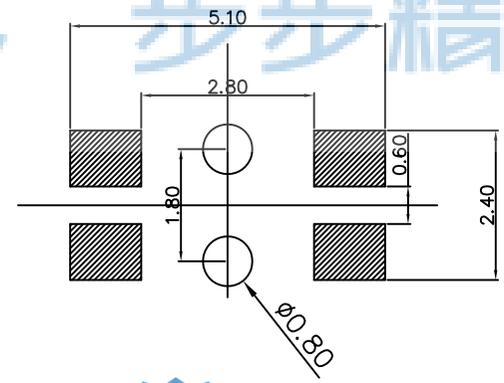
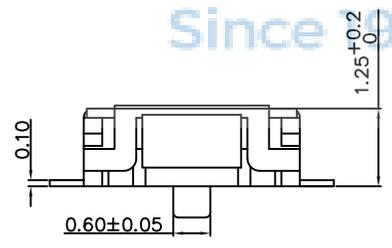


REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	SGF



原理图

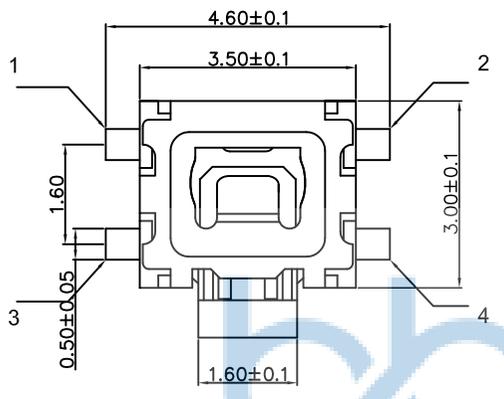

项 目		标 准
电气性能	额定电流 Rated Current:	50mA MAX
	额定电压 Rated voltage:	DC 12V
	接触电阻 Contact resistance:	≤50mΩ
	绝缘电阻 Insulation Resistance:	≥100MΩ
机械性能	耐压强度 Compressive strength:	AC250V 50Hz/1 min
	操作力度 Operatng force:	260 ±30gf
	机械寿命 Mechanical life:	50,000 cycles Min
环境性能	操作行程 Operaton Stroke:	0.25±0.1mm
	温度范围 Temperature Range:	-30°C ~ +85°C

NO.	零件名称 Part Name	QTY	材料 Material	镀涂 Plating coating	颜色 colour	备注 Remarks
G	外薄膜	1	聚酰亚胺 T=0.05	/	黄色	
F	盖板	1	SUS301-3/4H T=0.15	整体清洗	白色	
E	桃心	1	进口尼龙	/	耐磨灰色	
D	内薄膜	1	进口聚酰亚胺 T=0.07	/	灰色	
C	弹片/锅仔片	2	Ag-SUS T=0.05	接触单面镀银	银白色	
B	嵌件	1	C5191R-H T=0.1	整体镀银	银白色	
A	底座/基座	1	LCP 4009	/	白色	



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.

深圳市步步精科技有限公司

NAME: 轻触开关 四脚小龟 A03-04 侧按H=3.80 带柱 260G 不锈钢弹片

APPD. JM_Zheng

CHKD. LYX

PDWG.NO: 0124-1 DR. SGF

PJ. NO.: TS.25.59-41-3A-01




SIZE: A4 DRW NO.:

FINISH: SEE NOTES MAT'L.: SEE NOTES

SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	SGF

PE袋规格:***X*** (以实际出货为准)

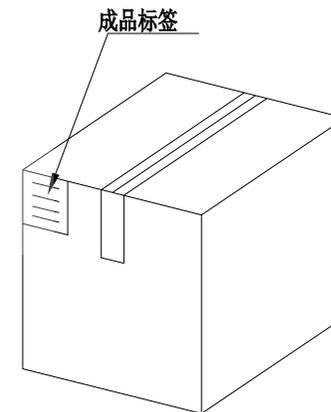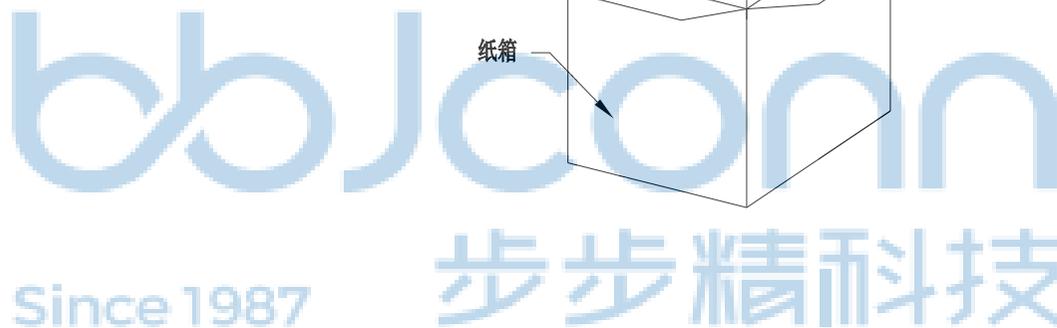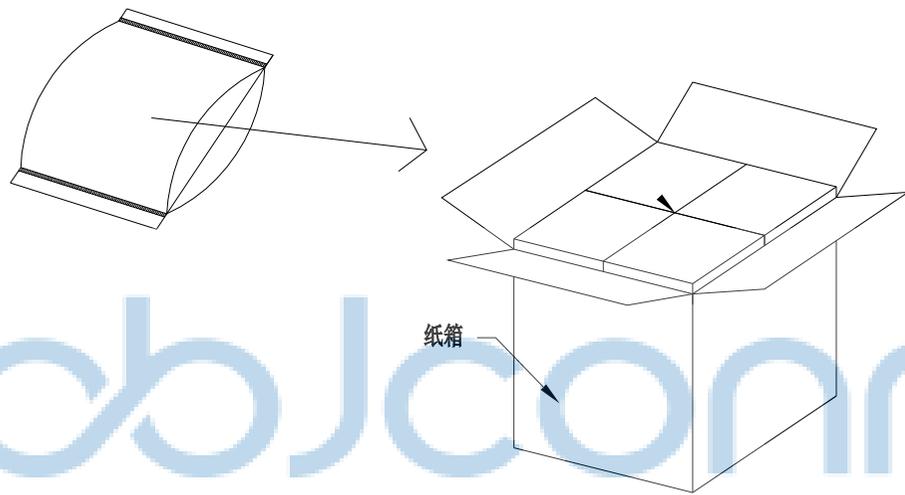

1. 包装要求:

- 1.1 每PE袋包装 1000 pcs;
- 1.2 每1袋放一小纸盒;
- 1.3 每20个小纸盒放一个纸箱, 共计20000PCS
- 1.4 纸箱外贴上标签



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 .X: ±0.38 X': ±3' .XX: ±0.25 .X': ±2' .XXX: ±0.13 .XX': ±1'		NAME: 轻触开关 四脚小龟 A03-04 侧按H=3.80 带柱 260G 不锈钢弹片	
APPD.	JM_Zheng	PJ. NO.: TS.25.59-41-3A-01		SIZE: A4 DRW NO.:	
CHKD.	LYX	FINISH: SEE NOTES		MAT'L.: SEE NOTES	
PDWG.NO:	0124-1	DR.	SGF	SCALE: N/A	REV.: A0 UNIT: mm PAGE: 2/2