

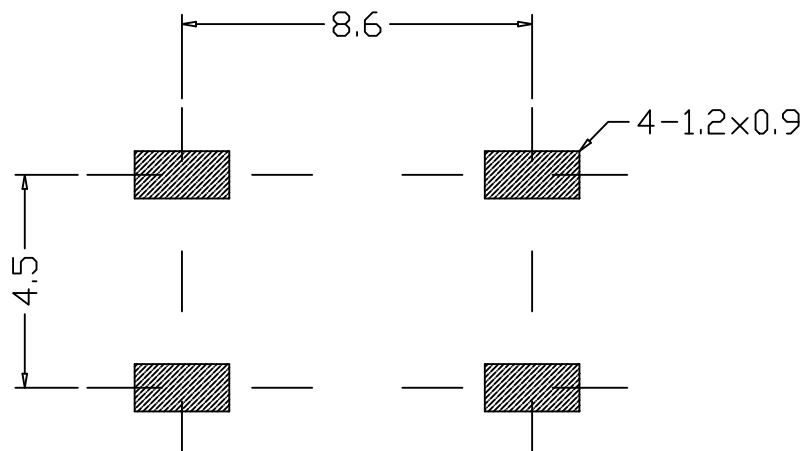
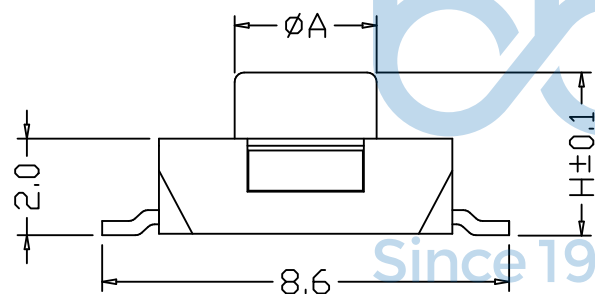
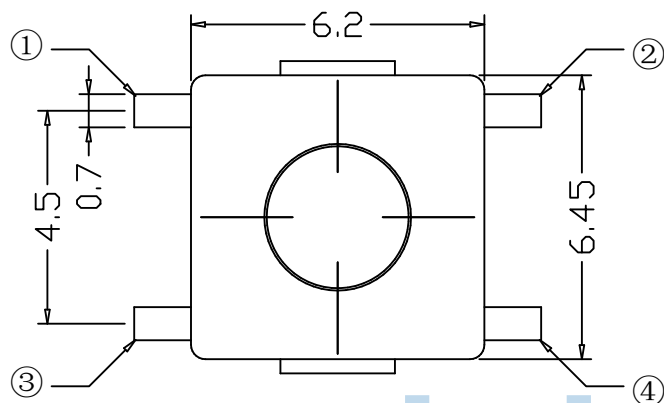




PCB线路板图

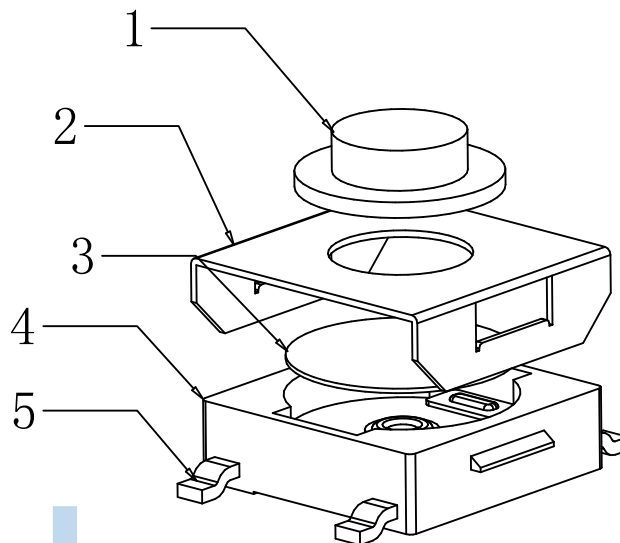

电路图

REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

性能	
额定规格	DC12V/50mA
接触电阻	≤100mΩ
绝缘电阻	≥100MΩ
耐电压	AC250V/min
动作力	160/260±50gf
寿命	10万次





A	H (高度)
∅3.0	2.5
∅3.0	2.7
∅3.0	3.1
∅3.0	3.4
∅2.9	3.7
∅2.9	4.3
∅2.9	5
∅2.9	5.5



序号	产品名称	材料规格	表面处理 颜色	数量
1	按钮	PPA		1
2	盖板	不锈钢304	镀铜锡	1
3	簧片	不锈钢		1
4	底座	PPA		1
5	接线片	铜	镀银	1

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
APPD.	JM_Zheng	NAME:	轻触开关 6.2x6.2x3.4 平座 四脚贴片 不锈钢弹片 260gf 红柄 不锈钢盖
CHKD.	LYX	PJ. NO.:	TS.18.54-11-32-01
DR.	TSP	SIZE:	A4 DRW NO.:
PDWG,NO:	0472-1	FINISH:	SEE NOTES
		MAT'L.:	SEE NOTES
		SCALE:	N/A
		REV.:	A0
		UNIT:	mm
		PAGE:	1/2



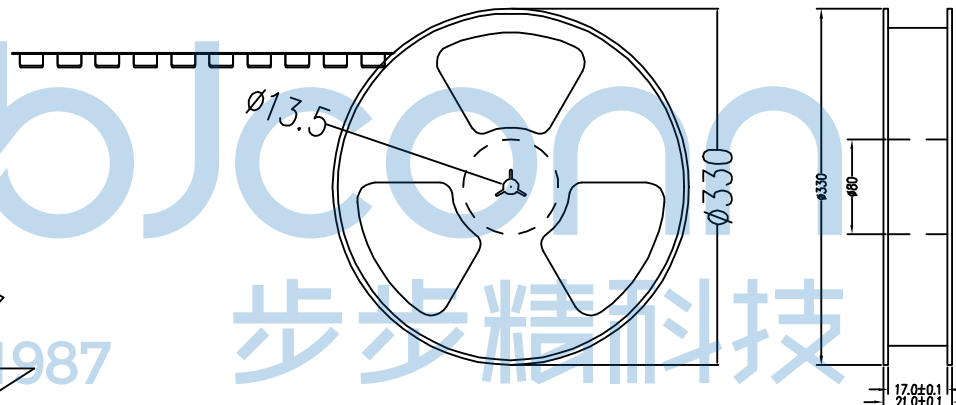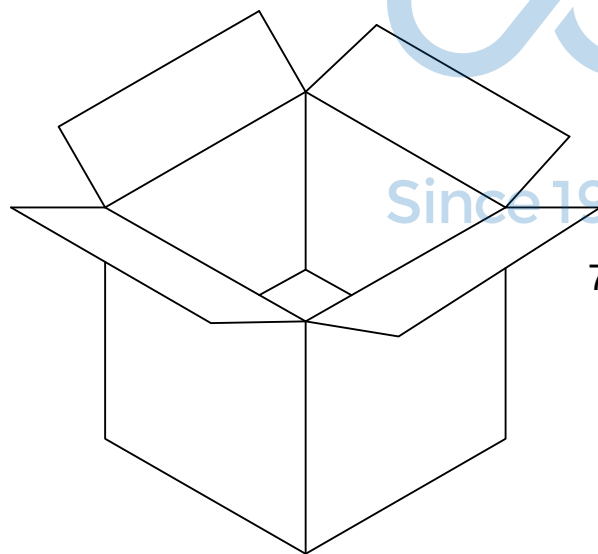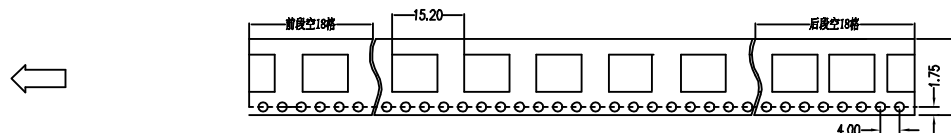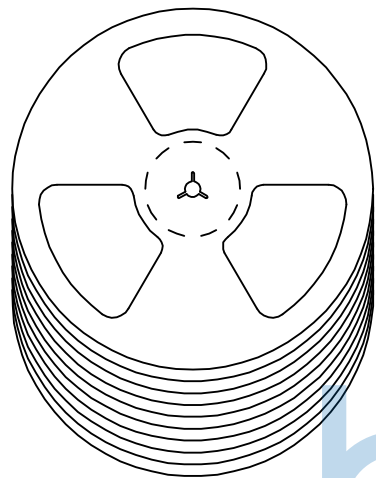

7# Ö

5>õ Gy Ö 3 & 6 § È § 1á Ä
5>õ>»K⁻ Ö Ö!y § } > 40^a ZO^a I È]L\$ 5>õ Ä
€CX Ö
E- f Ö6Š I' Ä 3 6 Å È
: V Ö6Š %' Ä 3 (7 Å
§- Ö6Š9 %' Ä

4è1á?ô I Ö 0 0
4è1á?ô I Ö 0 0

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司		NAME: 轻触开关 6.2x6.2x3.4 平座 四脚贴片 不锈钢弹片 260gf 红柄 不锈钢盖	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3" .X*: ±2" .XX*: ±1"		APPD. JM_Zheng	
PDWG.NO: 0472-1		CHKD. LYX		DR. TSP	
				PJ. NO.:TS.18.54-11-32-01	
				SIZE: A4 DRW NO.:	
				FINISH: SEE NOTES MAT'L.: SEE NOTES	
				SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	