
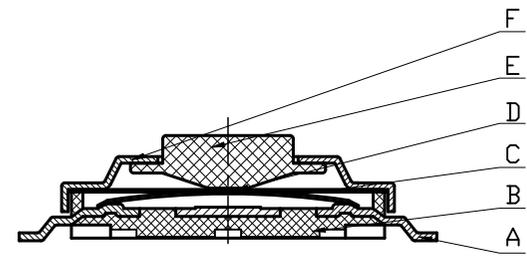




REV.	ECN NO	CONTENT	DATE	ENGINEER
A0				

技术要求:


1. 零部件表面光洁无划伤, 水花, 变形, 影响外观及性能等缺陷。
2. 额定电流: 50mA. 12V DC, 绝缘电阻100MΩmin, 100V DC, 介电强度250V AC for 1min, 接触电阻100mΩ max。
3. 开关手感明显, 档位清晰可靠, 无卡滞现象, 消除外力后, 应能快速回位。

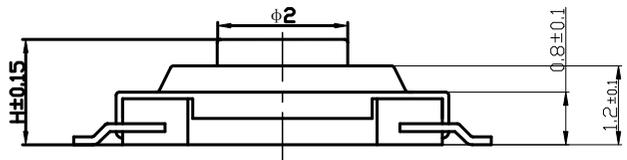

H						
1.5	1.6	1.7	1.8	1.9	2.0	2.5 3.0

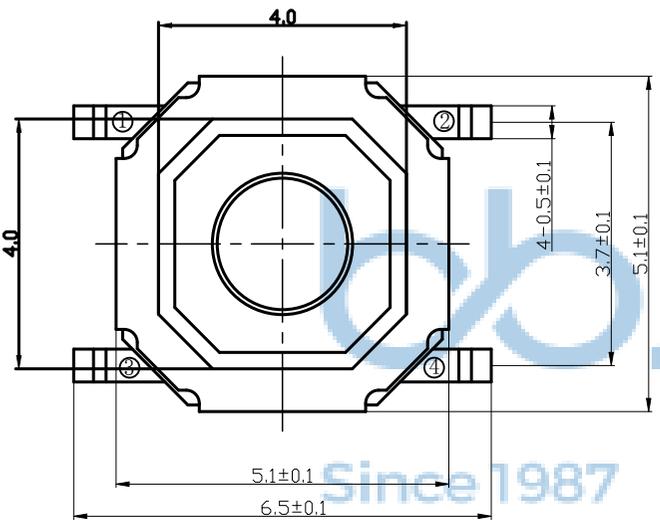

原理图

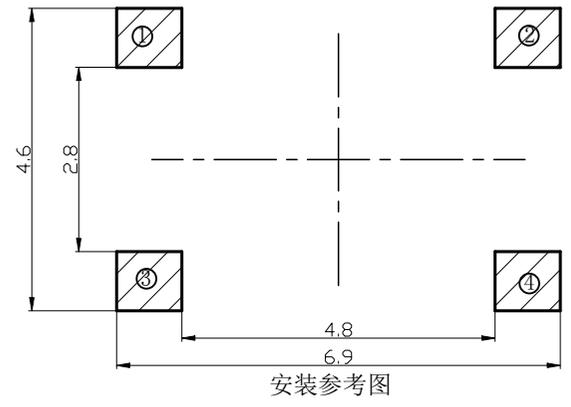

序号	名称	材料	数量	备注
5	盖板	不锈钢0.13	1	酸洗
4	按钮	黄铜	1	酸洗
3	簧片	进口不锈钢覆银	1	8万
2	底座	LCP黑	1	
1	卡件	磷铜0.15	1	镀银

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.

PDWG.NO: 0278-1

深圳市步步精科技有限公司

NAME: 轻触开关 4x4x2.5 铜头贴片 不锈钢弹片 160gf 编带

PJ. NO.: TS.03.07-12-38-01

SIZE: A4 | DRW NO.:





FINISH: SEE NOTES | MAT'L.: SEE NOTES

SCALE: N/A | REV.: A3 | UNIT: mm | PAGE: 1/2

APPD. JM_Zheng

CHKD. TSP

DR. LYX

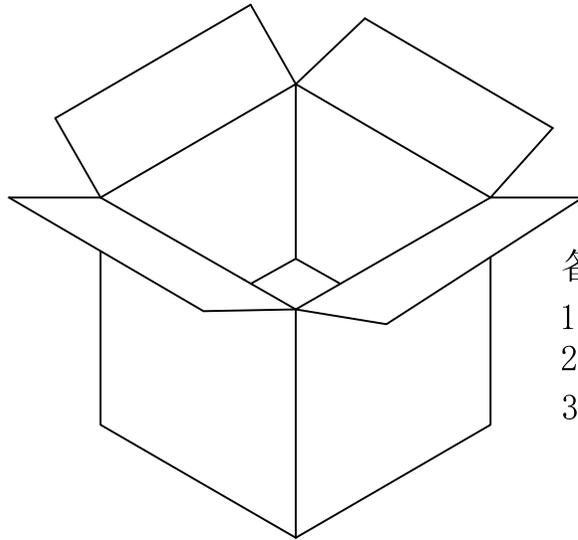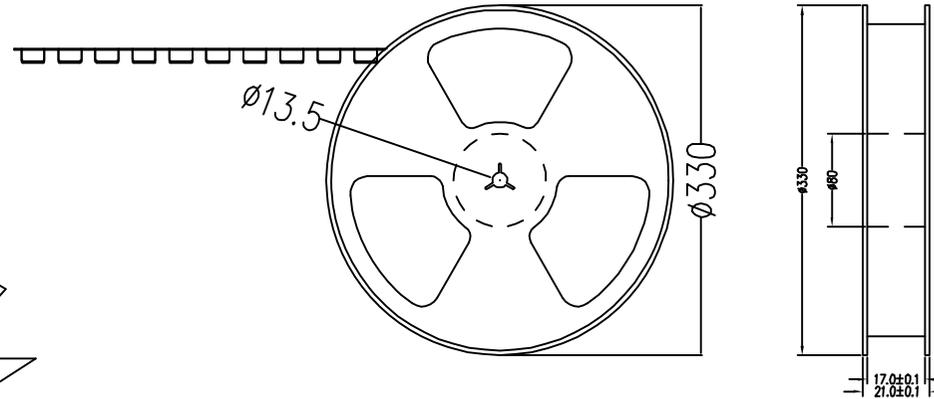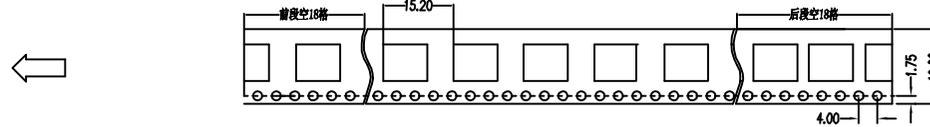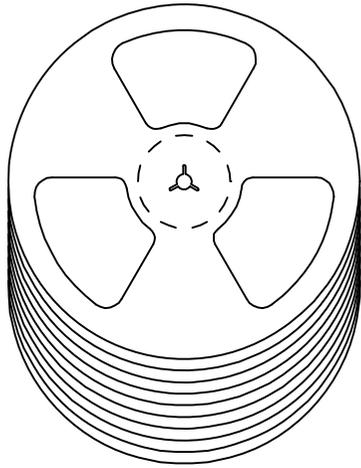

备注:

1. 包装数量: 3000/PCS/卷, 10卷/箱。
2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
3. 材质:
载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
卷盘: 聚苯乙烯。

纸箱规格: 345*345*23MM

纸箱规格: 345*345*35MM

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X*: ±3* .X*: ±2* .XX*: ±1*	NAME: Çá ¥¿¹Ø 4x4x2.5 í-í-ü/Æ-²»Đâ, Öµ-/Æ- 160gf ±à'ø	
APPD. JM_Zheng	CHKD. TSP	PJ. NO.: TS.03.07-12-38-01 SIZE: A4 DRW NO.:	
PDWG.NO: 0278-1	DR. LYX	FINISH: SEE NOTES SCALE: N/A REV.: A3 UNIT: mm	MAT'L.: SEE NOTES PAGE: 2/2