
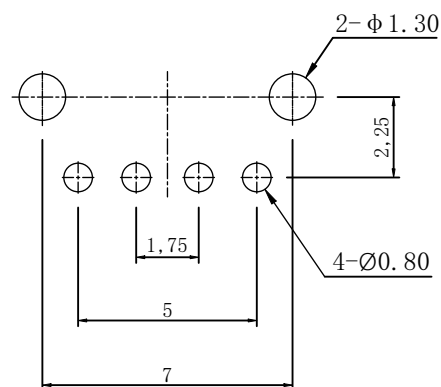



REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

主要技术规格:

1. 额 定 值: 50mA DC12V
2. 接触电阻: $\leq 100m\Omega$
3. 操 作 力: $250 \pm 40gf \& 160 \pm 40gf$
4. 行 程: $0.25 \pm 0.1mm$
5. 绝缘电阻: $\geq 100M\Omega$
6. 抗电强度: 250V 50HZ 1Min.
7. 寿 命: 100,000 Cycles

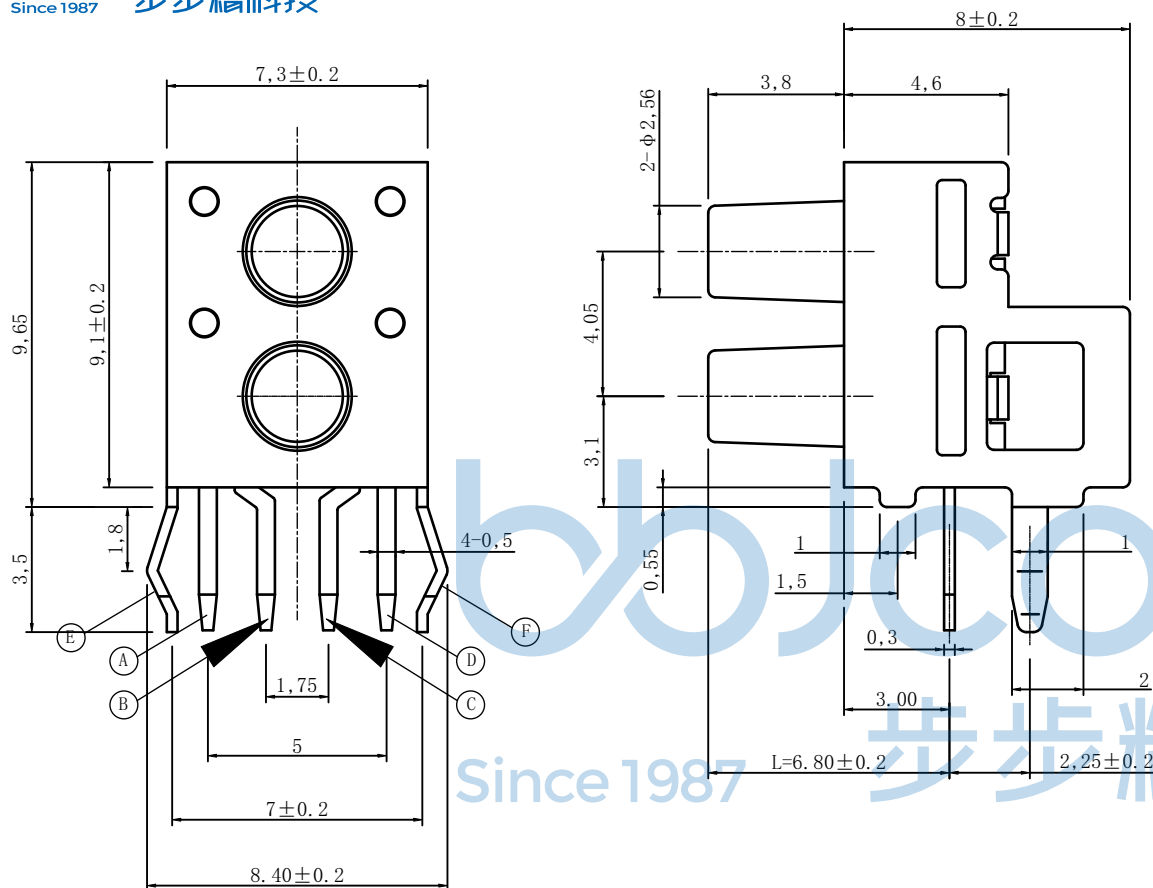

PCB. 焊接图

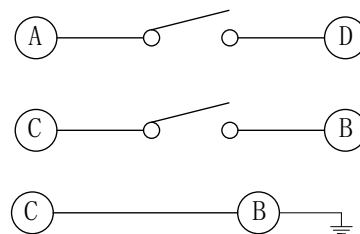

电路图


5	引脚、触点	黄铜	1	镀银
4	基座	PPA	1	耐温280℃（黑色）
3	簧片	不锈钢	1	覆银
2	支架	黄铜	1	镀锡
1	按钮	PPA	1	耐温280℃（黑色）
序号	零件名称	材料规格	数量	备注

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG,NO: 0459-1


.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13		X*: ± 3 .X*: ± 2 .XX*: ± 1		NAME: 轻触开关 6x6x8.4 双支架 不锈钢弹片 260GF (DP24-084BB2)	
APPD.	JM_Zheng	PJ. NO.: TS.01.73-31-3Z-01		SIZE: A4 DRW NO.:	
CHKD.	LYX	FINISH: SEE NOTES		MAT'L.: SEE NOTES	
DR.	TSP	SCALE: N/A		REV.: A0	UNIT: mm
				PAGE: 1/2	

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

PE袋规格: 260*185

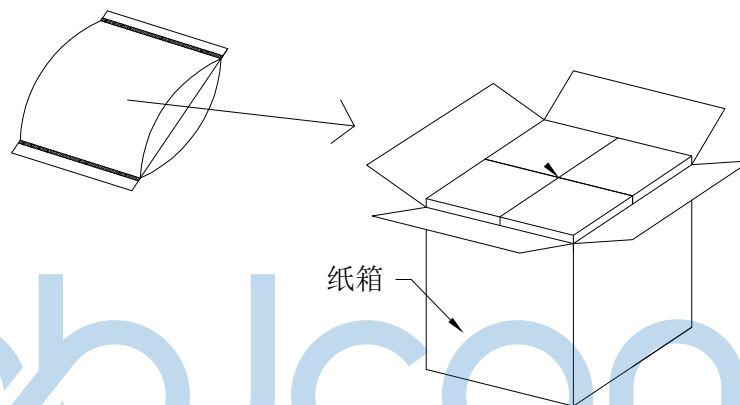

成品标签



1. 包装要求:

- 1.1 每个PE袋包装500pcs;
- 1.2 每1袋放一小纸盒;
- 1.3 每20个小纸盒放一个纸箱, 共计10000pcs;
- 1.4 纸箱外贴上标签



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
PDWG.NO: 0459-1	DR.	TSP	NAME: 轻触开关 6x6x8.4 双支架 不锈钢弹片 260GF (DP24-084BB2)
APPD.	JM_Zheng	PJ. NO.: TS.01.73-31-3Z-01	SIZE: A4 DRW NO.:
CHKD.	LYX	FINISH: SEE NOTES	MAT'L.: SEE NOTES
		SCALE: N/A	REV.: A0 UNIT: mm PAGE: 2/2