

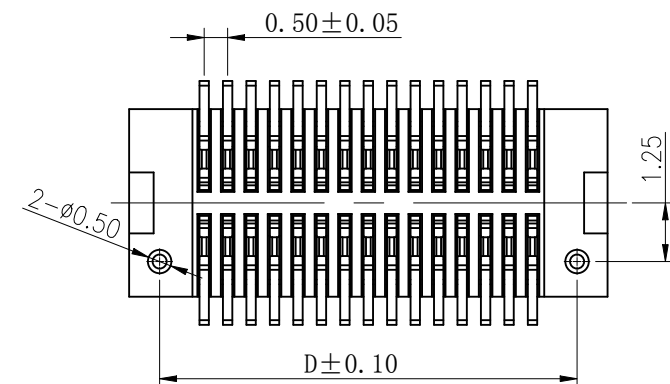
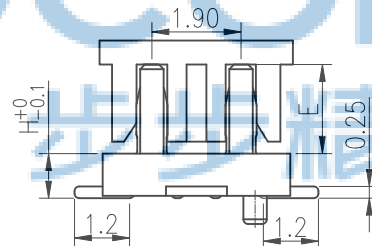
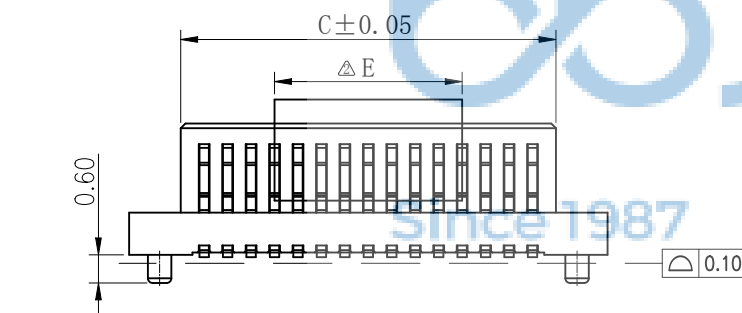
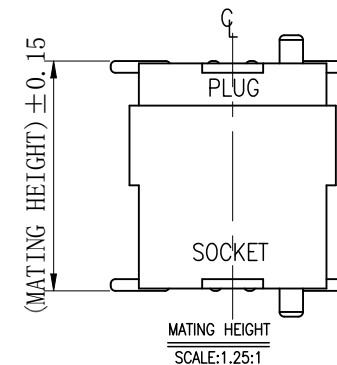
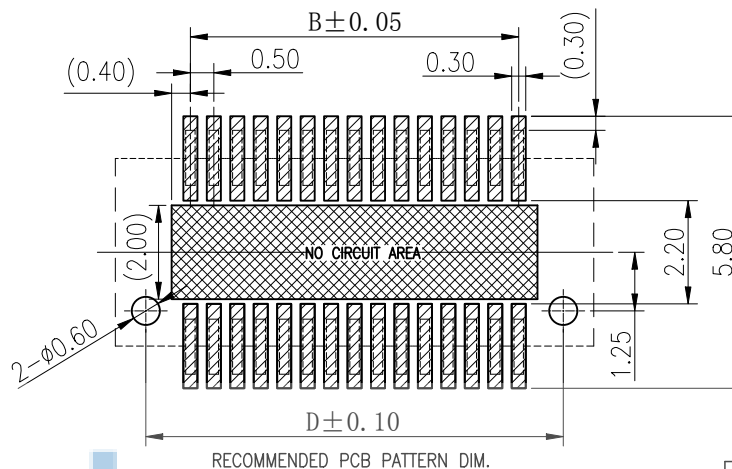


NOTES:  
1.HUOSING: PA9T HIGH-TEMP THERMOPLASTIC UL94V-0 COLOR:BLACK  
2.TERMINAL:PHOSPHOR BRONZE  
PLATING:1\*''GOLD FLASH OVERALL 50~100\*''NICKEL UNDER PLATED.

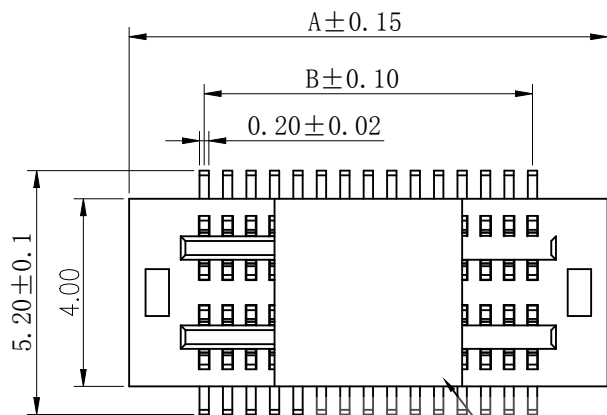

| NO.of contacts | Dimensions |       |       |       |      | NO.of contacts | Dimensions |       |       |       |      |
|----------------|------------|-------|-------|-------|------|----------------|------------|-------|-------|-------|------|
|                | A.         | B.    | C.    | D.    | E.   |                | A.         | B.    | C.    | D.    | E.   |
| 4              | 3.70       | 0.50  | 1.50  | 2.40  | 4.00 | 54             | 16.20      | 13.00 | 14.00 | 14.90 | 8.00 |
| 6              | 4.20       | 1.00  | 2.00  | 2.90  |      | 56             | 16.70      | 13.50 | 14.50 | 15.40 |      |
| 8              | 4.70       | 1.50  | 2.50  | 3.40  |      | 58             | 17.20      | 14.00 | 15.00 | 15.90 |      |
| 10             | 5.20       | 2.00  | 3.00  | 3.90  |      | 60             | 17.70      | 14.50 | 15.50 | 16.40 |      |
| 12             | 5.70       | 2.50  | 3.50  | 4.40  |      | 62             | 18.20      | 15.00 | 16.00 | 16.90 |      |
| 14             | 6.20       | 3.00  | 4.00  | 4.90  |      | 64             | 18.70      | 15.50 | 16.50 | 17.40 |      |
| 16             | 6.70       | 3.50  | 4.50  | 5.40  |      | 66             | 19.20      | 16.00 | 17.00 | 17.90 |      |
| 18             | 7.20       | 4.00  | 5.00  | 5.90  |      | 68             | 19.70      | 16.50 | 17.50 | 18.40 |      |
| 20             | 7.70       | 4.50  | 5.50  | 6.40  |      | 70             | 20.20      | 17.00 | 18.00 | 18.90 |      |
| 22             | 8.20       | 5.00  | 6.00  | 6.90  |      | 72             | 20.70      | 17.50 | 18.50 | 19.40 |      |
| 24             | 8.70       | 5.50  | 6.50  | 7.40  | 8.00 | 74             | 21.20      | 18.00 | 19.00 | 19.90 |      |
| 26             | 9.20       | 6.00  | 7.00  | 7.90  |      | 76             | 21.70      | 18.50 | 19.50 | 20.40 |      |
| 28             | 9.70       | 6.50  | 7.50  | 8.40  |      | 78             | 22.20      | 19.00 | 20.00 | 20.90 |      |
| 30             | 10.20      | 7.00  | 8.00  | 8.90  |      | 80             | 22.70      | 19.50 | 20.50 | 21.40 |      |
| 32             | 10.70      | 7.50  | 8.50  | 9.40  |      | 82             | 23.20      | 20.00 | 21.00 | 21.90 |      |
| 34             | 11.20      | 8.00  | 9.00  | 9.90  |      | 84             | 23.70      | 20.50 | 21.50 | 22.40 |      |
| 36             | 11.70      | 8.50  | 9.50  | 10.40 |      | 86             | 24.20      | 21.00 | 22.00 | 22.90 |      |
| 38             | 12.20      | 9.00  | 10.00 | 10.90 |      | 88             | 24.70      | 21.50 | 22.50 | 23.40 |      |
| 40             | 12.70      | 9.50  | 10.50 | 11.40 |      | 90             | 25.20      | 22.00 | 23.00 | 23.90 |      |
| 42             | 13.20      | 10.00 | 11.00 | 11.90 |      | 92             | 25.70      | 22.50 | 23.50 | 24.40 |      |
| 44             | 13.70      | 10.50 | 11.50 | 12.40 | 8.00 | 94             | 26.20      | 23.00 | 24.00 | 24.90 |      |
| 46             | 14.20      | 11.00 | 12.00 | 12.90 |      | 96             | 26.70      | 23.50 | 24.50 | 25.40 |      |
| 48             | 14.70      | 11.50 | 12.50 | 13.40 |      | 98             | 27.20      | 24.00 | 25.00 | 25.90 |      |
| 50             | 15.20      | 12.00 | 13.00 | 13.90 |      | 100            | 27.70      | 24.50 | 25.50 | 26.40 |      |

| MATING HEIGHT | PLUG (H.) | SOCKET (H.) | E   |
|---------------|-----------|-------------|-----|
| 3.0           | 0.8       | 2.2         | 1.6 |
| 3.5           | 1.3       | 2.2         | 1.6 |
| 4.0           | 1.0       | 3.0         | 1.9 |
| 4.5           | 1.0       | 3.5         | 1.9 |
| 5.0           | 1.0       | 4.0         | 1.9 |
| 5.5           | 1.0       | 4.5         | 1.9 |
| 6.0           | 2.0       | 4.0         | 1.9 |
| 6.5           | 2.0       | 4.5         | 1.9 |

THIS DOCUMENT IS THE  
SOLE PROPERTY OF  
BBJconn Technology Co.,Ltd.  
Corporation AND SHOULD  
NOT BE USED IN WHOLE  
OR IN PART WITHOUT  
PRIOR WRITTEN PERMISSION.  
PDWG.NO: 0335-1


深圳市步步精科技有限公司  
NAME:板对板连接器 公座 0.5-2x5P 双槽BTB PLUG  
合高H=6.0 SMT 带柱  
PJ. NO.: 123-124-200001-W1G  
SIZE: A4 DRW NO.:  
FINISH: SEE NOTES MAT'L.: SEE NOTES  
SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2

NOTE:


- 1.10 Sprocket hole pitch cumulative tolerance  $\pm 0.20$ .
2. Carrier camber is within 1mm in 100mm.
3. Material: black conductive polystyrene alloy.
4. Material Thickness:  $0.3 \pm 0.05$ mm.
5. All dimensions meet EIA-481-B requirements.
6. 5000pcs Pef Reel.
7. For tape width (dim W) 16 and 24mm pilot holes are provided on one sides.  
For tape width (dim W) 32, 44 and 56mm pilot holes are provided on both sides.



Tape width 16 and 24 mm

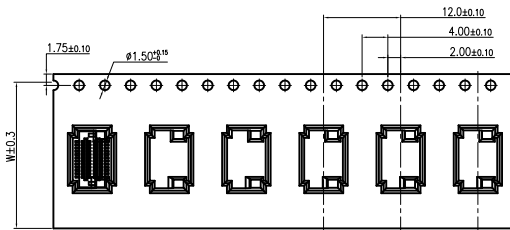

Tape width 32 and 44 mm

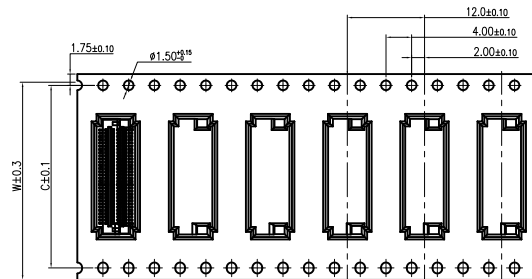

PULL OUT DIRECTION

PULL OUT DIRECTION

COVER TAPE  
(上盖带)



PULL OUT DIRECTION

(PEELING ANGLE)

CARRIER TAPE  
(下载带)

SAFE TAPE  
(安全带 L=1750mm Ref)


SCALE 1:4

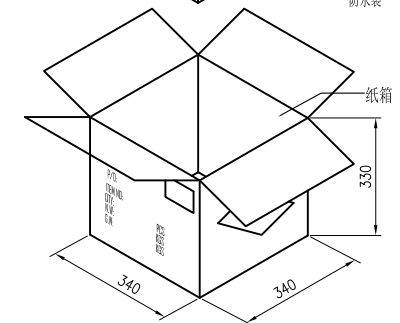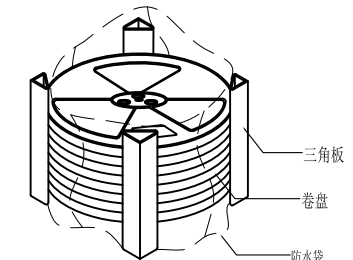

| PIN NO.      | W  | C    | PCS /REEL | REEL/CARTON | SUM(PCS) |
|--------------|----|------|-----------|-------------|----------|
| 4PIN~20PIN   | 16 | -    | 1000      | 15          | 15000    |
| 22PIN~52PIN  | 24 | -    | 1000      | 10          | 10000    |
| 54Pin~70PIN  | 32 | 28.4 | 1000      | 8           | 8000     |
| 72Pin~100PIN | 44 | 40.4 | 1000      | 6           | 6000     |

REEL  
(胶盘)

GP LABEL  
(环保标签)  
(1PCS)

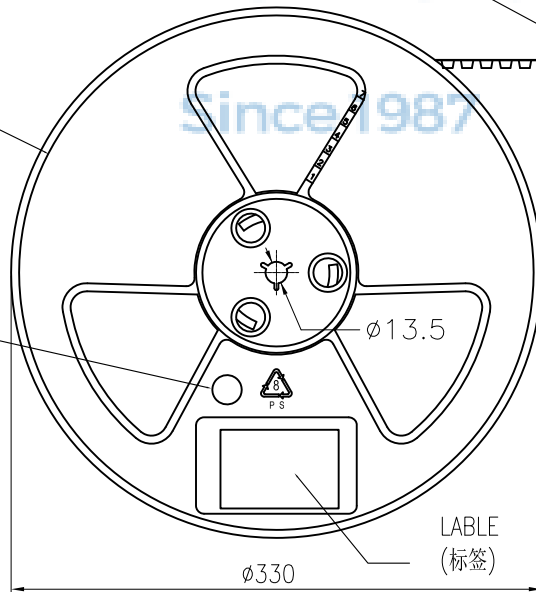

THIS DOCUMENT IS THE  
SOLE PROPERTY OF  
BBJconn Technology Co., Ltd.  
Corporation AND SHOULD  
NOT BE USED IN WHOLE  
OR IN PART WITHOUT  
PRIOR WRITTEN PERMISSION.  
PDWG.NO: 0335-1

**深圳市步步精科技有限公司**

NAME: 板对板连接器 公座 0.5-2x5P 双槽BTB PLUG 合高H=6.0 SMT 带柱

PJ. NO.: 123-124-200001-W1G

SIZE: A4 DRW NO.:

FINISH: SEE NOTES MAT'L.: SEE NOTES

SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2