



REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0				

SPECIFICATIONS:

- 1.VOLTAGE/CURRENT RATING: 30V/0.3A AC;
- 2.WITHSTANDING VOLTAGE: 100V AC ONE MINUTE;
- 3.INSULATION RESISTANCE: 50M Ω MIN;
- 4.CONTACT RESISTANCE: 100m Ω MAX;
- 5.OPERATING TEMPERATURE RANGE: -35° C TO 85° C.




MATERIAL:

- 1.INSULATOR: LCP UL 94V-0 BLACK;
- 2.TERMINAL: COPPER ALLOY;
- 3.METAL FITTINGS: COPPER ALLOY.

PLATING:

- 1.TERMINAL: GOLD PLATING,
NICKEL 50u" MIN. OVER ALL;
- 2.METAL FITTINGS: TIN 100u" MIN. OVER NICKEL 50u"MIN.





PIN NO.	A	B	C
10	3.80	3.20	1.60
12	4.20	3.60	2.00
16	5.00	4.40	2.80
20	5.80	5.20	3.60
24	6.60	6.00	4.40
30	7.80	7.20	5.60
34	8.60	8.00	6.40
40	9.80	9.20	7.60
50	11.80	11.20	9.60

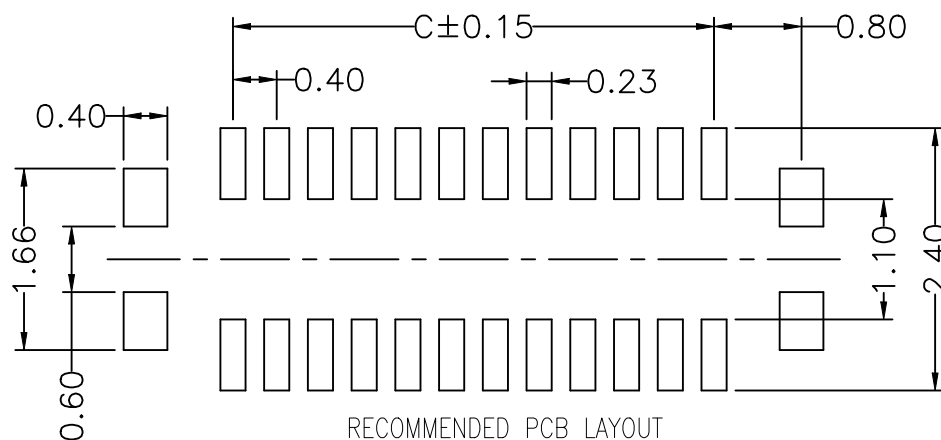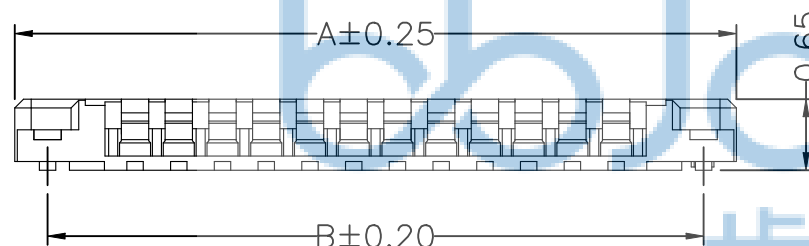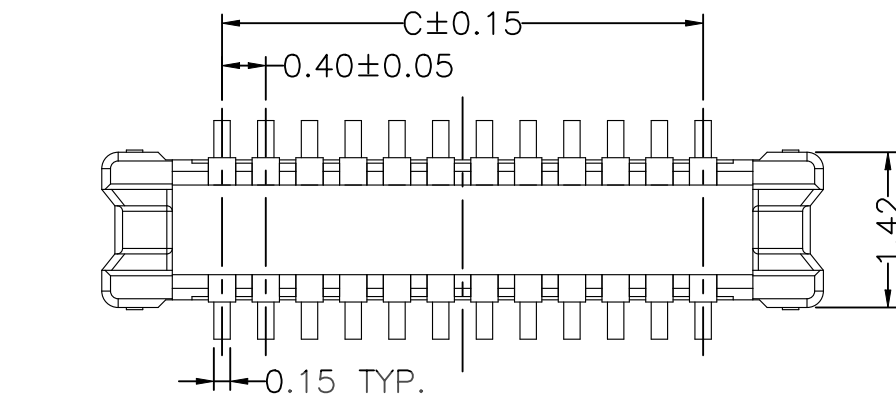

RECOMMENDED PCB LAYOUT
CONNECTOR SIDE

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0335-1

深圳市步步精科技有限公司			
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X*: ±3° .X*: ±2° .XX*: ±1°	NAME: 板对板连接器 公座 0.40-2x15P 单槽BTB PLUG SMT 合高H=0.80	
APPD.	JM_Zheng	PJ. NO.:	WT.09.31-A3-L002
CHKD.	LYX	SIZE: A4	DRW NO.: AXE630
DR.	TSP	FINISH: SEE NOTES	MAT'L.: SEE NOTES
		SCALE: N/A	REV.: A0 UNIT: mm PAGE: 1/2

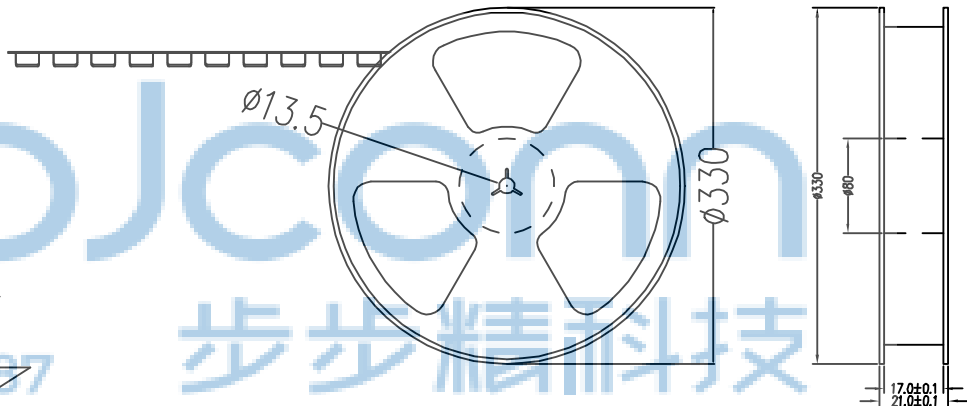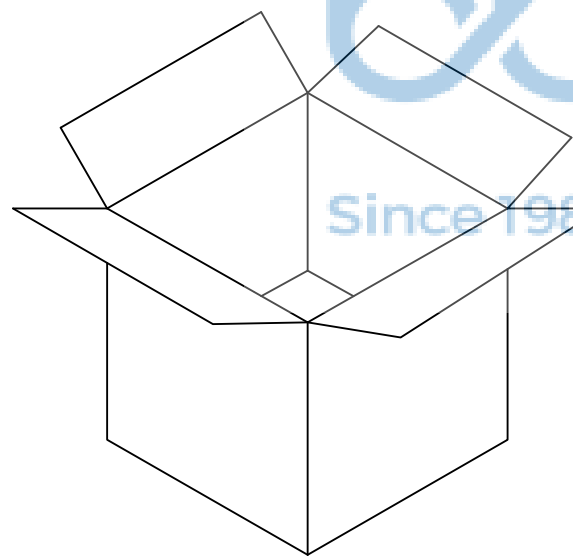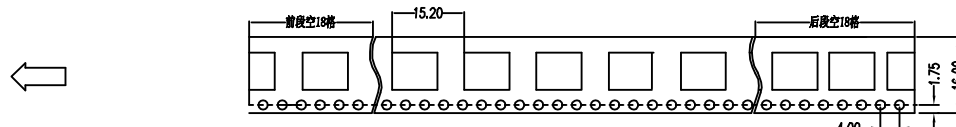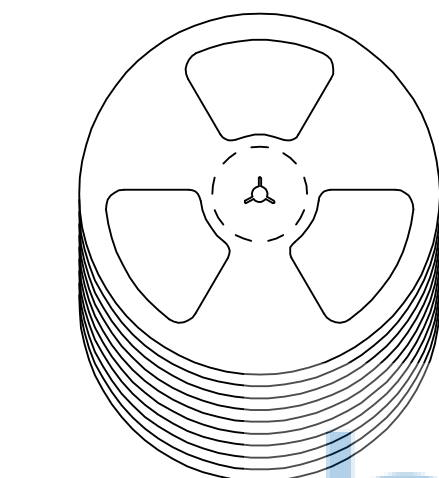

备注:

- 包装数量: 4000/PCS/卷, 10卷/箱。
- 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
- 材质:
载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
卷盘: 聚苯乙烯。

纸箱规格: 345*345*23MM

纸箱规格: 345*345*35MM

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG.NO: 0335-1		深圳市步步精科技有限公司		NAME: 板对板连接器 公座 0.40-2x15P 单槽BTB PLUG SMT 合高H=0.80	
.X: ± 0.38	X*: $\pm 3^{\circ}$	PJ. NO.: WT.09.31-A3-L002		SIZE: A4 DRW NO.: AXE630	
.XX: ± 0.25	.X*: $\pm 2^{\circ}$	FINISH: SEE NOTES		MAT'L.: SEE NOTES	
.XXX: ± 0.13	.XX*: $\pm 1^{\circ}$	SCALE: N/A		REV.: A0	
APPD. JM_Zheng		UNIT: mm		PAGE: 2/2	
CHKD. LYX					
DR. TSP					