
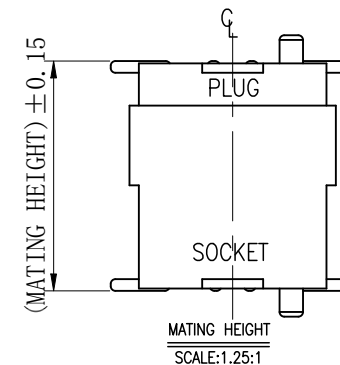
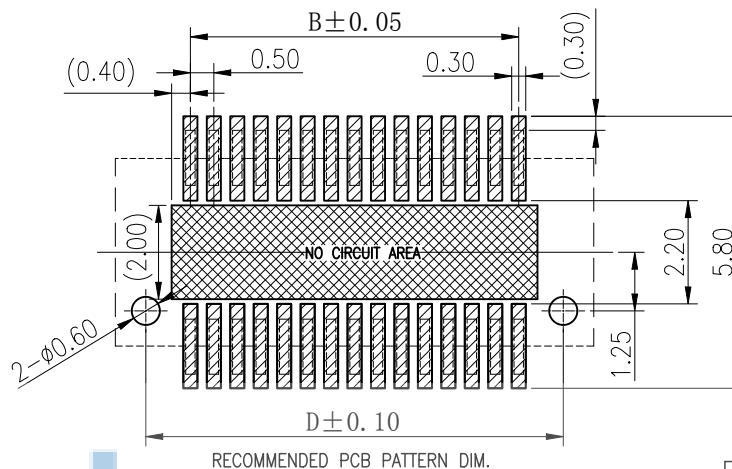


NOTES:





- 1.HUOSING: PA9T HIGH-TEMP THERMOPLASTIC UL94V-0 COLOR:BLACK
- 2.TERMINAL:PHOSPHOR BRONZE
- PLATING:1*''GOLD FLASH OVERALL 50~100*''NICKEL UNDER PLATED.

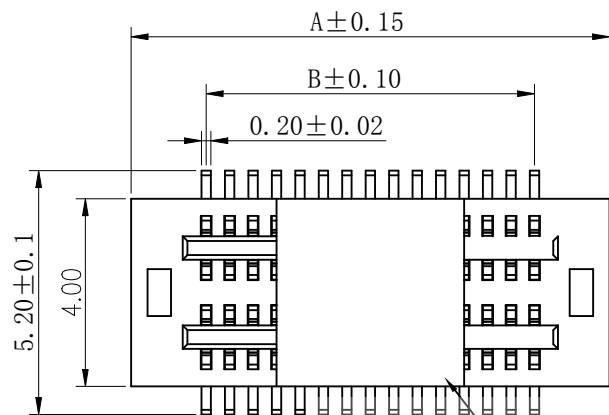

CAP

RECOMMENDED PCB PATTERN DIM.

TOLERANCE : ± 0.05

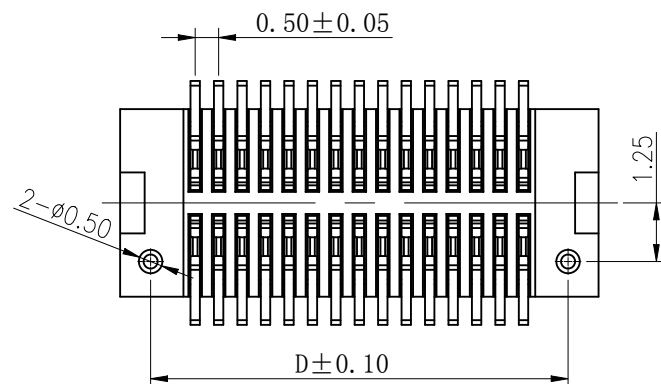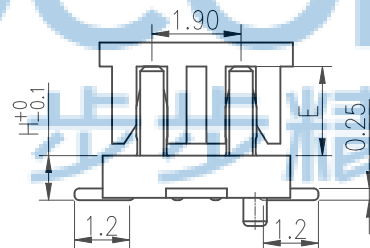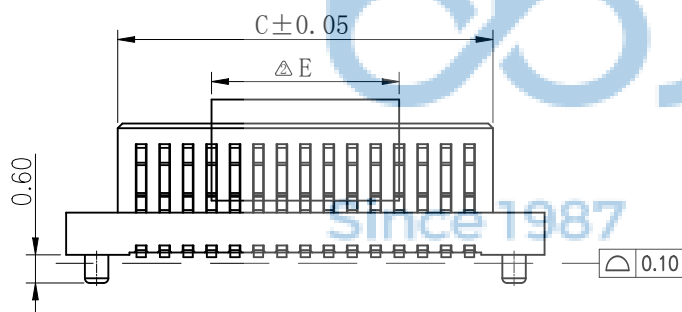

MATING HEIGHT	PLUG (H.)	SOCKET (H.)	E
3.0	0.8	2.2	1.6
3.5	1.3	2.2	1.6
4.0	1.0	3.0	1.9
4.5	1.0	3.5	1.9
5.0	1.0	4.0	1.9
5.5	1.0	4.5	1.9
6.0	2.0	4.0	1.9
6.5	2.0	4.5	1.9

NO.of contacts	Dimensions					NO.of contacts	Dimensions				
	A.	B.	C.	D.	E.		A.	B.	C.	D.	E.
4	3.70	0.50	1.50	2.40	4.00	54	16.20	13.00	14.00	14.90	8.00
6	4.20	1.00	2.00	2.90		56	16.70	13.50	14.50	15.40	
8	4.70	1.50	2.50	3.40		58	17.20	14.00	15.00	15.90	
10	5.20	2.00	3.00	3.90		60	17.70	14.50	15.50	16.40	
12	5.70	2.50	3.50	4.40		62	18.20	15.00	16.00	16.90	
14	6.20	3.00	4.00	4.90		64	18.70	15.50	16.50	17.40	
16	6.70	3.50	4.50	5.40		66	19.20	16.00	17.00	17.90	
18	7.20	4.00	5.00	5.90		68	19.70	16.50	17.50	18.40	
20	7.70	4.50	5.50	6.40		70	20.20	17.00	18.00	18.90	
22	8.20	5.00	6.00	6.90		72	20.70	17.50	18.50	19.40	
24	8.70	5.50	6.50	7.40	8.00	74	21.20	18.00	19.00	19.90	
26	9.20	6.00	7.00	7.90		76	21.70	18.50	19.50	20.40	
28	9.70	6.50	7.50	8.40		78	22.20	19.00	20.00	20.90	
30	10.20	7.00	8.00	8.90		80	22.70	19.50	20.50	21.40	
32	10.70	7.50	8.50	9.40		82	23.20	20.00	21.00	21.90	
34	11.20	8.00	9.00	9.90		84	23.70	20.50	21.50	22.40	
36	11.70	8.50	9.50	10.40		86	24.20	21.00	22.00	22.90	
38	12.20	9.00	10.00	10.90		88	24.70	21.50	22.50	23.40	
40	12.70	9.50	10.50	11.40		90	25.20	22.00	23.00	23.90	
42	13.20	10.00	11.00	11.90		92	25.70	22.50	23.50	24.40	
44	13.70	10.50	11.50	12.40		94	26.20	23.00	24.00	24.90	
46	14.20	11.00	12.00	12.90		96	26.70	23.50	24.50	25.40	
48	14.70	11.50	12.50	13.40		98	27.20	24.00	25.00	25.90	
50	15.20	12.00	13.00	13.90		100	27.70	24.50	25.50	26.40	

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0335-1



深圳市步步精科技有限公司

.X: ± 0.38 .X*: ± 3
.XX: ± 0.25 .X*: ± 2
.XXX: ± 0.13 .X*: ± 1

NAME:板对板连接器 公座 0.5-2x20P 双槽BTB PLUG
合高H=6.0 SMT 带柱

APPD. JM_Zheng
CHKD. LYX
DR. TSP

PJ. NO.:
SIZE: A4 DRW NO.:
FINISH: SEE NOTES MAT'L.: SEE NOTES
SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2


REV.	ECN NO	CONTENT	DATE	ENGINEER
A0				

NOTE:


- 1.10 Sprocket hole pitch cumulative tolerance ± 0.20 .
2. Carrier camber is within 1mm in 100mm.
3. Material: black conductive polystyrene alloy.
4. Material Thickness: 0.3 ± 0.05 mm.
5. All dimensions meet EIA-481-B requirements.
6. 5000pcs Pef Reel.
7. For tape width(dim W)16 and 24mm pilot holes are provided on one sides.
For tape width(dim W)32, 44 and 56mm pilot holes are provided on both sides.



Tape width 16 and 24 mm

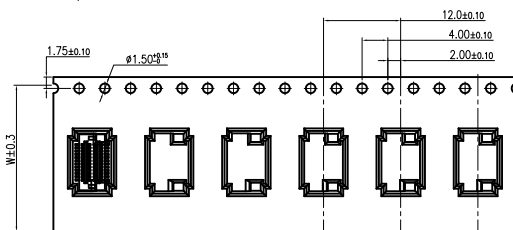

Tape width 32 and 44 mm

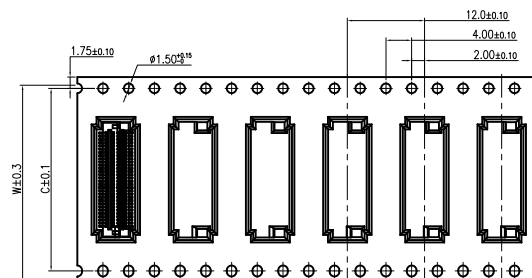

PULL OUT DIRECTION

PULL OUT DIRECTION

COVER TAPE
(上盖带)

PULL OUT DIRECTION

(PEELING ANGLE)

CARRIER TAPE
(下载带)

SAFE TAPE
(安全带L=1750mm Ref)

SCALE 1:4

W+4

REEL
(胶盘)



GP LABLE
(环保标签)
(1PCS)

ø13.5

PS

LABLE
(标签)

ø330

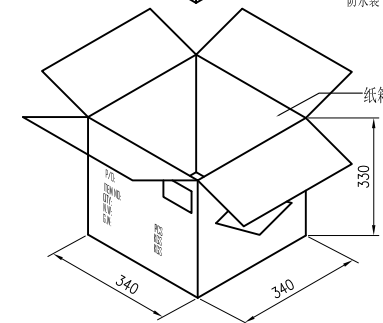

PIN NO.	W	C	PCS /REEL	REEL/CARTON	SUM(PCS)
4PIN~20PIN	16	-	1000	15	15000
22PIN~52PIN	24	-	1000	10	10000
54PIN~70PIN	32	28.4	1000	8	8000
72PIN~100PIN	44	40.4	1000	6	6000

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co., Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0335-1

深圳市步步精科技有限公司		NAME: 板对板连接器 公座 0.5-2x20P 双槽BTB PLUG 合高H=6.0 SMT 带柱	
.X: ± 0.38	X': $\pm 3'$	PJ. NO.: SIZE: A4 DRW NO.:	
.XX: ± 0.25	X': $\pm 2'$		
.XXX: ± 0.13	.XX': $\pm 1'$	FINISH: SEE NOTES MAT'L.: SEE NOTES	
APPD. JM_Zheng	CHKD. LYX	SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	
DR. TSP			