

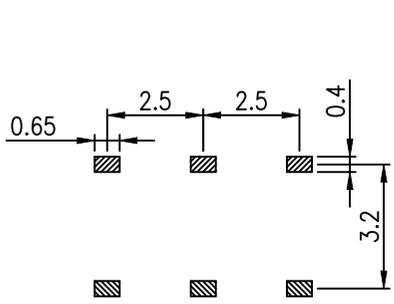
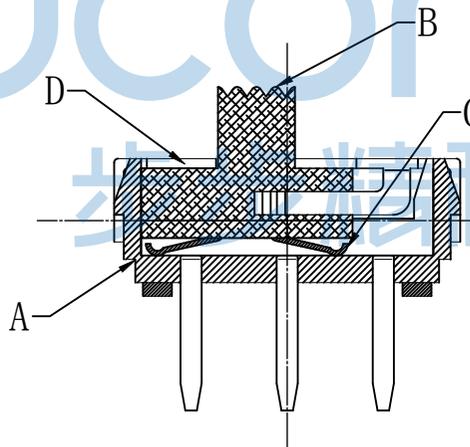
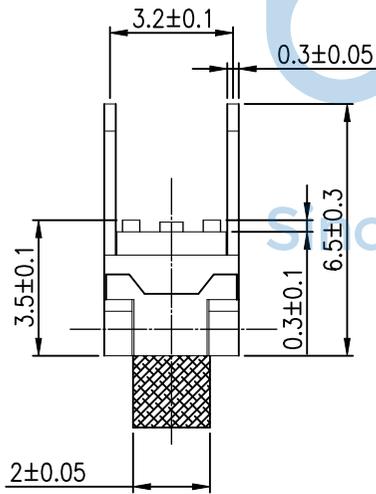
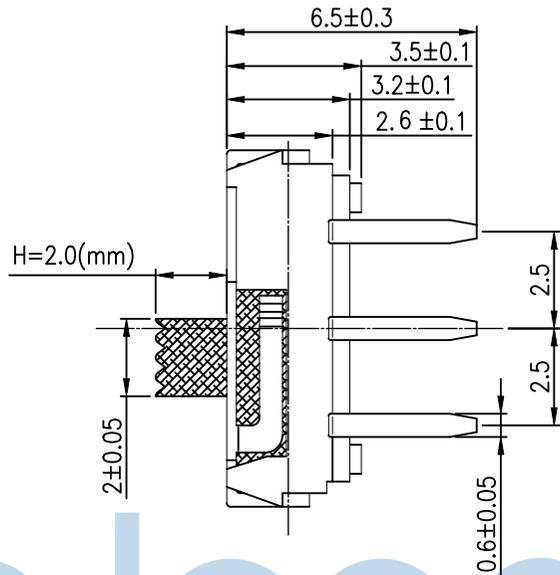


REV.	ECN NO.	CONTENT	DATE	ENGINEER
AO				

项 目	规 格
额定范围:	50mA DC12V
绝缘电阻:	100mΩ min(DC100V)
耐压强度:	AC100V(50/60Hz foy 1 minute)
机械寿命:	10,000 cycles
操作温度:	-10°c~ +60
操作力度:	200±100gf
行程:	2.0mm
材料属性:	环保 (SGS)

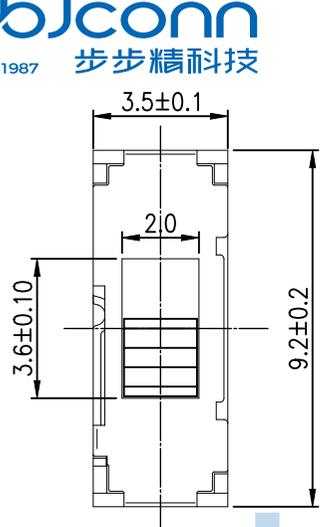

D	盖 子	1	进口不锈钢	银白色
C	接 触 簧 片	2	进口复银磷青铜	银白色镶银
B	按 键	1	进口增强尼龙	黑 色
A	底 座	1	P P A与黄铜	黑色与镀银
序号	名 称	数量	材 料	镀涂 颜色

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.

PDWG:NO: 0106-1

APPD. JM_Zheng

CHKD. LYX

DR. TSP

NAME: 拨动开关 SK-052A-G2.0 立式 六脚插件 无柱 DIP

PJ. NO.: SS.01.01-02-4003


SIZE: A4 DRW NO.:

FINISH: SEE NOTES MAT'L.: SEE NOTES


SCALE: N/A REV.: AO UNIT: mm PAGE: 1/2

深圳市步步精科技有限公司

PE袋规格: 260*185

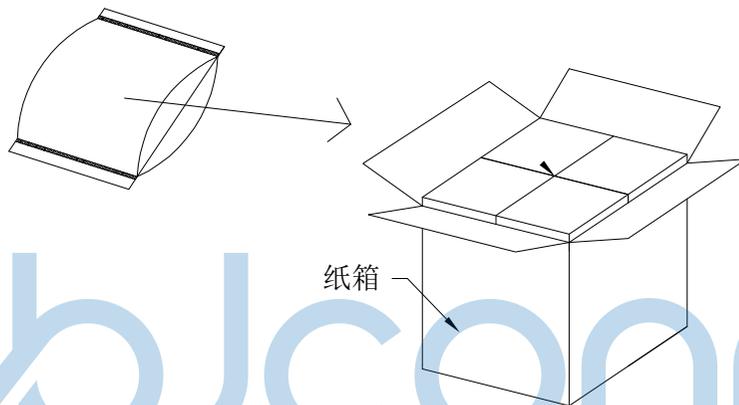

成品标签



1. 包装要求:

- 1.1 每个PE袋包装1000pcs;
- 1.2 每1袋放一小纸盒;
- 1.3 每20个小纸盒放一个纸箱, 共计20000pcs;
- 1.4 纸箱外贴上标签



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 .X: ±0.38 .X': ±3" .XX: ±0.25 .X'': ±2" .XXX: ±0.13 .XX': ±1"		NAME: 拨动开关 SK-052A-G2.0 立式 六脚插件 无柱 DIP PJ. NO.: SS.01.01-02-4003 SIZE: A4 DRW NO.: FINISH: SEE NOTES MAT'L.: SEE NOTES SCALE: N/A REV.: AO UNIT: mm PAGE: 2/2	
APPD.	JM_Zheng				
CHKD.	LYX				
PDWG.NO:	0106-1	DR.	TSP		