



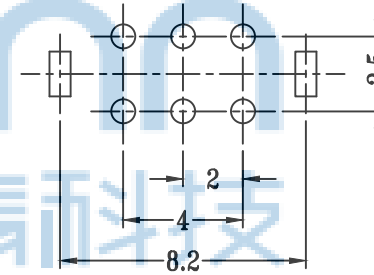


REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	SGF

额定值：0.3A 50VDC
接触电阻：100mΩ max
绝缘电阻：100MΩ MIN
耐电压：AC 500V
寿命：10000
工作温度：-25 +85

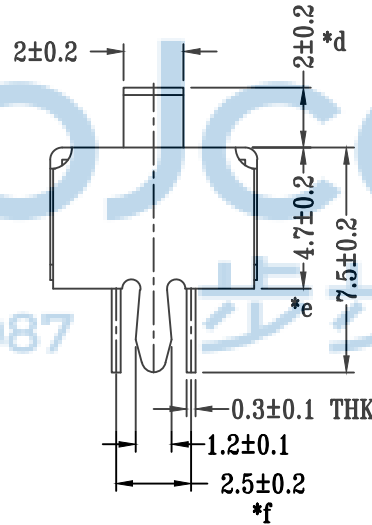

SCHEMATIC (NON-SHORTING)

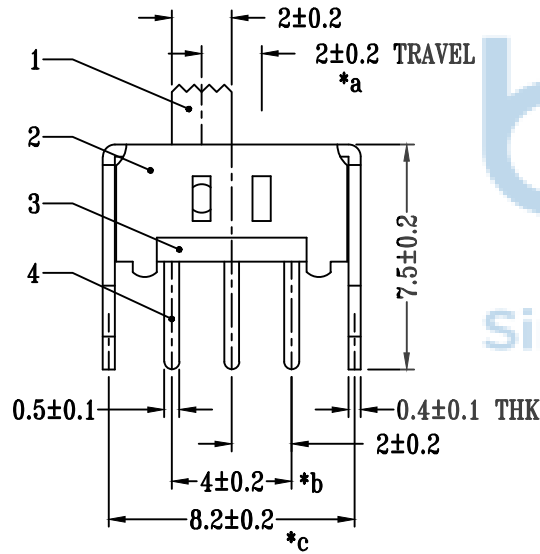




P.C.B LAYOUT
BOTTOM VIEW

注：“*”表示关键尺寸(6个).



NO.	PARTS	MATERIALS	Q'TY	FINISH
8				
7				
6	SPRING PLATE	PBS STRIP	1	NATURAL
5	CONTACT CLIP	PBS STRIP	2	Ag PLATED
4	TERMINAL	BRASS STRIP	6	Ag PLATED
3	BASE	PHENOLIC RESIN	1	NATURAL
2	FRAME	STEEL STRIP	1	Ni PLATED
1	KNOB	POM	1	BLACK

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 .X: ±0.38 .X': ±3" .XX: ±0.25 .X": ±2" .XXX: ±0.13 .XX": ±1"		NAME: 拨动开关 SS22D03G2 六脚直插	
APPD.	JM_Zheng	PJ. NO.: SS.02.01-02-1001		SIZE: A4 DRW NO.:	
CHKD.	LYX	FINISH: SEE NOTES		MAT'L.: SEE NOTES	
PDWG.NO:	0101-1	DR.	SGF	SCALE: N/A	REV.: A0 UNIT: mm PAGE: 1/2

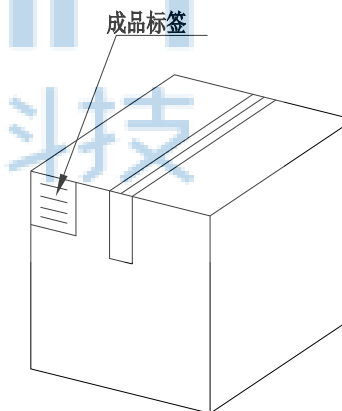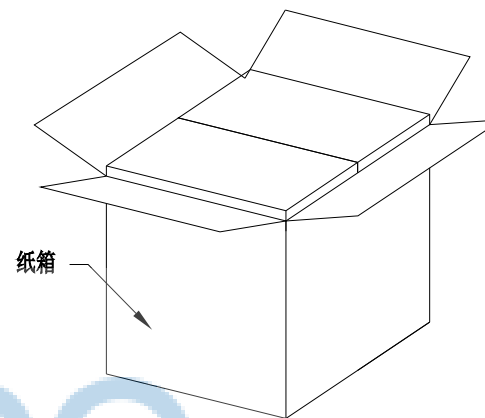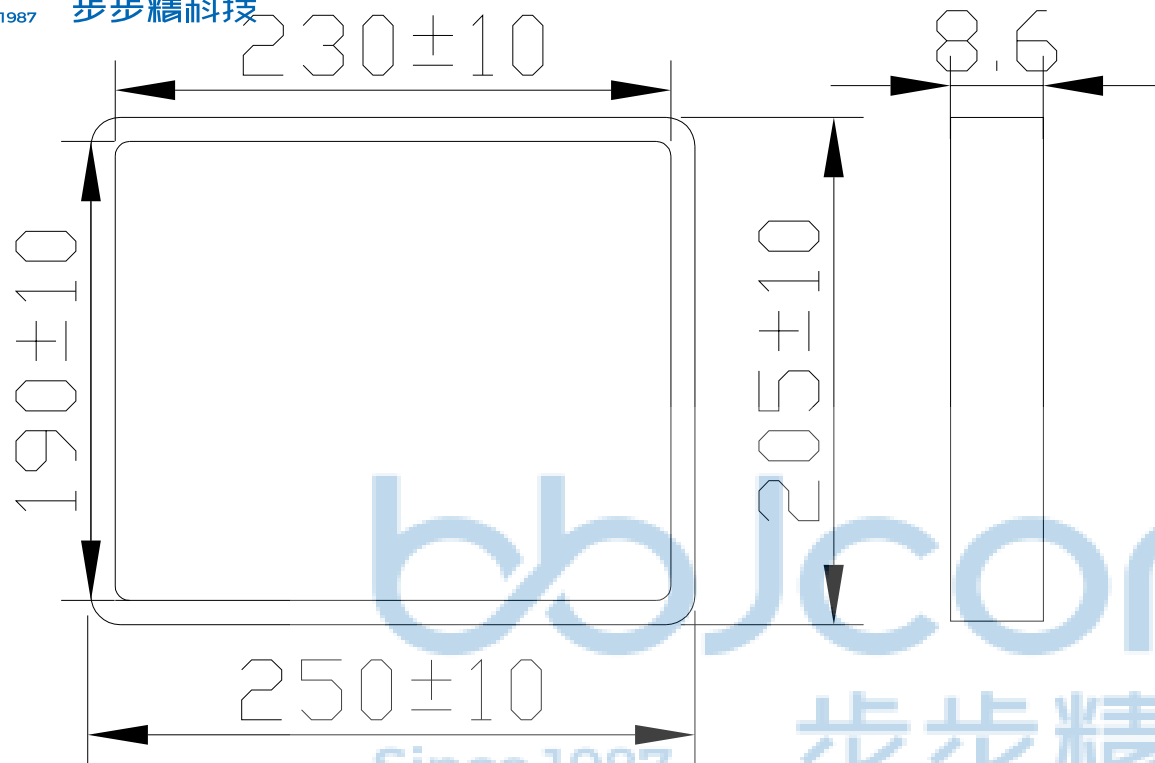

1. 包装要求:

- 1.1 每盒吸塑盒包装2000 pcs;
- 1.2 每20盘放一箱, 共计40000PCS;
- 1.3 纸箱外贴上标签



纸箱规格: 350*210*290

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
PDWG.NO: 0101-1		NAME: 拨动开关 SS22D03G2 六脚直插	
APPD. JM_Zheng	CHKD. LYX	PJ. NO.: SS.02.01-02-1001	
DR. SGF		SIZE: A4 DRW NO.:	
		FINISH: SEE NOTES MAT'L.: SEE NOTES	
		SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	