

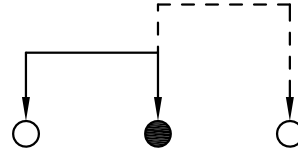
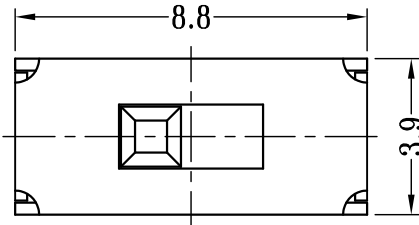



REV.	ECN NO	CONTENT	DATE	ENGINEER
A0				

额定值：0.3A 50VDC
接触电阻：100mΩ max
绝缘电阻：100MΩ MIN
耐电压：AC 500V
寿命：10000
工作温度：-25 +85

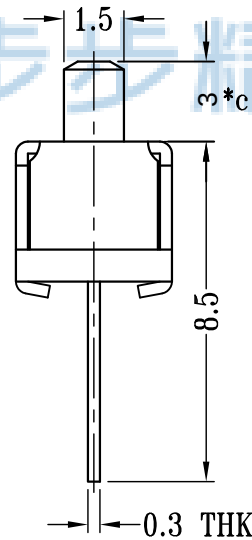

SCHEMATIC (NON-SHORTING)

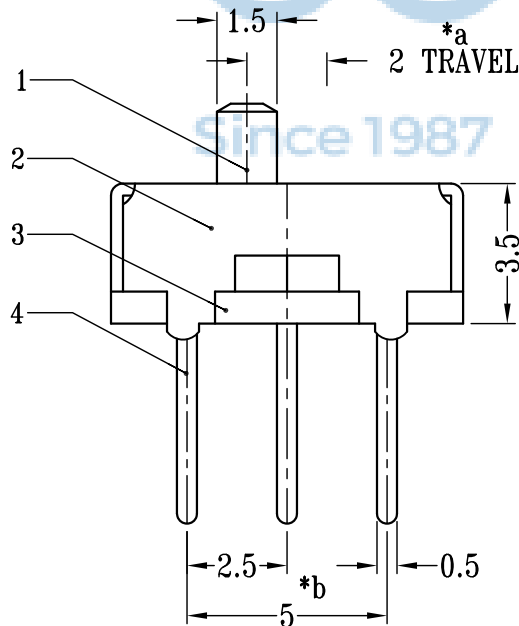

P.C.B LAYOUT
BOTTOM VIEW



注：“*”表示关键尺寸(3个)



NO.	PARTS	MATERIALS	QTY	FINISH
6				
5	CONTACT CLIP	PBS STRIP	1	Ag PLATED
4	TERMINAL	BRASS STRIP	3	Ag PLATED
3	BASE	PHENOLIC RESIN	1	NATURAL
2	FRAME	STEEL STRIP	1	Ni PLATEFD
1	KNOB	POM	1	BLACK



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		.X: ±0.38 X*: ±3* .XX: ±0.25 .X*: ±2* .XXX: ±0.13 .XX*: ±1*		NAME: 拨动开关 SS12D01G3 无唛高温 三脚插	
PDWG.NO: 0101-1	DR.	LHC	APPD.	JM_Zheng	PJ. NO.: SS.02.01-04-1007
			CHKD.	LYX	SIZE: A4 DRW NO.:
					FINISH: SEE NOTES MAT'L.: SEE NOTES
					SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2

REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0				

PE袋规格:***X*** (以实际出货为准)

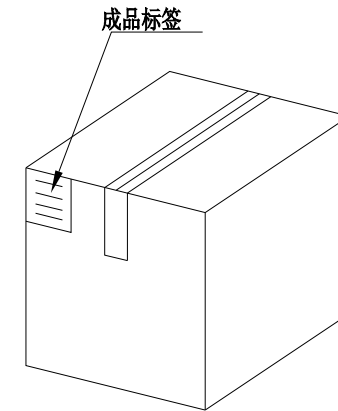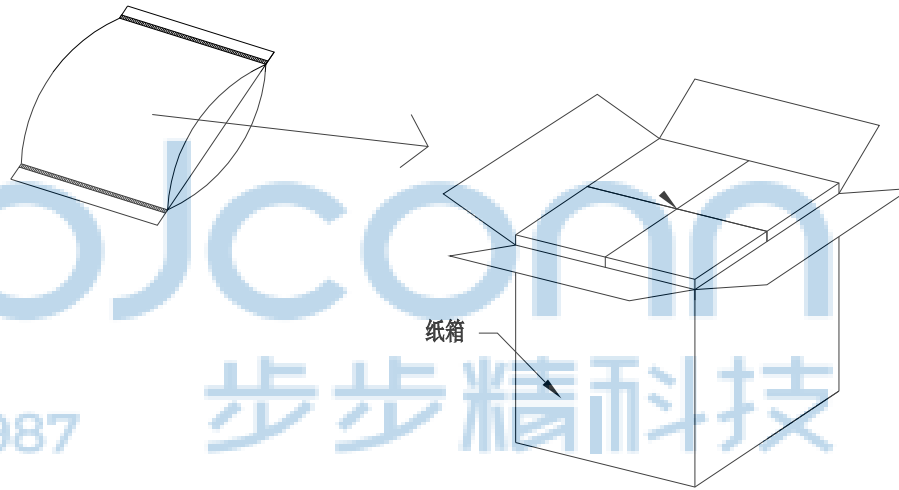

1. 包装要求:
- 1.1 每PE袋包装1000 pcs;
- 1.2 每1袋放一小纸盒;
- 1.3 每20个小纸盒放一个纸箱, 共计20000PCS
- 1.4 纸箱外贴上标签



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.				深圳市步步精科技有限公司			
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3" .X*: ±2" .XX*: ±1"		NAME: 拨动开关 SS12D01G3 无唛高温 三脚插			
APPD. JM_Zheng		CHKD. LYX		PJ. NO.: SS.02.01-04-1007			
PDWG.NO: 0101-1		DR. LHC		SIZE: A4 DRW NO.:			
				FINISH: SEE NOTES MAT'L.: SEE NOTES			
				SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2			