
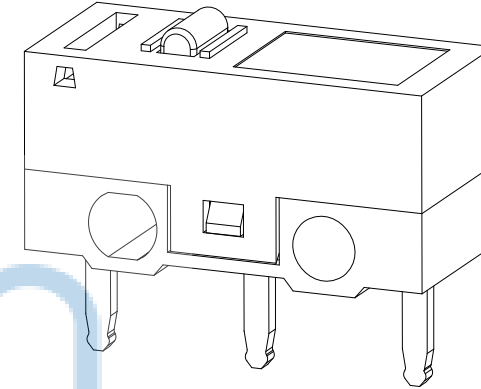
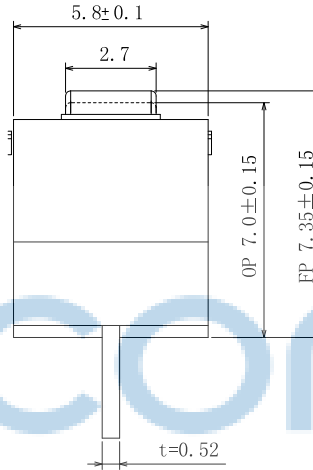
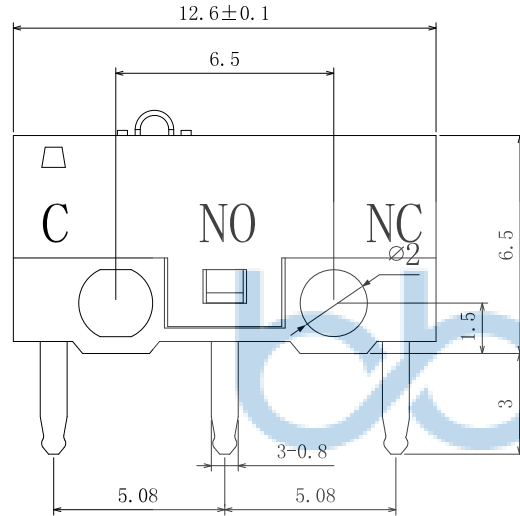


印制线路板
Recommended P.C.B layout

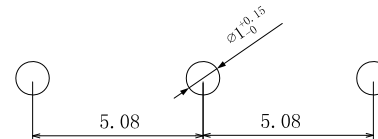


- 1、工作电压 Working Voltage : 30V DC;
- 2、工作电流 Working Current: 0.05A;
- 3、接触电阻 Contact Resistance: $\leq 100\text{m}\Omega$;
- 4、绝缘电阻 Insulation Resistance: $\geq 100\text{M}\Omega$;
- 5、动作力 Press Force: 100gf;
- 6、寿命 Life: >1,000,000次。

配件:

1. 按柄 POM日本三菱F20-30
2. 上盖和基座:PA66
3. 卡件:黄铜
4. 簧片:磷青铜





电路简图
SCHEMATIC



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
PDWG.NO: 0104-1	DR. SGF	NAME: 小微动不带柄纯银触点环保透明基座	
APPD. JM_Zheng	CHKD. LYX	PJ. NO.: WK.01.01-11-0001	
		SIZE: A4	DRW NO.:
		FINISH: SEE NOTES	MAT'L.: SEE NOTES
		SCALE: N/A	REV.: A0
		UNIT: mm	PAGE: 1/2

PE袋规格:***X*** (以实际出货为准)

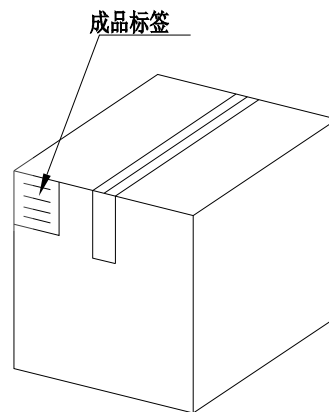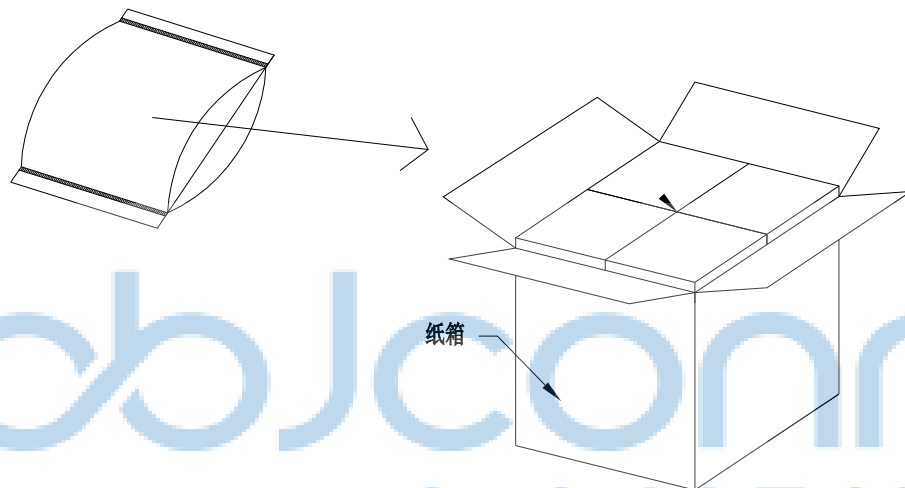

1. 包装要求:

- 1.1 每PE袋包装 1000pcs;
- 1.2 每1袋放一小纸盒;
- 1.3 每20个小纸盒放一个纸箱, 共计20000PCS
- 1.4 纸箱外贴上标签



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG.NO: 0104-1		深圳市步步精科技有限公司						
		.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X": ±3" .X": ±2" .XX": ±1"		NAME: 小微动不带柄纯银触点环保透明基座		
		APPD.	JM_Zheng				PJ. NO.: WK.01.01-11-0001	
		CHKD.	LYX				SIZE: A4 DRW NO.:	
		DR.	SGF			FINISH: SEE NOTES		MAT'L.: SEE NOTES
SCALE: N/A		REV.: A0		UNIT: mm		PAGE: 2/2		