

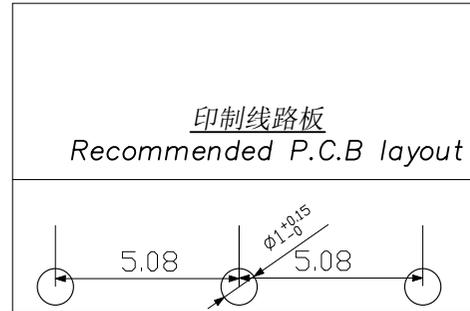
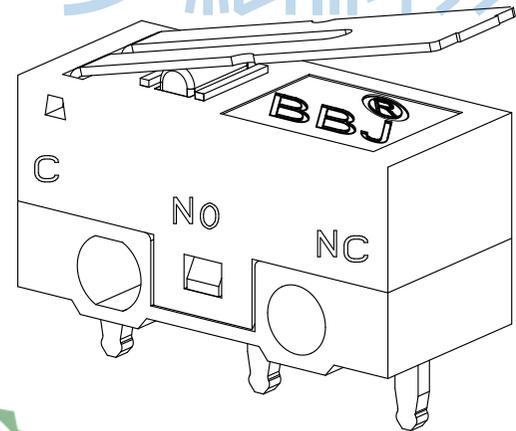


REV.	ECN NO.	CONTENT	DATE	ENGINEER
AO		Initial Release	/	LHC

- 1、工作电压 Working Voltage : 30V DC;
- 2、工作电流 Working Current: 0.05A;
- 3、接触电阻 Contact Resistance: $\leq 100\text{m}\Omega$;
- 4、绝缘电阻 Insulation Resistance: $\geq 100\text{M}\Omega$;
- 5、动作力 Press Force: 30N MAX;
- 6、寿命 Life: ≥ 1000000 次。

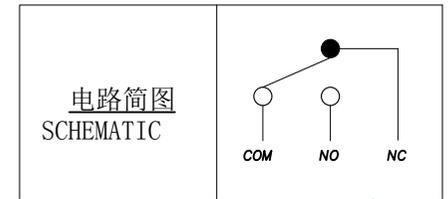

NO.	DESCRIPTION	MATERIAL	COLOR	REMARK
6	盖板	PA66	黑色	-----
5	按柄	POM	红色	-----
4	簧片	磷铜	-----	-----
3	触点	纯银	-----	-----
2	基座	PPA	白色	-----
1	端子	H62Y 0.5mm	-----	表面镀银

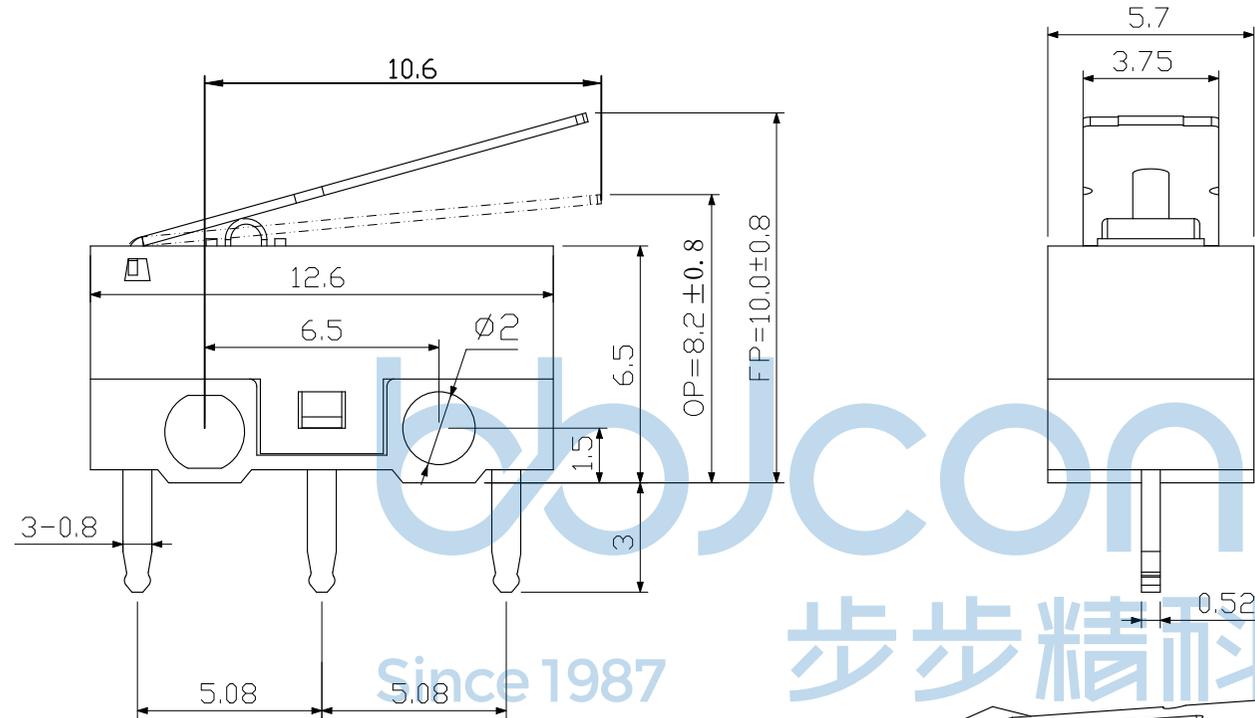

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.

PDWG.NO: 0104-1

深圳市步步精科技有限公司

NAME: 微动开关 小微动 带柄 柄长10.6 PPA白色基座 (KW10-01ART01)

APPD. JM_Zheng



CHKD. LYX

DR. LHC

PJ. NO.:
SIZE: A4 | DRW NO.:
FINISH: SEE NOTES | MAT'L.: SEE NOTES
SCALE: N/A | REV.: AO | UNIT: mm | PAGE: 1/2

REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial Release	/	LHC

PE袋规格: 260*185

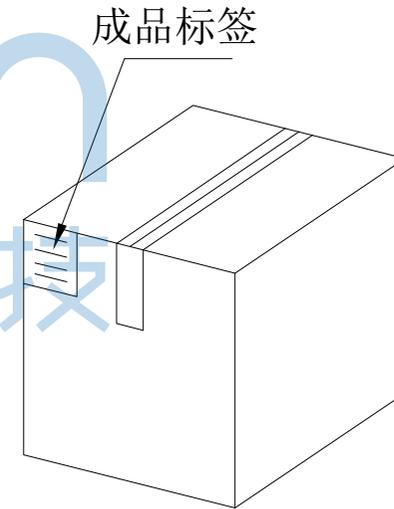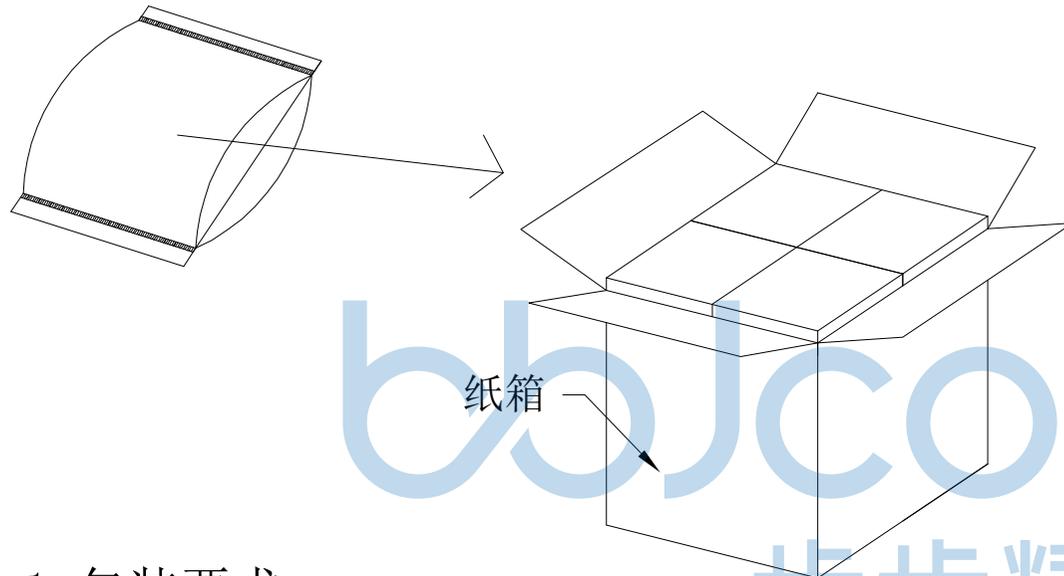

1. 包装要求:

- 1.1 每个PE袋包装 500 pcs ;
- 1.2 每1袋放一小纸盒;
- 1.3 每20个小纸盒放一个纸箱, 共计 10000 pcs ;
- 1.4 纸箱外贴上标签



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 .X: ±0.38 .X': ±3" .XX: ±0.25 .X": ±2" .XXX: ±0.13 .XX': ±1"	
APPD.	JM_Zheng	NAME: 微动开关 小微动 带柄 柄长10.6 PPA白色基座 (KW10-01ART01)	
CHKD.	LYX	PJ. NO.:	
PDWG.NO:	0104-1	SIZE: A4 DRW NO.:	
DR.	LHC	FINISH: SEE NOTES MAT'L.: SEE NOTES	
		SCALE: N/A	REV.: A0 UNIT: mm PAGE: 2/2