


脚弯右



Rating	1A 125VVAC
Contact Resistance	500mΩ Max
Insulation Resistance	>100MΩ DC500V
Withstand Voltage	AC500V 1min.
Soldering Temper.	235±5℃ 5s
Electrical Life	100,000 cycles
Mechanical Life	100,000 cycles
Ambient Temper. Used	-25℃ to +85℃
Ambient Humidity Used	≤85% at +40℃
Operating Force	30 ±15gf max

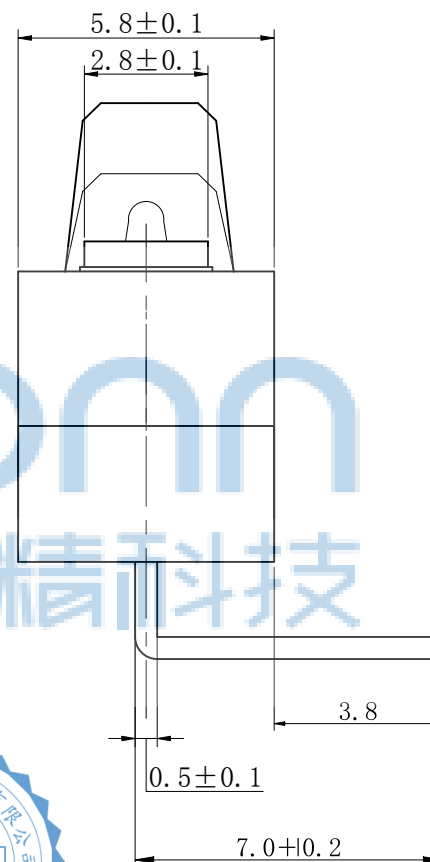

序 号	零 件	用 量	材 质	电镀/颜色
1	接触脚	3	黄铜 0.52MM	镀银（白色）
2	基 座	1	PBT（白色）	
3	弹 片	1	古河铜 0.075MM	
4	触 点	1	银/铜点 $\phi 0.6$	
5	盖 子	1	PBT（黑色）	
6	按 钮	1	POM（白色）	
7	手 柄	1	不锈钢 201	



深圳市步步精科技有限公司

NAME: 微动开关 小微动 直柄 脚右弯
白色基座 耐高温260度

APPD.	JM_Zheng
CHKD.	LYX


	PJ. NO. : WK. 01.02-25-0001	
	SIZE: A4	DRW NO.:

DR.	LHC
-----	-----


FINISH: SEE NOTES		MAT'L.: SEE NOTES	
SCALE: N/A	REV.: A3	UNIT: mm	PAGE: 1/1

REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0				

PE袋规格: 260*185

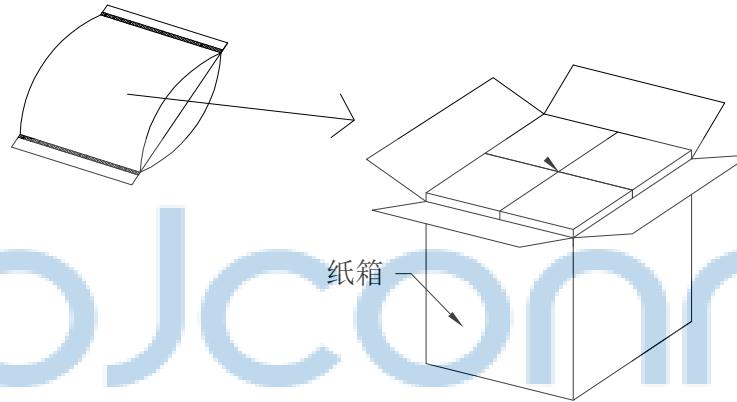

成品标签



1. 包装要求:
- 1.1 每个PE袋包装200pcs;
 - 1.2 每1袋放一小纸盒;
 - 1.3 每10个小纸盒放一个纸箱, 共计2000pcs;
 - 1.4 纸箱外贴上标签

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG,NO.0231-1		深圳市步步精科技有限公司				
		.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3* X*: ±2* XX*: ±1*		
	NAME: 微动开关 小微动 直柄 脚右弯 白色基座 耐高温260度					
	APPD.	JM_Zheng		PJ. NO.WK. 01. 02-25-0001		
	CHKD.	LYX		SIZE: A4	DRW NO.:	
		FINISH: SEE NOTES		MAT'L.: SEE NOTES		
		SCALE: N/A		REV.: A3	UNIT: mm	PAGE: 1/1