



REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		初始发行	2023.07.08	ZY

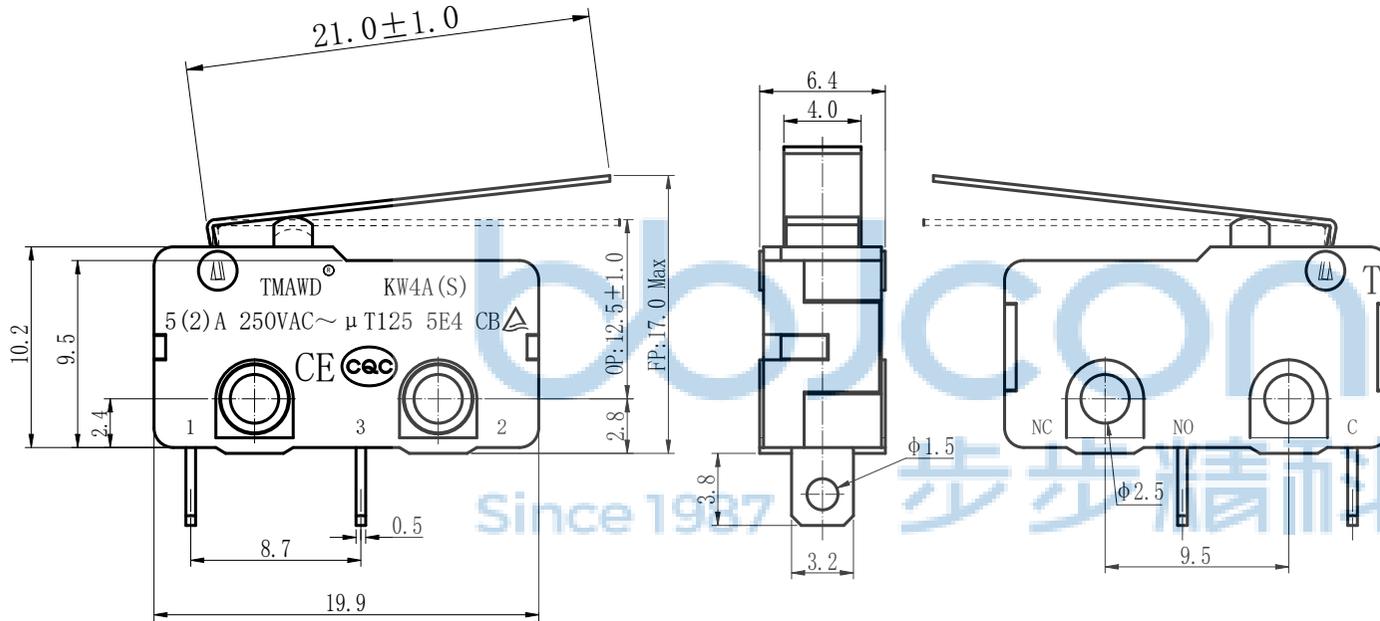

- 技术要求:
- 电参数Rating: 5(2)A 250VAC 5A 36VDC;
 - 接触电阻Contact Resistance: ≤50mΩ;
 - 绝缘电阻Insulation Resistance: DC 500V 100MΩ Min;
 - 介电强度Dielectric Strength:
针脚-针脚 Terminal-Terminal AC 500V 10mA/5S;
针脚-手柄 Terminal-knob AC 3000V 10mA/5S;
 - 电气寿命Load Life: 50000 Cycles;
 - 操作力Operating Force: 20~100gf;
 - 工作温度Operating Temperature: -25℃~125℃;
 - 开关功能Switched Function: ON-(ON);
 - 触点: 银氧化锡


电气原理图
Circuit:




THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 工程部 APPROVED	
PDWG:NO: 0778-2	DR: ZY 2023.07.08	NAME: 微动开关 中微动 手柄长21mm 两脚插 (12-C-1)	PJ. NO.: WK.02.02-33-0002
		FINISH: SEE NOTES	MAT'L.: SEE NOTES
		SCALE: N/A	REV.: A0 UNIT: mm PAGE: 1/2

REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		初始发行	2023.07.08	ZY

PE袋规格: 260*185

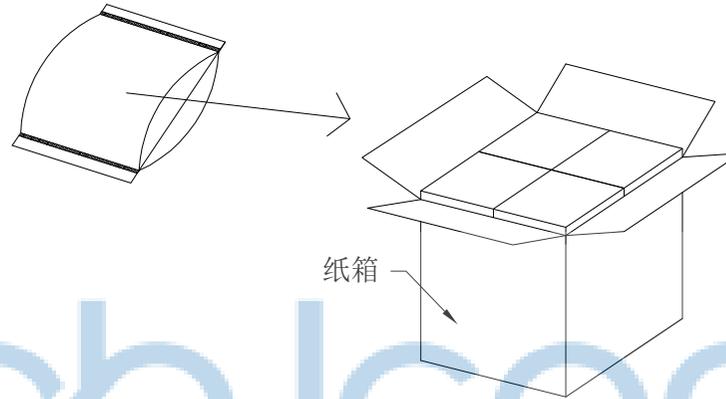

成品标签



1. 包装要求:

- 1.1 每个PE袋包装500pcs;
- 1.2 每2袋放一盒共1000PCS;
- 1.3 纸箱外贴上标签;



THIS DOCUMENT IS THE SOLE PROPERTY OF		深圳市步步精科技有限公司	
BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		NAME: 微动开关 中微动 直柄 柄长21mm 两脚插 (12-C-1)	
PDWG.NO: 0778-2		P.J. NO.: WK.02.02-33-0002	
DR. ZY 2023.07.08		SIZE: A4 DRW NO.:	
APPD. JM_Zheng 2023.07.08		FINISH: SEE NOTES MAT'L.: SEE NOTES	
CHKD. LYX 2023.07.08		SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	